




KUKKO

For more information on Kukko Bearing & Gear Pullers contact: CIE Clyde Industrial Equipment Ltd.
tel: 905-428-9696 1-888-831-1313 Fax: 905-428-6787 e-mail: cie@cie.on.ca web: www.ciecanada.com



Quality made in Germany

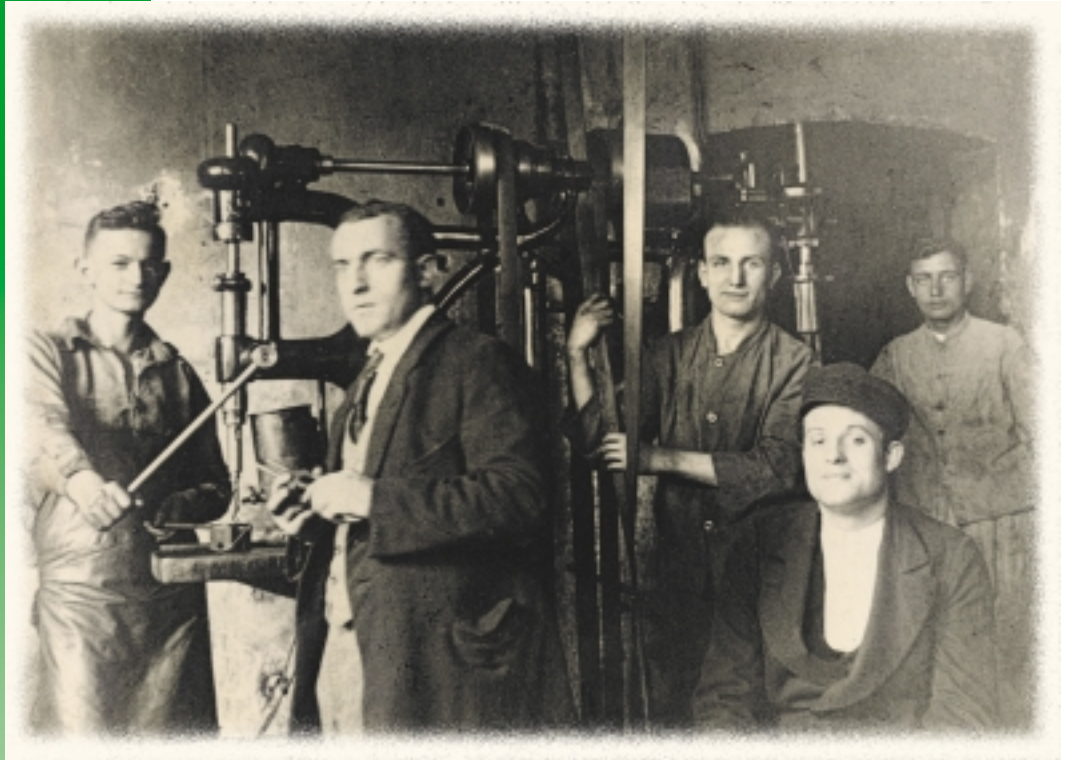

Founded in 1919 by Alfred Kleinbongartz and his brother-in-law Emil Kaiser, the **KUKKO** Tool Factory has remained to this very day a family owned, unincorporated partnership. Our brand name **KUKKO** is an acronym of the founders' initials. **KUKKO**, as the inventor of a whole new category of tools, has consistently set new and higher, unsurpassed and exemplary standards of use and quality with its pullers, separators, internal extractors and numerous other pulling and extracting tools.

No wonder, then, that **KUKKO** has long since become a global synonym for push/pull devices.

Our second-to-none product array, which covers all conceivable industrial, artisanal and automotive-sector tasks and contexts, has evolved from a steady stream of innovation in the tradition of our company's founders.

Our certification according to DIN EN ISO 9001 (EN 29001/BS, part 1) and adoption of T.Q.M. document the quality mandate, commitment and guiding principles of a product policy geared to the optimization of customer benefits.

This catalogue, with its straightforward, comprehensive informational content, is intended to facilitate both your work and our fruitful cooperation.



KUKKO Tool Factory

W. Kleinbongartz





Quality made in Germany

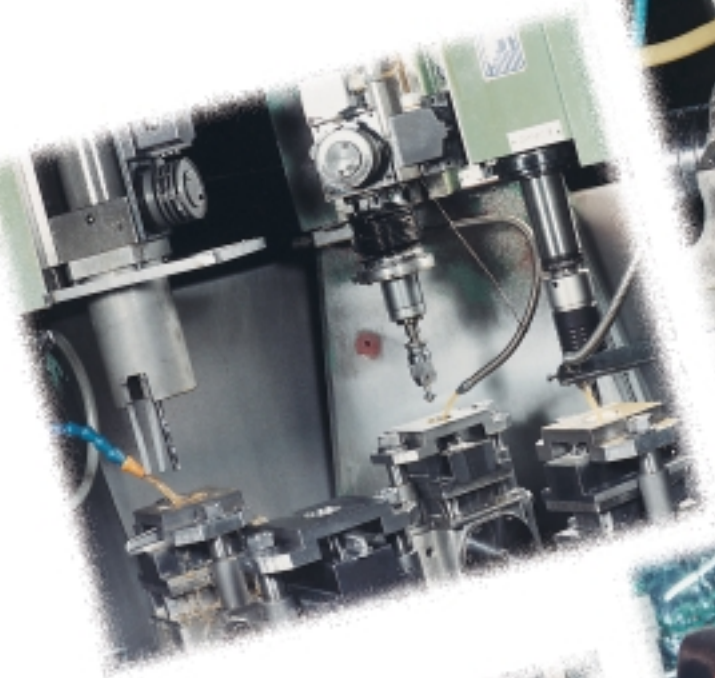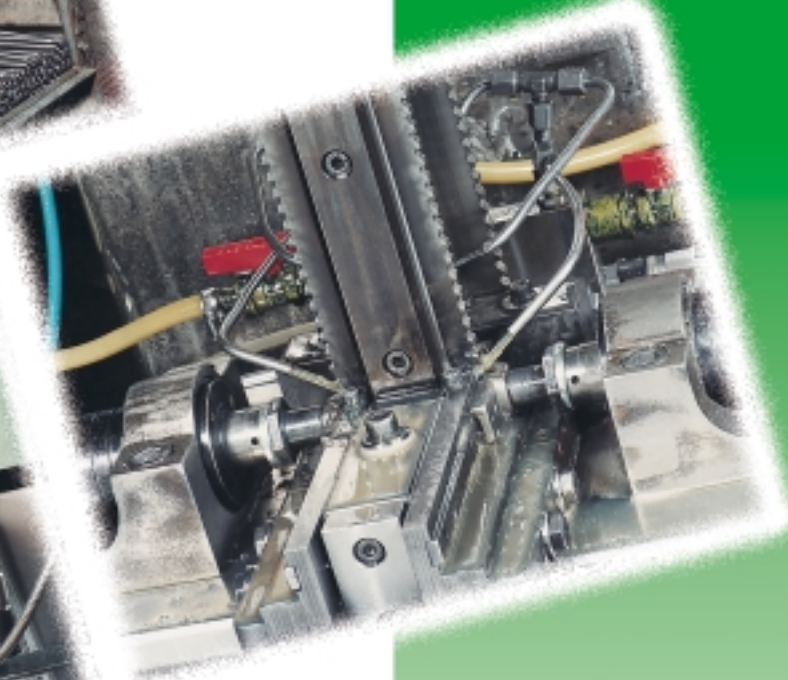

PULLER ABC


Choosing the right puller for the right job

Which type of puller do I need? Which combination works best?

... for pulling gear wheels, ball bearings, V-belt pulleys and the like off of shafts and axles.

💡 Sliding-arm pullers with two arms or three.

With deference to superior load distribution, three-arm pullers should - space permitting - always be given preference.



Range of choices:


- Sliding-arm pullers, belonging to type series 20, 30 or 11.
- Pullers with self-centering, self-aligning arms, belonging to type series 43, 44, 45, 482, 483 or to either 844 or 845 from the „800“-system series.
- Pullers with preselectable spread, belonging to type series 12.
- Pullers with self-centering spread adjuster, belonging to type series 112 or 113.
- Swivel-arm pullers, belonging to type series 41, 42, 46, 47, 201, 202, 203, 205, 206 or 207.
- Pullers with side clamp, belonging to type series 204 or 210.
- Pullers with slide hammer, belonging to types series 220.

... for pulling ball bearings, roller bearings, sleeves/bushes and other tight-fitting elements.

💡 Separators and separator pullers.

Range of choices:

- Separators and pulling tools, belonging to type series 15, 17 or 18.
- Separator pullers, belonging to types series 14, 204-0 or 210.




... for pulling items mounted on hollow shafts.

The choice of puller in this case is analogue to the above, but a step plate adapter must be inserted to help support the puller's forcing screw on the hollow shaft.

Range of choices:

Sets of step plate adapters, belonging to type series Y-18-17, Y-19-17 or Y-20-17.





... for pulling items with tapholes.

💡 Pullers with threaded adapter.


Range of choices:

- Pulling tools with threaded adapter, belonging to types series 18 or 18-AS.
- Pullers with slide hammer, belonging to type series 230.



PULLER ABC


... for pulling ball bearings, outer races of ball bearings, and bushes/liners out of boreholes.

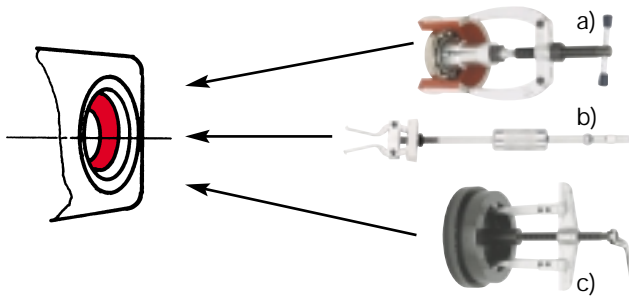

💡 Internal extractors.


Range of choices:

- a) Internal extractors with counterstays, belonging to type series 21, 22 or 16.
- b) Internal extractors with slide hammer, belonging to type series 221 or 224.
- c) Pullers, belonging to type series 20 or 30, with arms reversed.

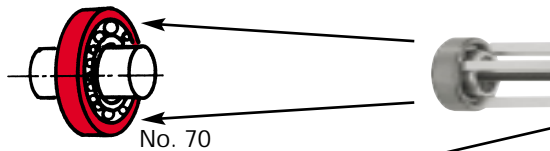

... for pulling and extracting ball bearings out of their housings.

Ball bearing extractors, belonging to type series 69 and 70.




... for pulling shafts or axles out of bearings.

Shafts are designed with a concentric shaft-protecting tapped bore.

💡 Pulling tool with threaded adapter.


Range of choices:

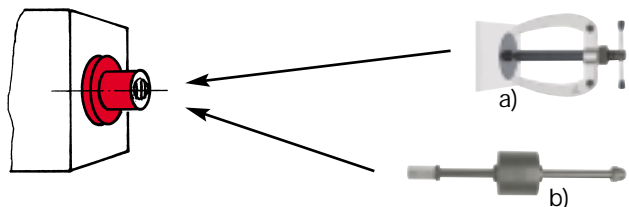

a) Counterstay with threaded adapter, belonging to type series 22 or 22-AS.

b) Puller with slide hammer and threaded adapter, belonging to type series 223.

Once the required type of tool has been determined, it is easy to pick the most suitable model from among the numerous type series listed in the catalogue. To pinpoint the size of tool you need, run through the spread and depth columns of the corresponding tables, and compare the listed dimensions with those involved in the job at hand.

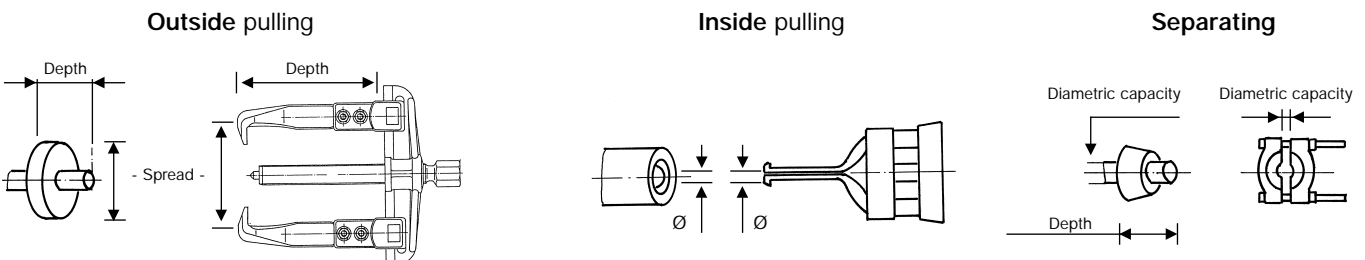

Normally, you can trust the selected model to handle the work you have in store for it. However, just to be absolutely sure, always choose the larger of any models with overlapping job-dimension ranges.

The technical appendix of this catalogue, which you'll find on pages 94-101, offers detailed dimensional and performance data for all the different models, in addition to safety instructions and useful tips for working with pulling tools.

Then, on pages 58 and 59, you'll find the appropriate driving tools for controlled application of force.

Illustrations

indicate the present status. The designs may, however, be altered without special notice, e.g., in the interest of technical progress.

Errata

and misprints excepted.

Weights

are quoted as averages and therefore not binding.

Information

on working with push/pull devices is provided on page 89, 92, 93.

Performance


data are based on the maximum rating. The load to be applied must be adjusted during each application to the actual conditions, the safety requirements and the operating instructions (as-intended use).

Dimensional

details are only approximate and therefore given subject to pertinent modifications and technical progress.

Quality assurance





by means of a Quality Management System certified according to DIN EN ISO 9001.

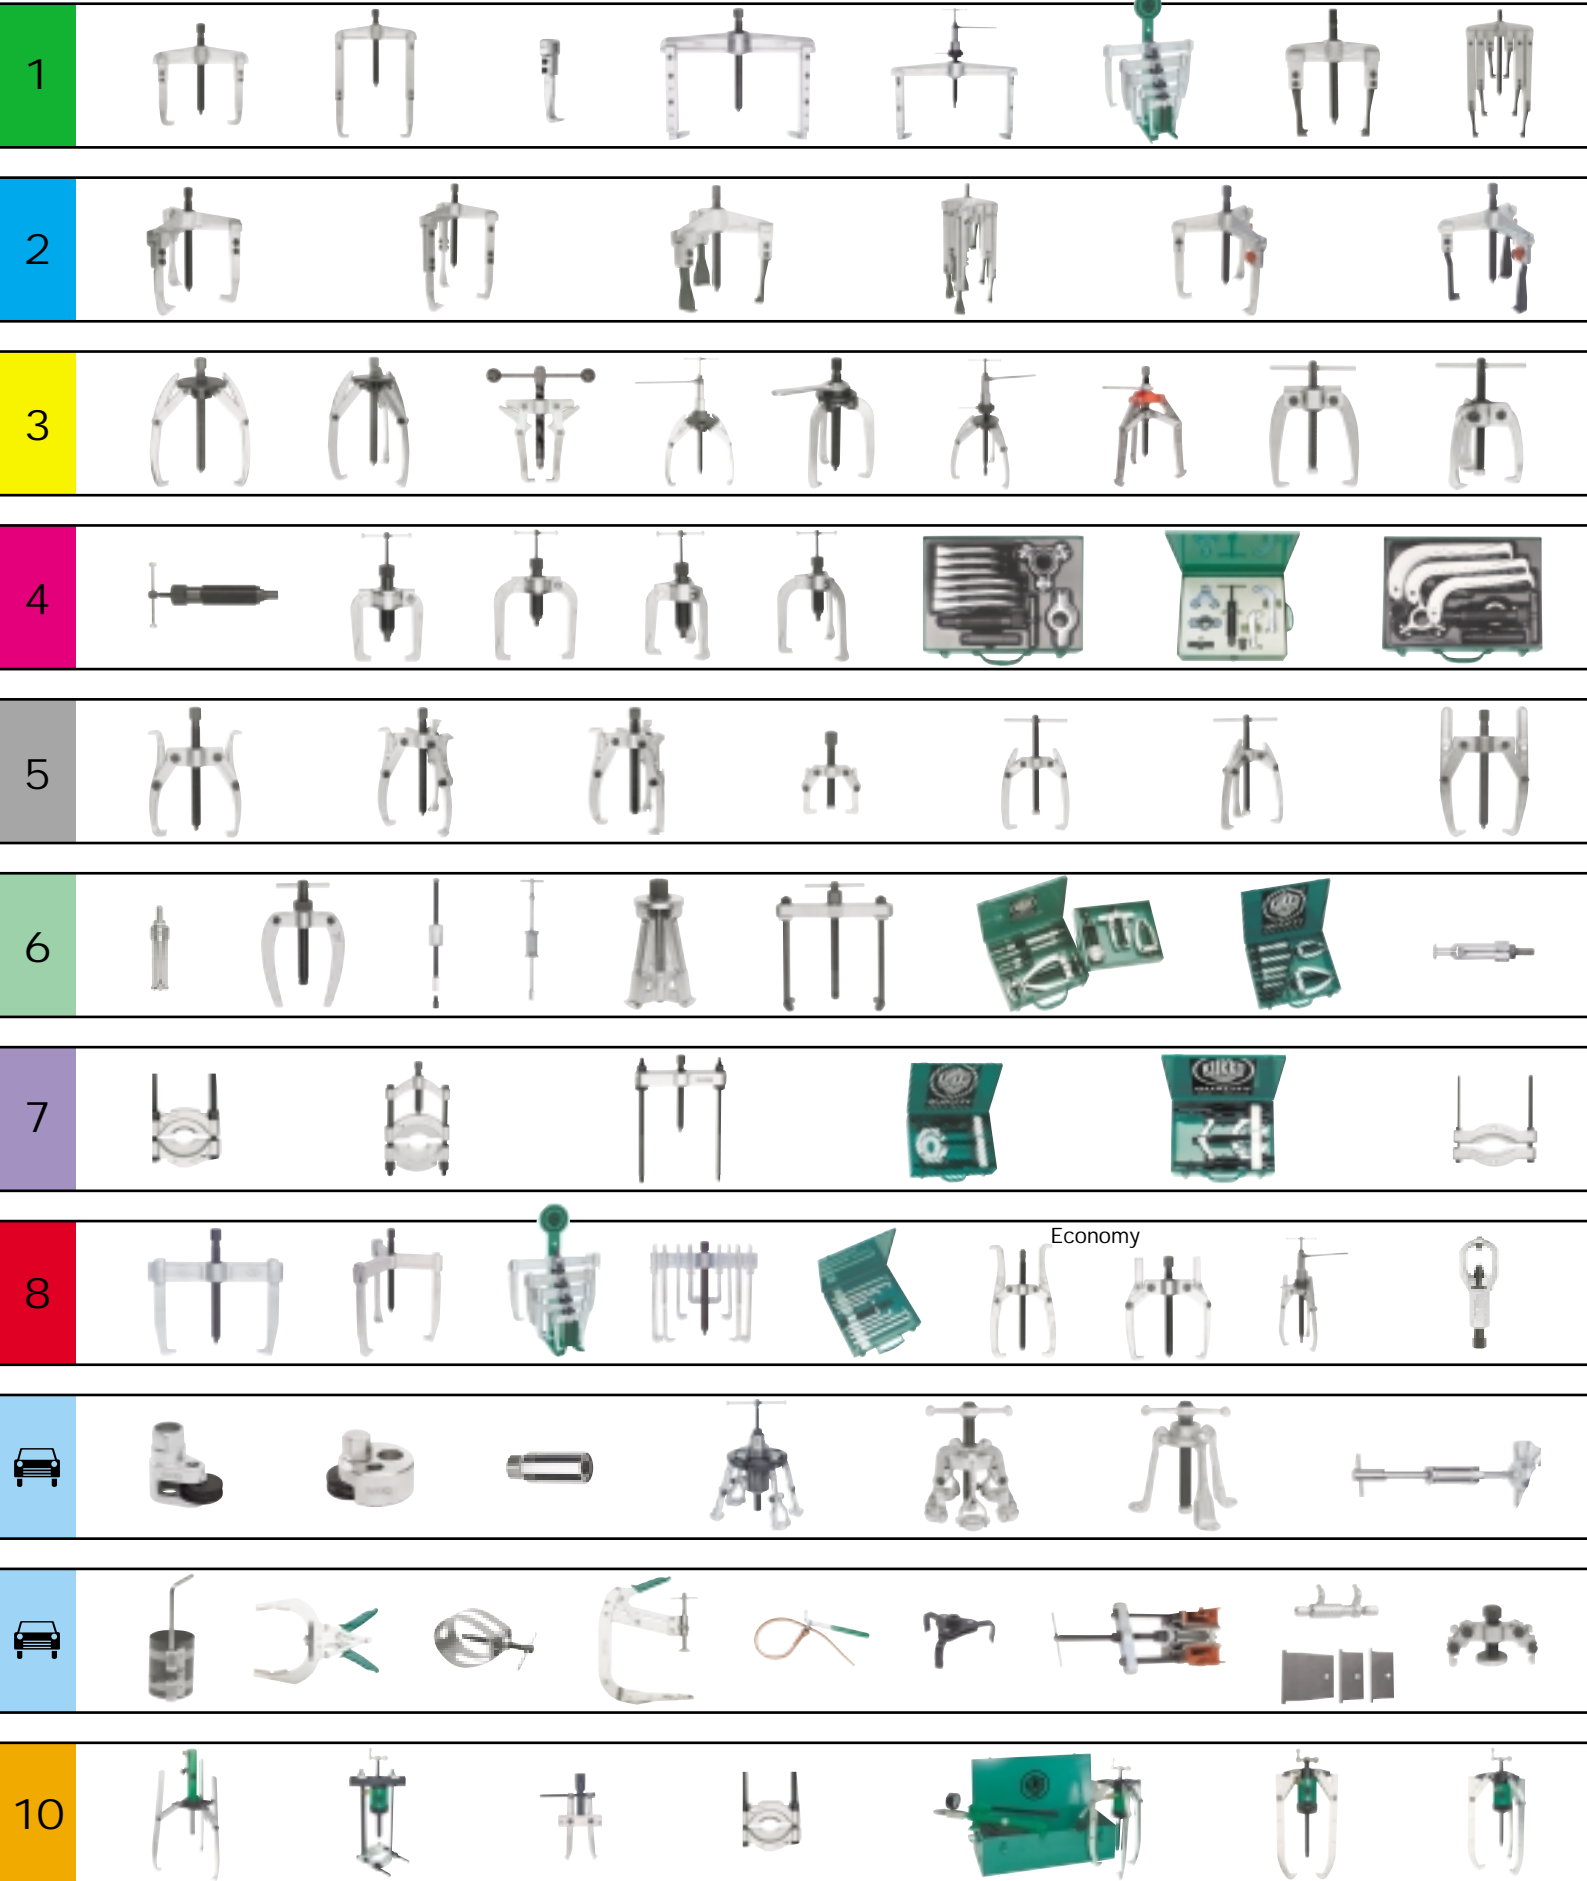


Economy



KUKKO - the Original

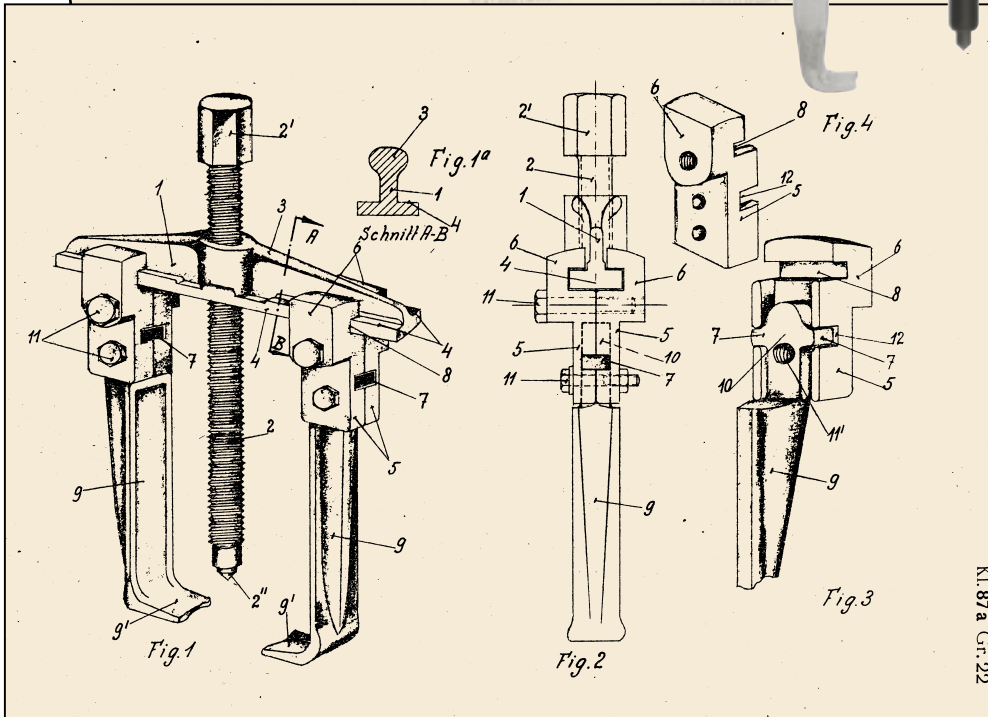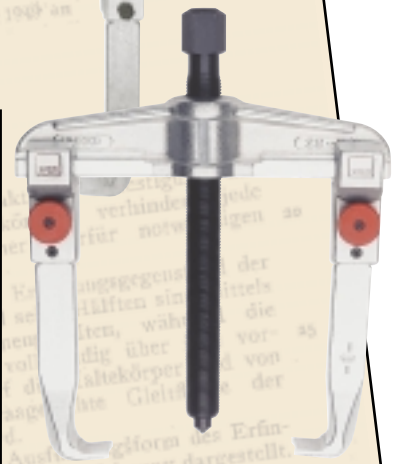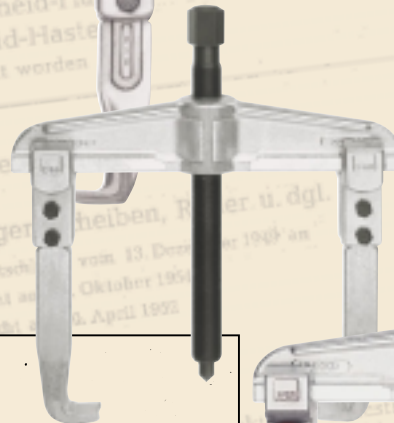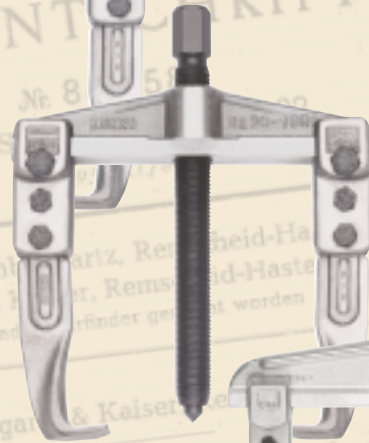


KUKKO - the Original

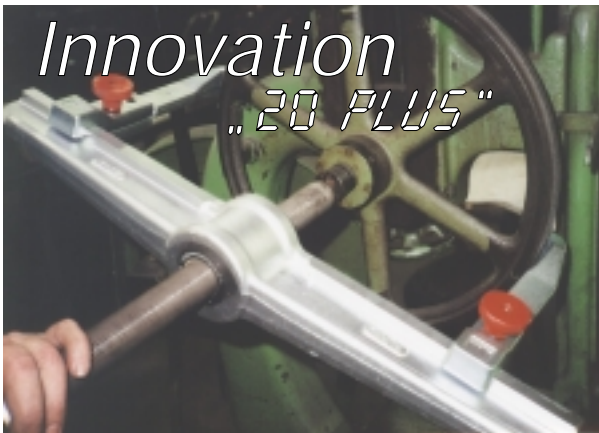

Engineered to maturity in every detail, neatly drop forged, precision machined on state-of-the-art production equipment, carefully hardened and tempered, expertly assembled, and load-tested - in other words, KUKKO quality made in Germany.

- Ribbed **puller head sections**, carefully calculated for high rigidity, with smooth-milled guideways.
- Specially strengthened female threads with smooth, hard-wearing flanks for smooth running and good transmission of forces.
- Strong **arms** made of oil-hardened chrome vanadium steel, with profile-milled claws featuring a special gripping geometry for confined spaces, plus appropriate radii for shafts and axles.
- Heat-treated and specially coated **forcing screws/rams** with tribologically superior threads.
- Forcing screw heads with round striking crown to enable pounding the prestressed puller with a hammer to help loosen stubborn items.
- Load-harmonized, true-to-tolerance opening widths for slip-free engagement of the driving tool.
- CNC-fabricated precision fine-pitch threads for easy buildup of pulling force, even in the presence of high prestress and flank friction.
- Grooved end threads for avoiding damage to the female thread, if the full thread length is needed.
- Bearing-mounted, freely rotating center points for protecting the shaft against damage caused by application of the pulling force.

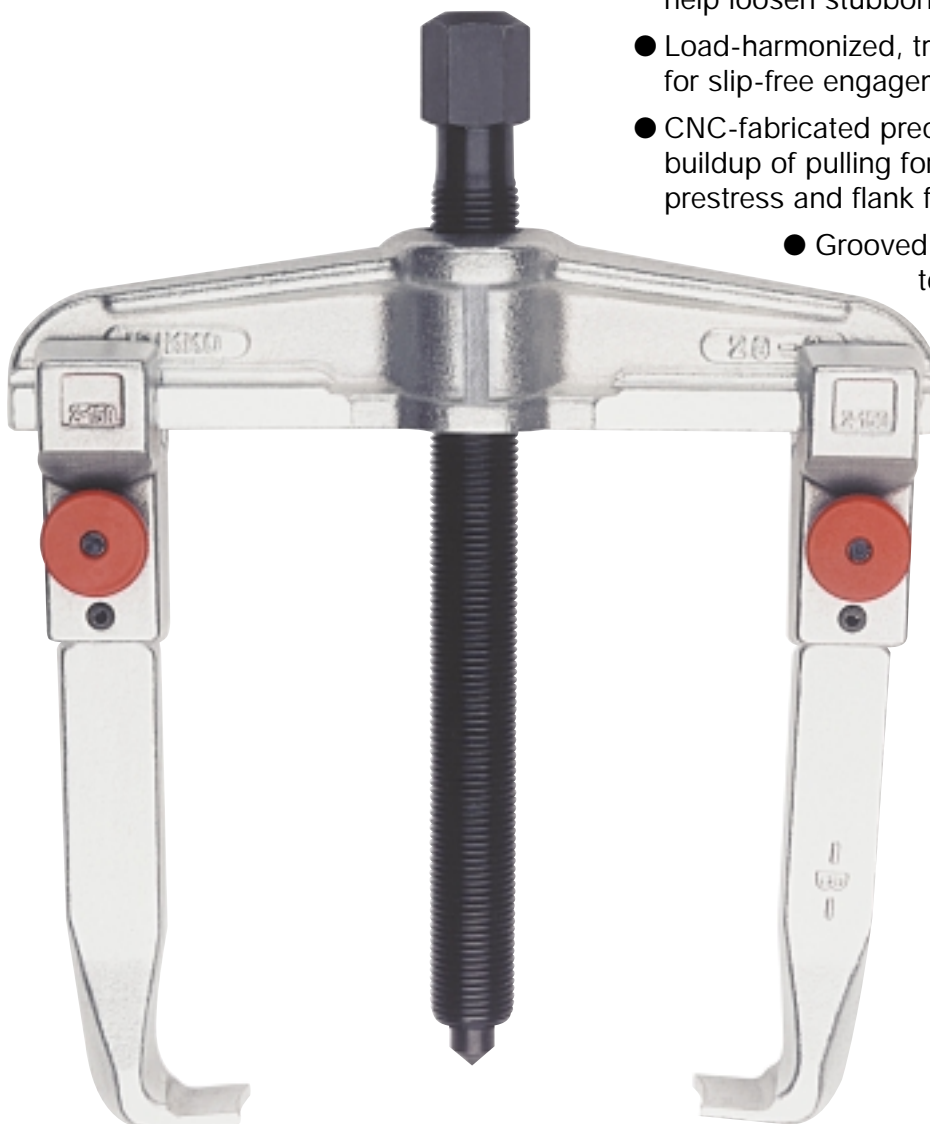

*In other words, KUKKO quality
- made in Germany -*



Sliding-arm Universal Pullers with Constantly Parallel Claws

1

This original KUKKO design has proven itself in decades of rough & tumble service all over the world.

Advantage: constantly parallel claws in any position, so that only the contact faces actually touch the part to be pulled.

Sturdy construction, high performance, handy shape, form-cut feet for use in confined spaces.

Universally applicable, with interchangeable claws for any required depth.





For outside and inside pulling.



Type 20 with standard-length claws





Two-arm universal pullers, type series 20

Mechanical pullers with standard-type, standard-length claws

Art. no.	mm		mm		kg			mm
20-1	90	3 ⁵ / ₈	100	4	1.10	009433	614 135	17
20-10	120	5	100	4	1.20	009921	614 135	17
20-2	160	6	150	6	2.80	009501	621 210	22
20-20	200	8	150	6	3.10	010088	621 210	22
20-3	250	10	200	8	7.00	009686	626 280	27
20-30	350	14	200	8	8.00	010163	626 280	27
20-4	520	21	200	8	13.40	009761	11-3-0	36
20-40	650	26	300	12	14.80	411861	11-3-0	36

Two-arm universal pullers, type series 20

Mechanical pullers with standard-type, off-length claws


Art. no.	mm		mm		kg			mm
20-1-2	90	3 ⁵ / ₈	200	8	1.60	466311	614 135	17
20-10-2	120	5	200	8	1.70	466496	614 135	17
20-2-3	160	6	300	12	3.60	466564	621 210	17
20-20-3	200	8	300	12	3.90	466649	621 210	17
20-3-3	250	10	300	12	8.10	466724		
20-3-4	250	10	400	16	9.20	467066		
20-3-5	250	10	500	20	10.20	467301	626 280	27
20-30-3	350	14	300	12	9.10	466809	626 280	27
20-30-4	350	14	400	16	10.20	467141		
20-30-5	350	14	500	20	11.20	467486		
20-4-3	520	21	300	12	14.50	466984		
20-4-4	520	21	400	16	15.60	467226		
20-4-5	520	21	500	20	16.60	467554	11-3-0	36
20-40-4	650	26	400	16	17.00	730641		
20-40-5	650	26	500	20	18.00	731976		



Type 20 with off-length claws

Standard-type claws



for pullers belonging to type series 20

Art. no.	mm		kg		Qty.	For puller nos.
1-90-P	100	4	0.56	001338	2	20-1, -10
2-150-P	150	6	1.20	002403	2	20-2, -20
3-200-P	200	8	3.10	003233	2	20-3, -30, -4, -40

These claws also fit three-arm pullers belonging to type series 30.

Extra-long claws

for pullers belonging to type series 20

Art. no.	mm		kg		Qty.	For puller nos.
1-190-P	200	8	1.00	001666	2	20-1, -10
1-250-P	250	10	1.25	001901	2	20-1, -10
2-300-P	300	12	2.15	002731	2	20-2, -20
3-300-P	300	12	4.40	003561	2	20-3, -30, -4, -40
3-400-P	400	16	5.30	003806	2	20-3, -30, -4, -40
3-500-P	500	20	8.50	004148	2	20-3, -30, -4, -40

These claws also fit three-arm pullers belonging to type series 30.






Sliding-arm Pullers with Constantly Parallel Claws



Two-arm universal pullers, type series 20-H

Sizes -3 and -30, with 10-ton hydraulic ram and standard-length claws





The nominal capacity of the hydraulic ram is reached at a torque of 30 Nm. (See page 26 for operation.)

Art. no.	mm		mm		kg		Hydr.	With extension	Capacity, t
20-3-H	250	10	200	8	7.70	786839	800	800-150	10
20-30-H	350	14	200	8	8.70	786914	800	800-150	10



Two-arm universal pullers, type series 20-AV

Size -4, size -40 and size 20-5 with adjustable-length claws




Art. no.	mm		mm		kg			mm
20-4-AV	520	21	300-500	12-20	18.70	706233	11-3-0	36
20-40-AV	650	26	300-500	12-20	20.00	732058	11-3-0	36
20-5	750	30	400-700	16-27	44.30	009846	637 600	41



Two-arm universal pullers, type series 20-H

Size 4, size 40 and size 20-5 with hydraulic ram and adjustable-length claws

High-compressive force is of major advantage for quick, effortless pulling of particularly tight-fitting items. (Operation as described on page 18.)

Art. no.	mm		mm		kg		Hydr.	Capacity t
20-4-H	520	21	300-500	12-20	26.30	227981	8-1-B	15
20-40-H	650	26	300-500	12-20	27.70	732218	8-1-B	15
20-5-H	750	30	400-700	16-28	49.80	228063	8-2-M	20




Hydraulic rams for pullers belonging to type series 20

High-compressive force is of major advantage for quick, effortless pulling of particularly tight-fitting items.

Simply replace the mechanical screw with a hydraulic ram.



The nominal capacity is reached at a torque of 45 Nm (8-1) or 30 Nm (8-2) and must not be exceeded.

(Operation as described on page 18.)

Art. no.	Suitable for nos.	Capacity t	Stroke mm	kg	
8-1-B	20-4 + 20-40	15	10	6.80	034596
8-2-M	20-5	20	10	10.00	034916

Adjustable-length puller arms

A single pair of these claws, with their adjustable lengths, suffices for various different reaches.

Art. no.	mm		kg		Qty.	For puller nos.
4-SP-P	300-500	12-20	8.50	004636	2	20-3, -30, -4, -40 adjustable
5-SP-P	400-700	16-28	20.40	004971	2	20-5 adjustable



Sliding-arm Pullers with Constantly Parallel Claws



Sales display and workshop stand

This practical stand facilitates the sales-counter presentation and/or orderly storage of your most frequently-used two-arm pullers. Two mounting holes in the back enable wall mounting, e.g., on a perforated wall panel.

Art. no.	incl. 1 ea. puller nos.					kg	Barcode
20-ST	20-1	20-10	20-2	20-20	20-3	16.50	010248

When ordering a complete stand and puller set no. 20-ST, you only pay for the pullers, the stand is free.



Two-arm universal pullers, type series 20 PLUS quick-adjusting

with knurled knobs for quick loosening and adjustment of puller arms without need of a wrench

Art. no.	mm		mm		kg	Barcode	mm	
20-1+	90	3 ⁵ / ₈	100	4	1.10	644771	614	135
20-10+	120	5	100	4	1.20	644856	614	135
20-2+	160	6	150	6	2.80	644931	621	210
20-20+	200	8	150	6	3.10	645013	621	210
20-3+	250	10	200	8	7.00	645198	626	280
20-30+	350	14	200	8	8.00	645273	626	280



Sales display and workshop stand

This practical stand facilitates the sales-counter presentation and/or orderly storage of your most frequently-used two-arm pullers. Two mounting holes in the back enable wall mounting, e.g., on a perforated wall panel.

Art. no.	incl. 1 ea. puller nos.					kg	Barcode
20-ST+	20-1+	20-10+	20-2+	20-20+	20-3+	16.50	668944

When ordering a complete stand and puller set no. 20-ST+, you only pay for the pullers, the stand is free.



Two-arm universal pullers, type series 20 PLUS-S quick-adjusting, with puller arms designed for confined spaces

with knurled knobs for quick loosening and adjustment of puller arms without need of a wrench

Art. no.	mm		mm		kg	Barcode	mm	
★ 20-1+S	90	3 ⁵ / ₈	100	4	1.10	756221	614	137
★ 20-10+S	120	5	100	4	1.20	756306	614	137
★ 20-2+S	160	6	150	6	2.80	756481	621	211
★ 20-20+S	200	8	150	6	3.10	756559	621	211
★ 20-3+S	250	10	200	8	7.00	756634	626	281
★ 20-30+S	350	14	200	8	8.00	756719	626	281

Sliding-arm Pullers with Constantly Parallel Claws

1



Two-arm universal pullers, type series 20-S

with slender puller arms for confined spaces, e.g., for pulling gear wheels, bearings, pinions and detents

Art. no.	mm		mm		kg			mm
20-1-S	90	3 ⁵ / ₈	100	4	1.00	757396	614 137	13
20-10-S	120	5	100	4	1.10	757471	614 137	13
20-2-S	160	6	150	6	2.70	727368	621 211	17
20-20-S	200	8	150	6	3.00	727443	621 211	17
20-3-S	250	10	200	8	6.90	727511	626 281	19
20-30-S	350	14	200	8	7.90	727696	626 281	19



Puller arms for confined spaces


Art. no.	mm		kg		Qty.	For puller nos.
1- 91-P	100	4	0.50	434716	2	20-1, -10
1-191-P	200	8	0.90	461286	2	20-1, -10
1-251-P	250	10	1.20	461446	2	20-1, -10
2-151-P	150	6	1.36	702921	2	20-2, -20
2-301-P	300	12	2.00	703188	2	20-2, -20
3-201-P	200	8	3.52	726521	2	20-3, -30
3-301-P	300	12	4.60	726781	2	20-3, -30
3-401-P	400	16	5.60	726941	2	20-3, -30
3-501-P	500	20	6.70	727108	2	20-3, -30



Two-arm universal pullers, type series 20-SP

with slender puller arms for confined spaces, e.g., for pulling gear wheels, bearings, pinions and detents from various depths

Art. no.	mm		mm		kg			mm
20-10SP	120	5	100/200/250	4/8/10	3.40	461514	614 137	13
20-20SP	200	8	150/300	6/12	5.10	701856	621 211	17
20-30SP	350	14	200/300/400	8/12/16	19.10	701931	626 281	19



Set of two- and three-arm pullers in a tool box

with puller arms for confined spaces, for several different depths

Art. no.	Contents: parts for puller nos.			kg			mm
K-2030S	20-10SP + 30-10SP	120	100/200/250	8.50	776021	614 137	13

Sliding-arm Pullers with Constantly Parallel Claws

1



„QUICKFIX“ two-arm quick-action pullers with reversible claws for inside and outside pulling

To mount the puller on the workpiece, simply slide the puller's pressure screw forward and lock it in the desired position. No more time-consuming in-turning and out-turning on long threads.

To lock the claws in position, hand-turn the easy-running knurled nut. No more wrench-tightening and -loosening of locking screws.



Two-arm universal pullers, type series 20 Q with quick-acting spindle assembly

Art. no.	mm		mm		kg			
20-10-Q	120	5	100	4	1.25	752346	612 165	13
20-20-Q	200	8	150	6	2.86	752421	615 240	17
20-3-Q	250	10	200	8	7.60	752599	622 320	19



Two-arm universal pullers, type series 20 QS with quick-acting spindle assembly and claws for use in confined spaces

Art. no.	mm		mm		kg			
20-10-QS	120	5	100	4	1.32	752674	612 165	13
20-20-QS	200	8	150	6	2.95	752759	615 240	17
20-3-QS	250	10	200	8	7.80	752834	622 320	19



Auxiliary hydraulic rams

Highly efficient. Minimal space requirement.

These rams make a first-class auxiliary tool for boosting the working force of mechanical pullers applied to particularly stubborn components.

(See also type nos. 9-1 and 9-2 on page 19).

Sliding-arm Pullers with Constantly Parallel Claws

1





UNIVERSAL puller set on perforated toolboard, 30-20-T

This set comprises basic equipment for two-arm and three-arm universal pullers, which are in constant use in any workshop.

This set of pullers comes on a 780 x 480-mm perforated wall panel for space-saving storage and ready availability. A wide variety of combinations permits the use of the right tool for the right job.

The set includes parts for all pullers illustrated below.

Art. no.	Description	 kg	
30-20-T	Universal puller set on perforated toolboard	17.50	281266

Outside pulling

2-arm



3-arm



spreads: 0-200 mm
max. reach: 300 mm

Inside pulling

2-arm



3-arm





for parts with bore diameters of 100 - 280 mm
max. reach: 300 mm

Separation pulling



for parts with bore diameters up to: 115 mm
max. depth: 300 mm

UNIVERSAL puller set in metal case

Art. no.	Description	 kg	
K-20-15	Pullers and separator set in metal case	16.30	367311

Set contents:

Art. no.	Description	→	∅	↓	↕
20-1	2-arm puller	90 mm	110 mm	100 mm	8
1-190-P	extra-long arms			200 mm	8
20-2	2-arm puller	160 mm	110 mm	150 mm	8
2-300-P	extra-long arms			300 mm	8
15-2	separator	∅ 115 mm			44
9-2	auxiliary hydraulic ram	150 kN		(15 Ton.)	19





Sliding-arm Pullers with Constantly Parallel Claws

2



Three-arm puller no. 30-3 with auxiliary hydraulic press no. 9-1








Three-arm universal pullers, type series 30

Universally applicable, with interchangeable arms for any required reach.

Serve both as outside and inside pullers.

Three-arm pullers, with their uniform load distribution, guarantee concentric pulling and a good hold on the part to be pulled.






Three-arm universal pullers, type series 30 with standard-type, standard-length arms

Art. no.	mm		mm		kg			
30-1	90	3 ⁵ / ₈	100	4	1.30	013393	614 135	17
30-10	120	5	100	4	1.60	013621	614 135	17
30-2	160	6	150	6	3.50	013478	621 210	22
30-20	200	8	150	6	3.90	013706	621 210	22
30-3	250	10	200	8	9.00	013546	626 280	27

For larger models, type series 11, see page 16.





Three-arm universal pullers, type series 30 with standard-type, off-length arms

Art. no.	mm		mm		kg			
30-1-2	90	3 ⁵ / ₈	200	8	2.10	730726	614 135	17
30-10-2	120	5	200	8	2.20	730801	614 135	17
30-2-3	160	6	300	12	4.70	730986	621 210	22
30-20-3	200	8	300	12	4.80	731068	621 210	22
30-3-3	250	10	300	12	10.30	731143	626 280	27
30-3-4	250	10	400	16	11.80	731228	626 280	27
30-3-5	250	10	500	20	11.30	731303	626 280	27





Standard-length arms for pullers belonging to types series 30

Art. no.	Qty.	mm		kg		For puller nos.
1-90-S	3	100	4	0.80	001413	30-1, -10
2-150-S	3	150	6	1.80	002571	30-2, -20
3-200-S	3	200	8	4.70	003318	30-3, 11-0, -1, -2

The above arms also fit two-arm pullers belonging to type series 20.



Off-length arms for pullers belonging to types series 30

Art. no.	Qty.	mm		kg		For puller nos.
1-190-S	3	200	8	1.20	001741	30-1, -10
1-250-S	3	250	10	1.65	002083	30-1, -10
2-300-S	3	300	12	3.20	002816	30-2, -20
3-300-S	3	300	12	6.50	003646	30-3, 11-0, -1, -2
3-400-S	3	400	16	7.70	003981	30-3, 11-0, -1, -2
3-500-S	3	500	20	11.70	004223	30-3, 11-0, -1, -2

The above arms also fit two-arm pullers belonging to type series 20.

Sliding-arm Pullers with Constantly Parallel Claws



Three-arm universal pullers, type series 30-S with puller arms for confined spaces

Art. no.	mm		mm		kg			mm
30-1-S	90	3 ⁵ / ₈	100	4	1.40	727771	614 137	13
30-10-S	120	5	100	4	1.50	728198	614 137	13
30-2-S	160	6	150	6	3.50	727856	621 211	17
30-20-S	200	8	150	6	3.70	727931	621 211	17
30-3-S	250	10	200	8	9.40	728013	626 281	19

Three-arm universal pullers, type series 30-SP Sets with puller arms for confined spaces, with several different depths

Art. no.	mm		mm		kg			mm
30-10-SP	120	5	100/200/250	4/8/10	4.80	463839	614 137	13
30-20-SP	200	8	150/300	6/12	6.80	728273	621 211	17
30-3-SP	250	10	200/300/400	8/12/16	24.70	728358	626 281	19

Puller arms for confined spaces

Art. no.	mm		kg		Qty.	For puller nos.
1- 91-S	100	4	0.75	497834	3	30-1, -10
1-191-S	200	8	1.35	497919	3	30-1, -10
1-251-S	250	10	1.80	498091	3	30-1, -10
2-151-S	150	6	2.04	728686	3	30-2, -20
2-301-S	300	12	3.06	728769	3	30-2, -20
3-201-S	200	8	5.28	728846	3	30-3, 11-0
3-301-S	300	12	6.90	728921	3	30-3, 11-0
3-401-S	400	16	8.40	729003	3	30-3, 11-0, -1
3-501-S	500	20	9.96	729188	3	30-3, 11-0, -2



Three-arm universal pullers, type series 30 PLUS quick-adjusting

with knurled knobs for quick loosening and adjustment of puller arms without need of a wrench

Art. no.	mm		mm		kg			mm
30-1+	90	3 ⁵ / ₈	100	4	1.40	731488	614 135	17
30-10+	120	5	100	4	1.50	731556	614 135	17
30-2+	160	6	150	6	3.60	731631	621 210	22
30-20+	200	8	150	6	3.70	731716	621 210	22
30-3+	250	10	200	8	8.80	731891	626 280	27



Three-arm universal pullers, type series 30 PLUS-S quick-adjusting, with puller arms for confined spaces

Art. no.	mm		mm		kg			mm
30-1+S	90	3 ⁵ / ₈	100	4	1.10	756894	614 137	13
30-10+S	120	5	100	4	1.20	756979	614 137	13
30-2+S	160	6	150	6	2.80	757051	621 211	17
30-20+S	200	8	150	6	3.10	757136	621 211	17
30-3+S	250	10	200	8	7.00	757211	626 281	19



Sliding-arm Pullers with Constantly Parallel Claws

Heavy-duty three-arm universal pullers, type series 11

The tried & proven industrial puller for removing heavy pulleys, gears and similar components.

Extra powerful drop-forged models

Strong, single-piece puller head section for heavy loads

Arms for all applications

Mechanical and hydraulic operation

Numerous combination options thanks to interchangeable arms from model to model.

Useful for outside and inside pulling operations

Parallel adjustment ensures that the item to be pulled always rests fully on the claw faces for a gentle pulling effect.



Three-arm universal pullers, type series 11-A

Mechanical pullers with standard-type, standard-length arms

Art. no.	mm		mm		kg			mm
11-0-A	375	15	200	8	15.30	005886	11-3-0	36
11-1-A	520	21	200	8	21.00	075421	11-3-1	41
11-2-A	650	26	200	8	23.00	006203	11-3-1	41



Three-arm universal pullers, type series 11-A

Mechanical pullers with standard-type, off-length arms

Art. no.	mm		mm		kg			mm
11-0-A3	375	15	300	12	17.10	729263	11-3-0	36
11-0-A4	375	15	400	16	18.60	729348	11-3-0	36
11-0-A5	375	15	500	20	20.10	729423	11-3-0	36
11-1-A3	520	21	300	12	22.50	729591	11-3-1	41
11-1-A4	520	21	400	16	24.00	729676	11-3-1	41
11-1-A5	520	21	500	20	25.50	729751	11-3-1	41
11-2-A3	650	26	300	12	24.90	706158	11-3-1	41
11-2-A4	650	26	400	16	26.00	729836	11-3-1	41
11-2-A5	650	26	500	20	27.60	729911	11-3-1	41



Three-arm universal pullers, type series 11-AV

Mechanical pullers with adjustable-length arms

Art. no.	mm		mm		kg			mm
11-0-AV	375	15	300-500	12-20	23.10	730078	11-3-0	36
11-1-AV	520	21	300-500	12-20	28.50	730153	11-3-1	41
11-2-AV	650	26	300-500	12-20	30.50	730238	11-3-1	41

Sliding-arm Pullers with Constantly Parallel Claws



Three-arm universal pullers, type series 11-B

Hydraulic pullers with standard-type, standard-length arms

Art. no.	mm		mm		kg		Hydr.	Capacit t
11-0-B	375	15	200	8	17.80	075346	8-1-B	15
11-1-B	520	21	200	8	26.50	006128	8-2-K	20
11-2-B	650	26	200	8	29.00	006388	8-2-K	20
11-3-B	650	26	300	12	30.70	706073	8-2-K	20

Three-arm universal pullers, type series 11-BV

Hydraulic pullers with adjustable-length arms

Art. no.	mm		mm		kg		Hydr.	Capacity t
11-0-BV	375	15	300-500	12-20	26,70	730313	8-1-B	15
11-1-BV	520	21	300-500	12-20	33,10	730498	8-2-K	20
11-2-BV	650	26	300-500	12-20	34,90	730566	8-2-K	20

Hydraulic screws for pullers belonging to type series 11

The great advantage of these powerful screws is their ability to remove stubborn parts quickly and easily.

They are easy to fit in place of the mechanical screws.

The max. permissible hydraulic load is reached at a torque of 45 Nm (8-1) or 30 Nm (8-2). Do not exceed those values.

Art. no.	Capacity, t	Stroke, mm	kg		Suitable for nos.
8-1-B	15	10	6.80	034596	11-0
8-2-K	20	10	9.00	034831	11-1 + 11-2

(For method of operation, see page 18.)

Arms for pullers belonging to type series 11

(suitable for all sizes)



Art. no.	Qty.	mm		kg		For puller nos.
3-200-S	3	200	8	4.70	003318	11-0, -1, -2, -3, 30-3
3-300-S	3	300	12	6.50	003646	11-0, -1, -2, -3, 30-3
3-400-S	3	400	16	7.70	003981	11-0, -1, -2, -3, 30-3
3-500-S	3	500	20	11.70	004223	11-0, -1, -2, -3, 30-3

The above arms also fit two-arm pullers belonging to type series 20.

Adjustable-length arms for pullers belonging to type series 11

Claws adjust to various lengths. Therefore only one pair is required for various depths.




Art. no.	Qty.	mm		kg		For puller nos.
4-SP-S	3	300-500	12-20	4.70	004711	11-0, -1, -2, -3, 30-3

The above arms also fit two-arm pullers belonging to type series 20.

Hydraulic Screws/Rams for KUKKO Pullers

2

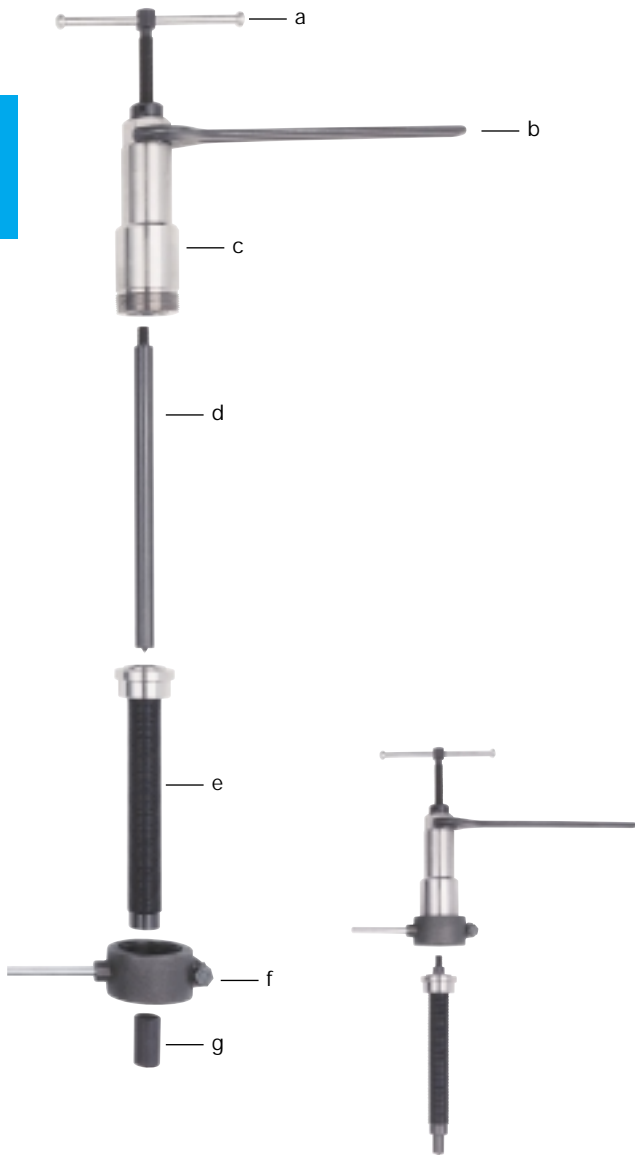

15 and 20-ton hydraulic screws

The great advantage of these powerful hydraulic screws is their ability to quickly and easily remove tight-fitting parts.

Through the use of interchangeable spindle assemblies, one hydraulic forcing screw will fit numerous different KUKKO pullers (please refer to opposite page).

Assembly procedure:

Screw the thrust bolt (d) into the taphole in the hydraulic ram (c). Slide the hollow spindle (e) over the thrust bolt, and insert it into the opening at the bottom of the hydraulic ram.

Turn the breechlock nut (f) onto the threaded end of the ram, and tighten the side screw.

Push the thrust pad (g) over the end of the thrust bolt (d).

Operation:


Use the spanner (b) to turn the screw into the puller head until the thrust pad is securely seated on the end of the shaft. Now, turn the T-handle (a) to start the hydraulic action.

Turning must be done by hand. The handle is sized to ensure that the maximum permissible torque can not be exceeded.

Back off the T-handle (a) after each operation.

Complete hydraulic screws

to be used with KUKKO pullers

Art. no.	Capacity t	kg		Suitable for puller nos.
8-1-B	15	6.8	034596	11-0, 18-4, 20-4, 20-40
8-1-F	15	7.7	034671	46 + 47, 209-2
8-2-K	20	9.9	034831	11-1 + 11-2
8-2-M	20	10.0	034916	18-5 + 20-5

Caution:

Perfect alignment of the hydraulic puller with the part to be withdrawn is very important. Misalignment will create extra bending forces and damage the tool or cause accidents. Before operating under pressure, part and puller should be wrapped securely in a KUKKO® protective blanket (page 92). Forces exerted must be controlled carefully during the pulling action. The maximum permissible load will be reached at a torque of 45 Nm (8-1) or 30 Nm (8-2) and must not be exceeded.



Pulling tool type 18-4 with hydraulic screw type 8-1-B and separator type 15-4



Puller type 11-2-B with hydraulic screw type 8-1-K and special-purpose puller arms type 4-SP-S



Puller type 20-5 with hydraulic screw type 8-2-M and special-purpose puller arms type 5-SP-P

Hydraulic Screws/Rams for KUKKO Pullers



Hydraulic ram types 8-1 and 8-2 for hydraulic screws

Art. no.	Capacity, t	Stroke, mm	Maximum permissible load		kg	Barcode
			Pulling force	Torque		
8-1	15	10	150 KN	45 Nm	4.60	034428
8-2	20	10	200 KN	30 Nm	6.20	034756
8-1-ERS	Spare parts set for		8-1	0,70		243721
8-1-REP	Factory overhaul and reconditioning		8-1			237478
8-2-ERS	Spare parts set for		8-2		1.00	243806
8-2-REP	Factory overhaul and reconditioning		8-2			237546

(For operation, see page 18.)

Hollow spindle assemblies suitable for ram type 8-1 (complete with thrust bolt, as illustrated at left)

Art. no.	Thread diameter and length	Suitable for puller nos.	kg		Barcode
			Pulling force	Torque	
8-B*	R 1" x 250 mm	11-0, 18-4, 20-4, 20-40	2.00		034183
8-F**	R 1" x 350 mm	46 + 47, 209-2	2.90		034268

* with thrust pad 35 mm

** with thrust pad 135 mm

Hollow spindle assemblies suitable for ram type 8-2 (complete with thrust bolt, as illustrated at left)

Art. no.	Thread diameter and length	Suitable for puller nos.	kg		Barcode
			Pulling force	Torque	
8-K*	R 1 1/8" x 250 mm	11-1 + 11-2	2.60		035098
8-M**	R 1 1/8" x 350 mm	18-5 + 20-5	3.90		035173

* with thrust pad 45 mm

** with thrust pad 135 mm

Auxiliary hydraulic rams, type series 9

Highly efficient. Minimal space requirement.

These rams make a first-class auxiliary tool for boosting the working force of mechanical pullers applied to particularly stubborn components. To avoid overloading, such rams should only be used with size-3 pullers or larger.


Art. no.	Dia. mm	Height mm	Stroke mm	Max. permissible load		kg	Barcode
				Pulling force	Torque		
9-1	37	62	10	100 KN	35 Nm	0.85	005053
9-2	50	80	15	150 KN	50 Nm	1.60	005138
9-1-ERS	Spare parts set for			9-1		0.30	243981
9-1-REP	Factory overhaul and reconditioning			9-1			237621
9-2-ERS	Spare parts set for			9-2		0.50	244063
9-2-REP	Factory overhaul and reconditioning			9-2			237706

Operation:

Position the ram, with its side pressure screw (b) fully backed off, between the shaft and the puller screw (a), and secure by tightening the latter. Initiate hydraulic action by tightening the side pressure screw (b). If the part fails to come off with the first stroke of the ram, continue to work the puller screw (a) or proceed as follows:

- back off the side pressure screw (b);
- retighten the puller screw (a);
- retighten the side pressure screw (b).

Important: After use, back off screw (b) to make the built-in restoring spring return the thrust bolt to its initial position.

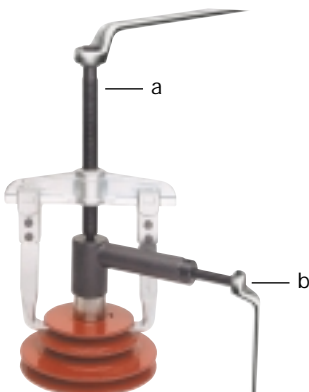


Note:

The nominal capacity is reached at a torque of 35 Nm (9-1) or 50 Nm (9-2), respectively, and must not - in order to prevent accidents and damage to the tool - be exceeded.



Compact High-performance Hydraulic Rams, Type series „800“

2

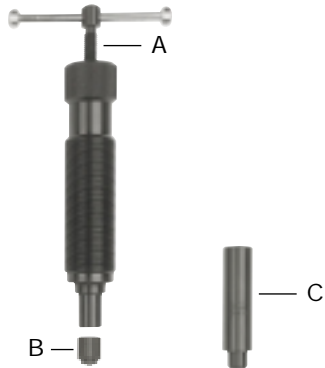

With their favorably diminutive overall dimensions, these compact, high-performance rams have proven themselves many times over as power producers and problem solvers in the toolmaking branch and numerous other areas.

The original low-maintenance KUKKO design featuring a slip-free hydraulic system devoid of trapped air guarantees dependable operation and high performance.

Operation:

Prior to use, back off the upper spindle (A) so that the pull-back spring can return the piston to its starting position.

Then, slip on the accompanying pressure pad (B), screw the hydraulic ram into the puller's tapped bore, and tighten it down.

If the spindle is too short, remove the pressure pad, attach one or more spindle extensions (C), as necessary, and mount the pressure pad (B) at the end of the assembly.

To apply hydraulic force, tighten the upper spindle (A = forcing screw), being careful not to exceed the load stamped on the body of the ram (max. to ~ kN).

To prevent accidents or damage to the tool, take care to ensure that all components involved are designed to handle the ram's compressive force rating.


Since work involving high levels of force always also involves the possibility that parts might fly apart, take appropriate preventive measures, e.g., securely wrap the workpiece and ram in a KUKKO protective blanket (page 92), and always wear the personal protective equipment prescribed by the applicable industrial safety regulations.



Hydraulic rams, 100 kN and 150 kN (10 and 15 ton)

These rams have 1 1/2" male Whitworth threads (as do most tools of this type now available on the market; see pages 26-31 for pulling tools to use with series „800“ rams).

Art. no.	Max. capacity achieved at:	Stroke -	G (Ø 38 mm)	L (retracted)	kg	Barcode
800	100 kN=40 Nm	10 mm	W 1 1/2"-16	~ 200 mm	1.40	034343
801	150 kN=70 Nm	10 mm	W 1 1/2"-16	~ 200 mm	1.50	784446
800-REP	Factory overhaul and reconditioning, no. 800					
801-REP	Factory overhaul and reconditioning, no. 801					

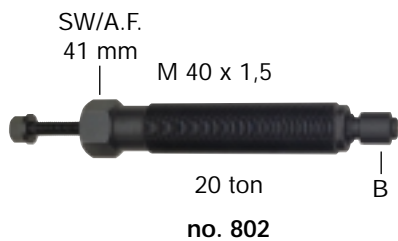

Hydraulic rams, 200 kN (20 ton)


This ram has M 40 x 1.5/DIN 13 male threads. The nose of the spindle has AF 41 mm spanner flats to enable application of substantial initial tension. Prior to applying initial tension, turn back the hydraulic pressure screw all the way.

Then, apply the hydraulic force by tightening it with a 19 mm hexagon wrench.

Art. no.	Max. capacity achieved at:	Stroke -	G (Ø 40 mm)	L (retracted)	kg	Barcode
802	200 kN=100 Nm	10 mm	M 40 x 1,5	~ 200 mm	1.90	784514
802-REP	Factory overhaul and reconditioning, no. 802					

Ram extensions

Art. no.	Extends by:	For use with ram nos.:	kg	Barcode
800-050	50 mm	800, 801, 802	0.15	031113
800-100	100 mm	800, 801, 802	0.35	031298
800-150	150 mm	800, 801, 802	0.55	031373

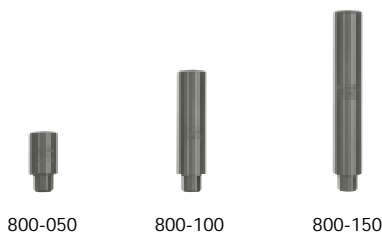

Heavy-duty Pullers for Workshop, Assembly Work and Construction Site

Heavy-duty pullers, type series 46/47


Tried & proven many thousand times over, these original KUKKO pullers are used for pulling off spoke wheels, gears, pulleys, etc.

Extra robust design

Strong, drop-forged head for accommodating two or three arms.

Interchangeability of component parts from puller to puller permits any number of combinations.

Mechanical or hydraulic operation



Heavy-duty two-arm puller, type series 46-A with mechanical forcing screw

Art. no.	mm	mm	mm	mm	kg	4021176	11-3-0	mm
46-1-A	300	12	300	12	9.40	016936	11-3-0	36
46-2-A	500	20	450	18	11.70	017193	46-3-2	36



Heavy-duty two-arm puller, type series 47-A with mechanical forcing screw

Art. no.	mm	mm	mm	mm	kg	4021176	11-3-0	mm
47-1-A	300	12	300	12	11.40	017681	11-3-0	36
47-2-A	500	20	450	18	14.40	017841	46-3-2	36

For hydraulic operation, replace pressure screw no. 11-3-0 or no. 46-3-2 with a no. 8-1-F hydraulic ram (see page 18)



Heavy-duty two-arm puller, type series 46-B with hydraulic screw

Art. no.	mm	mm	mm	mm	kg	4021176	Hydr.	Capacity t
46-1-B	300	12	300	12	14.60	017018	8-1-F	15
46-2-B	500	20	450	18	16.00	017278	8-1-F	15



Heavy-duty three-arm puller, type series 47-B with hydraulic screw


Art. no.	mm	mm	mm	mm	kg	4021176	Hydr.	Capacity t
47-1-B	300	12	300	12	16.70	017766	8-1-F	15
47-2-B	500	20	450	18	18.80	017926	8-1-F	15



Puller arms for type series 46 and 47

Art. no.	Part	1	kg	4021176	Suitable for nos.
46-300	puller arm, reach: 300 mm	1	2.00	017438	46-1 + 47-1
46-450	puller arm, reach: 450 mm	1	2.70	170461	46-2 + 47-2


Pullers with Self-locking Claws

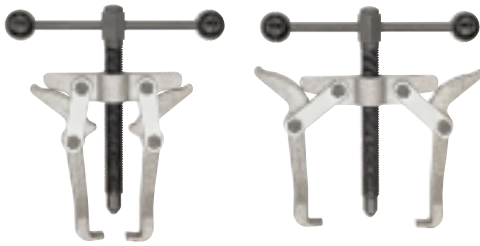

Quick-adjusting two-arm pullers, type series 28

When the puller is mounted, a cam system locks the claws in place by forcing the arms tightly up against the part to be pulled. The claws cannot possibly slip off or yield in any direction.

The greater the pulling force, the better the grip.

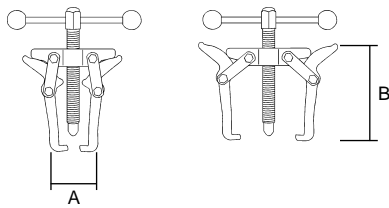

Quick-adjusting two-arm pullers, type series 28

Art. no.	A	B	Capacity, t	kg	4021176	620	162	24
28-1	50-125 mm	135-100 mm	6	1.7	850929	620	162	24
28-2	50-150 mm	150-125 mm	6	1.8	851001	620	172	24
28-3	50-200 mm	200-175 mm	8	2.2	851186	620	230	24
28-4	50-250 mm	225-250 mm	8	2.3	851261	620	250	24

Three-arm Pullers with Preselectable Spread

Three-arm pullers, type series 12

Sturdy pullers with high pulling force and excellent gripping effect for removing particularly stubborn ball bearings, gears, pulleys, etc.

Use the key to adjust the requisite spread and firmly grip the item to be pulled. This effectively prevents the arms from slipping off or otherwise yielding.



Three-arm pullers for outside pulling

Art. no.	mm	mm	mm	mm	Capacity, t	kg	4021176	614	135	17
12-1	100	4	100	4	6	1.20	006616	614	135	17
12-2	150	6	125	5	8	1.70	006791	618	175	19
12-3	200	8	165	6 1/2	10	3.40	006876	623	230	24



Three-arm pullers for outside and inside pulling

Use the key to adjust the requisite spread of the smooth-running, symmetrically gripping arms via the lever system, which forces the arms tightly up against the part to be pulled.

Art. no.	outside pulling mm	inside pulling mm	Capacity, t	kg	4021176	626	355	27		
12-4	20-250	225	225-325	50	10	11.00	850509	626	355	27
12-5	30-350	275	300-425	50	10	13.30	850684	626	480	27
12-6	50-450	300	350-550	50	15	32.50	850769	633	600	36
12-7	75-650	350	550-725	50	15	41.00	850844	633	600	36

Pullers with Self-centering and Self-aligning Arms



This original, tried & proven KUKKO design features self-centering, quick-action clamping and automatic grip adjustment.

In the presence of force from the spindle, the arms clasp the part to be pulled with automatically increasing intensity. The puller arms are made of drop-forged special steel.

Pullers belonging to type series 43 for small electric motors, battery terminals, small ball bearings, etc.

These handy, space-saving models with slender claws are especially suitable for automotive electrical equipment, electrical workshops, pneumatic repairs and similar applications.

Two-arm pullers, type series 43

Art. no.	mm	mm	mm	mm	kg	4021176	
43-1	60	2 ³ / ₈	50	2	0.22	015458	609 087
43-2	70	2 ³ / ₄	70	2 ³ / ₄	0.24	015861	609 087
43-3	80	3 ¹ / ₄	80	3 ¹ / ₄	0.26	015946	609 105

Three-arm pullers, type series 43

Art. no.	mm	mm	mm	mm	kg	4021176	
43-11	60	2 ³ / ₈	50	2	0.26	015526	609 087
43-12	70	2 ³ / ₄	70	2 ³ / ₄	0.30	015601	609 087
43-13	80	3 ¹ / ₄	80	3 ¹ / ₄	0.34	015786	609 105

Two-arm pullers, type series 44

Sturdy models for removing tightly seated gears, bearings, pulleys, wheels, etc.

Art. no.	mm	mm	mm	mm	kg	4021176		mm
44-1	100	4	100	4	0.50	016028	612 130	14
44-2	120	4 ³ / ₄	120	4 ³ / ₄	0.80	016103	614 160	17
44-3	160	6 ³ / ₈	160	6 ³ / ₈	1.80	016288	618 210	19
44-4	250	10	200	8	3.20	016363	623 260	24
44-5	300	12	250	10	3.60	815133	623 325	24
44-6	375	15	275	11	4.00	815218	623 360	24

(Hydraulic models, see type 844 on page 26)

Three-arm pullers, type series 45

Sturdy models for removing tightly seated gears, bearings, pulleys, wheels, etc.

Art. no.	mm	mm	mm	mm	kg	4021176		mm
45-1	100	4	100	4	0.60	016448	612 130	14
45-2	120	4 ³ / ₄	120	4 ³ / ₄	1.10	016516	614 160	17
45-3	160	6 ³ / ₈	160	6 ³ / ₈	2.30	016691	618 210	19
45-4	250	10	200	8	4.00	016776	623 260	24
45-5	300	12	250	10	4.60	815393	623 325	24
45-6	375	15	275	11	5.00	815478	623 360	24
45-7	600	24	350	14	6.30	821646	623 450	24

(Hydraulic models, see type 845 on page 26)



Pullers with Self-centering, Self-aligning Arms



KUKKO autogrip

The convenient two-arm and three-arm puller concept with automatic self-clamping, self-locking and self-centering features, all incorporated in an extra-compact design. Thanks to integrated self-alignment with spring mechanism, the gripping power increases in proportion to the pulling power.

The elastic effect in combination with a lean design enables pulling operations in hard-to-access places.

Two-arm KUKKO-autogrip pullers, type series 482

Art. no.	mm		mm		kg	
482-1	60	2 ³ / ₈	40	1 ¹ / ₂	0.20	479779
482-2	85	3 ¹ / ₄	90	3 ¹ / ₂	0.58	479854
482-3	150	6	150	6	0.68	479939
482-4	200	8	200	8	1.38	480096
482-5	250	10	250	10	1.76	480171

Three-arm KUKKO-autogrip pullers, type series 483

Art. no.	mm		mm		kg	
483-2	85	3 ¹ / ₄	90	3 ¹ / ₂	0.36	480331
483-3	150	6	150	6	0.90	480416
483-4	200	8	200	8	1.82	480584
483-5	250	10	250	10	2.20	480669

Two-arm KUKKO-autogrip pullers in display package

Art. no.	Contents: puller nos.	kg	
482-DP	482-1, 482-2, 482-3	1.42	745836

Pullers with Claw Feet

Two-arm pullers, type series 14

with extra-slimmer claw feet for coping with tight spaces when pulling gears, bearings and similar components.

Individually adjustable spread and reach thanks to self-locking retaining pins (that do not fall out in the middle of the job!). These specially designed pullers are self-gripping and easy to use. A variety of arm attachment options yield an extremely broad range of spread. The shearlike nature of the arm mounts presses the claws „undetachably“ up against the part to be pulled.




Art. no.	mm		mm		kg	
14-1	6-100	1/4-4	85	3 ³ / ₈	0.50	455421
14-2	10-140	3/8-5 ¹ / ₂	125	4 ⁵ / ₈	1.00	248443
14-3	15-140	3/8-5 ¹ / ₂	160	6 ¹ / ₄	1.20	248511

Pullers with extremely narrow claws


Art. no.	mm		mm		kg	
14-01*	6-100	1/4-4	85	3 ³ / ₈	0.50	459559
14-03**	5-140	3/8-5 ¹ / ₂	160	6 ¹ / ₄	1.20	460111

* 14-01: 15 kN (1.5 t) = 25 Nm max.
 ** 14-03: 30 kN (3.0 t) = 55 Nm max.




mm	14-01	14-03
A	11	12
B	8,5	11
C	4,5	5
D	3,5	3,5

Pullers with Side Clamps



Indispensable tools for removing flush-mounted parts. When the side clamp is tightened, it forces the claws in under the part to be pulled, thus prying it away before the actual pulling process begins.




204-0

Bearing puller, type series 204-0

This tool is very useful for removing flush-mounted ball bearings, bearing races, etc. in, say, light-engineering, electrical and pneumatic maintenance shops.


Art. no.	mm	mm	mm	kg	4021178	610 094
204-0	50	2	70	2 ³ / ₄	0.65	028168
204-02	90	3 ¹ / ₂	100	4	2.00	339516



Pullers, type series 204

For use in pulling ball bearings, gears, pinions, steering arms and similar parts. The clamp forces the arms tightly up against the part to be removed.

Art. no.	mm	mm	mm	kg	4021178	618 105	mm
204-1	80	3 ¹ / ₈	90	3 ⁵ / ₈	1.30	028243	19
204-2	100	4	100	4	2.00	028328	22
204-3	150	6	140	5 ¹ / ₂	3.00	028403	24

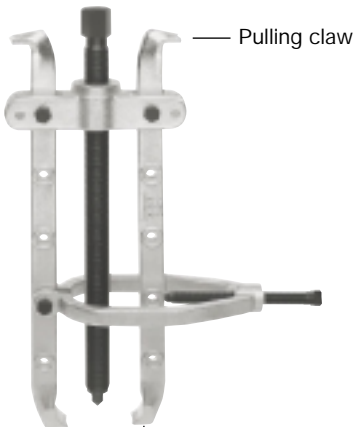

Separator pullers, type series 210

A very versatile tool for cases in which ordinary pullers will not do the job.

The arms' space-saving design facilitates work to be accomplished in confined spaces.

Art. no.	mm	mm	mm	kg	4021178	621 210	mm
210-1	95	3 ³ / ₄	170	6 ³ / ₄	2.60	030383	22
210-2	135	4 ³ / ₈	270	10 ⁵ / ₈	4.30	030468	24
210-3	150	6	325	12 ⁷ / ₈	4.80	030536	24




Special benefits:

The claws on the puller arms have conical blades on one side to facilitate loosening of such closely seated parts as axle bearings, ball bearing races and pinions. The side clamp forces the claws in behind such parts to enable their removal.

The arms are reversible and have normal pulling claws on the other side.

Light-engineering and Instrument-building Pullers

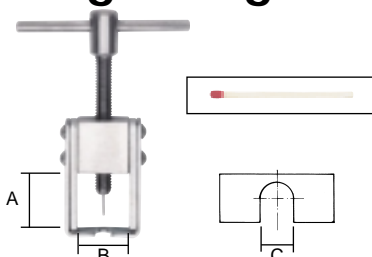


Small-part puller - speedometer cable puller

for pulling pointers and similarly small parts off of speedometer cables, pressure gauge cables and modeling assemblies.

Art. no.	A mm	B mm	C mm	g	4021178	860746
T-014-0	20	18	5	80		



Pullers with 10-ton Hydraulic Ram Modular Type series „800“

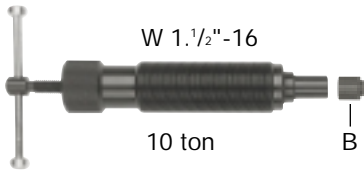

Operation:

Prior to use, back off the upper spindle (A) so that the piston can return to its starting position. Then, place the accompanying pressure pad (B) on the thrust bolt, and screw the hydraulic ram into the puller's head such that the ram fits up snugly on the shaft. Actuation of the upper spindle (A) increases the pressure and pulls the part off.

Attach one or more spindle extensions to the thrust bolt if the length of the hydraulic ram is insufficient. Finally, mount the pressure pad (B) on the spindle extension.

This model series constitutes a modular system, i.e., all pullers use the same hydraulic ram and consist of easily replaceable, multifariously combinable, individual parts.

These models are available as complete hydraulic pullers as well as in the form of practical sets of components for putting together a multitude of different puller tools.

Hydraulic ram, type series 800

(with pressure pad, without ram extensions)

Hydraulic rams belonging to type series 800 achieve high pulling force with only minimal manual exertion.


No other pulling tools are required.

The axially oriented jacking piston does not rotate inside of the hydraulic ram during the pulling process. Thus, the ram can not „wander“.

The ram extensions enable quick accommodation of different working conditions.



Art. no.	Capacity, t	Stroke, mm	kg	Barcode	Threads
800	10	10 ³ / ₈	1.40	034343	W 1.1/2"-16
800-ERS	Spare parts set for no. 800		0.30	244483	
800-REP	Factory overhaul and reconditioning		-	238123	
800-050	Ram extension, 50 mm (2")		0.15	031113	
800-100	Ram extension, 100 mm (4")		0.35	031298	
800-150	Ram extension, 150 mm (6")		0.55	031373	

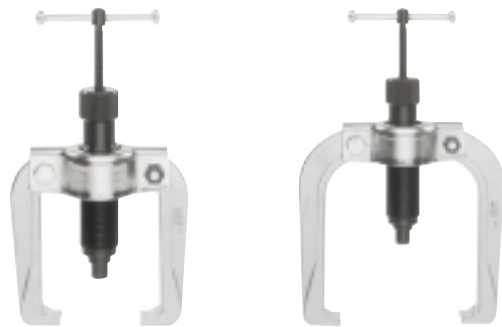


Two-arm hydraulic pullers, type series 844

Complete with hydraulic ram and ram extension

Art. no.	mm	mm	mm	mm	kg	Barcode	Ram extension no.
844-1-B	50-100	2-4	100	4	3.00	031601	800 050
844-2-B	75-150	3-6	150	6	3.50	031946	800 100
844-3-B	75-150	3-6	250	10	4.40	032448	800 150
844-4-B	100-200	4-8	200	8	4.10	076091	800 150
844-5-B	130-250	5-10	250	10	4.70	032776	800 150

Replace the hydraulic ram with a mechanical forcing screw type 844-626 for mechanical operation of these pullers (cf. opposite page)

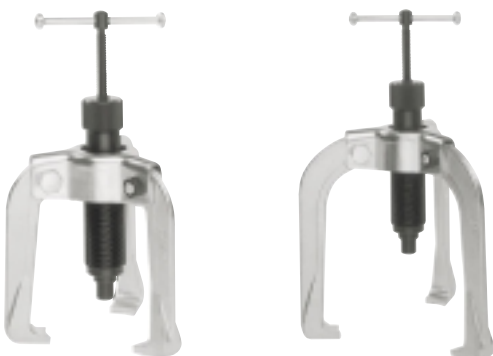


Three-arm hydraulic pullers, type series 845

Complete with hydraulic ram and ram extension

Art. no.	mm	mm	mm	mm	kg	Barcode	Ram extension no.
845-1-B	50-100	2-4	100	4	3.50	033218	800 050
845-2-B	75-150	3-6	150	6	4.20	033438	800 100
845-3-B	75-150	3-6	250	10	5.60	033681	800 150
845-4-B	100-200	4-8	200	8	5.00	033841	800 150
845-5-B	130-250	5-10	250	10	6.00	034008	800 150

Replace the hydraulic ram with a mechanical forcing screw type 844-626 for mechanical operation of these pullers (cf. opposite page)

Pullers with 10-ton Hydraulic Ram Modular Type series „800“



Hydraulic „4-puller“ set „ABZ 100-H“

(10 tons)

This set contains 4 combinable pullers - 2 ea. three-arm pullers and 2 ea. two-arm pullers with spreads of 50-150 mm and depths up to 150 mm.

Art. no.	mm		..	mm		..	kg	
845-150	50-150	2-6	150	6	10.20		717871	



Hydraulic „4-puller“ set in display pack

(10 tons)

This set contains 4 combinable pullers - 2 ea. three-arm pullers and 2 ea. two-arm pullers - with spreads of 50-150 mm and depths up to 150 mm.

Art. no.	mm		..	mm		..	kg	
P-84445	50-150	2-6	150	6	7.00		281181	




Hydraulic „6-puller“ set „ABZ 150-H“

(10 tons)

This set contains 6 combinable pullers - 3 ea. three-arm pullers and 3 ea. two-arm pullers - with spreads of 75-250 mm and depths up to 250 mm.

Art. no.	mm		..	mm		..	kg	
845-250	75-250	3-10	250	10	15.60		717956	

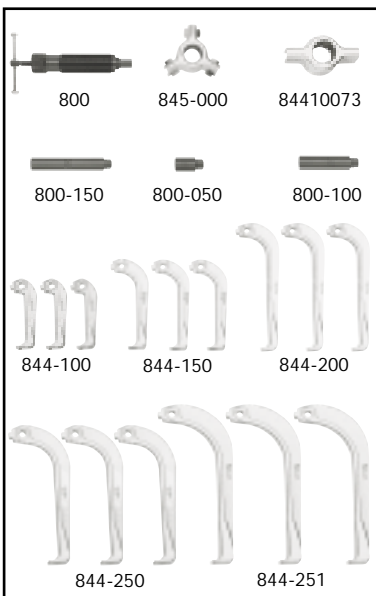

Hydraulic „10-puller“ set

(10 tons)

This set contains 10 combinable pullers - 5 ea. three-arm pullers and 5 ea. two-arm pullers - with spreads of 50-250 mm and depths up to 250 mm.

Art. no.	kg		
845-851	in metal case	20.00	172854

Mechanical operation

By replacing the type-800 hydraulic ram with this mechanical pressure screw, the pullers of this modular type series can be converted for mechanical operation.



Art. no.	kg		mm
844-626	1.28	032851	24

4






Pulling Tools with 10-ton Hydraulic Ram Modular Type series „800“




Hydraulic pulling tool type 818-0

Complete with hydraulic ram and ram extension

Art. no.	mm		mm		kg		Ram extension no.
818-0	240	9 ¹ / ₂	280	11	7.60	173196	800 150


This pulling tool is the basic element of a system that includes numerous accessories for extensive versatility!

with separator with internal extractor with pulling arms

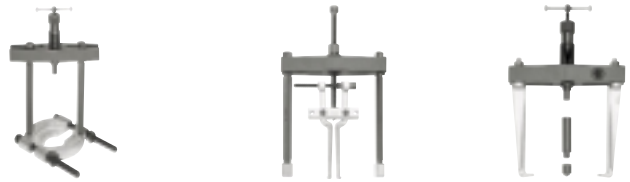


Pulling bolt extensions for type 818-0

Screwed into the ends of the pulling bolts, each pair extends the reach of the puller by 250 mm (10").

Art. no.	Length, mm	mm	kg		Qty.	Suitable for no.
818-250	250	10	0.80	173356	1 ea.	818-0


Separators for use with type 818-0

The pulling bolts of the hydraulic pulling tool type 818-0 screw into the separator.

Art. no.	A mm	mm	B mm	mm	kg	
Y-215-2	22-115	7/8-4 ⁵ / ₈	115	4 ⁵ / ₈	2.50	172106
Y-215-3	25-155	1 -6 ¹ / ₄	155	6	5.20	039546
Y-215-4	30-200	1 ¹ / ₄ -8	200	8	12.00	385629

Internal extractor, for use with type 818-0

Complete with pulling screw, spindle nut, thrust washer and „plain hole“ beam converter.

Art. no.	A mm	mm	B mm	mm	kg	
818-021	30-180	1 ¹ / ₄ -7	140	5 ¹ / ₂	2.70	757969

Puller arms, complete with nut and washer




These puller arms convert pulling tool 818-0 into a two-arm hydraulic puller.


Art. no.	Length, mm	mm	kg		Qty.	Suitable for no.
820-225	225	10	0.80	173356	1 ea.	818-0 + 820-0

Since this multifarious and practical combination is needed in most cases, it is also available as a complete puller device (see below).

Hydraulic two-arm puller type 820-0

Complete with hydraulic ram and ram extension

Art. no.	mm		mm		kg	
820-0	225	8 ⁷ / ₈	225	8 ⁷ / ₈	7.00	173684




818-021



Pulling Tools with 10-ton Hydraulic Ram Modular Type series „800“

Hydraulic bearing puller sets

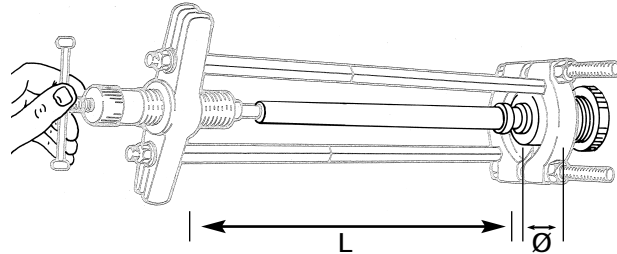

Hydraulic bearing puller set (10 tons)

„ABZ 200-H“

for bearings with diameters of: **22-115 mm**
and depths up to: **530 mm**

Art. no.	Ø mm	L mm	kg	Barcode
818-100	22-115 7/8-4 5/8	530 21	15.70	717611



Hydraulic bearing puller set (10 tons)

„ABZ 250-H“

for bearings with diameters of: **25-155 mm**
and depths up to: **780 mm**

Art. no.	Ø mm	L mm	kg	Barcode
818-150	25-155 1-6 1/4	780 31	18.50	717796

(not illustrated)


Hydraulic bearing puller and extractor set (10 tons) in metal case

- | | | |
|--------------------|-----------------------------|------------------|
| 1) for separating | bearings with diameters of: | 25-155 mm |
| | and depths up to: | 780 mm |
| 2) for pulling out | bearings with bores up to: | 30-180 mm |
| 3) for pulling off | parts with spreads up to: | 225 mm |
| | and depths up to: | 225 mm |

Art. no.	Ø	L	kg	Barcode
818-215	22-155 mm 1 - 6 1/4"	780 mm 31"	23.00	173271

This set contains the components for:

- Pulling tool** (type 818-0)
Spread: up to 240 mm (9 1/2")
- With pulling bolt extension** for reaches up to 780 mm (31")
- Separator** (type Y-215-2)
Capacity: 22-115 mm (7/8" - 4 5/8")
- Separator** (type Y-215-3)
Capacity: 25-155 mm (1" - 6 1/4")
- Internal extractor** type 800-221 for bores 30 - 180 mm (1 1/4" - 7")
- Two-arm puller** type 820-0
Spread: up to 225 mm (8 7/8")
Reach: up to 225 mm (8 7/8")

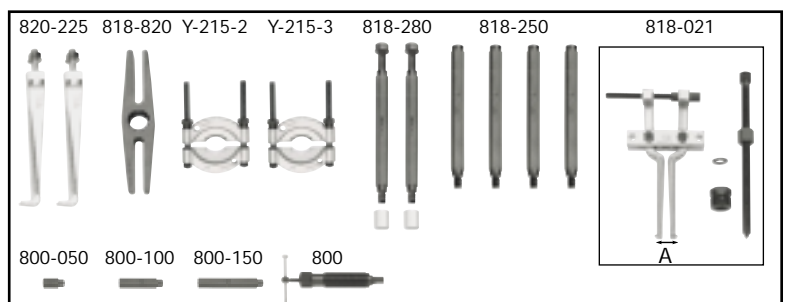

4



Pullers with 10-ton Hydraulic Ram Modular Type series „800“

Hydraulic universal puller sets
in metal cases

Hydraulic universal puller set (10 tons)

Art. no.	Ø	L				
845-855	25-155 mm 1 - 6 1/4"	780 mm 31"	50-250 mm 2 - 10"	250 mm 10"	39.00 kg	172939

4


This set contains the components for:

- Pulling tool** (type 818-0)
Spread: up to 240 mm (9 1/2")
with **pulling bolt extensions** for reaches up to 780 mm (31")
- Separator** (type Y-215-3)
Capacity: 25-155 mm (1"-6 1/4")

and 10 puller models

- | | |
|-----------------------|-----------------------|
| 2-arm versions | 3-arm versions |
| Type 844-1-B | 845-1-B |
| Type 844-2-B | 845-2-B |
| Type 844-3-B | 845-3-B |
| Type 844-4-B | 845-4-B |
| Type 844-5-B | 845-5-B |

Spread: 50-250 mm (2"-10")
Reach: up to 250 mm (10")

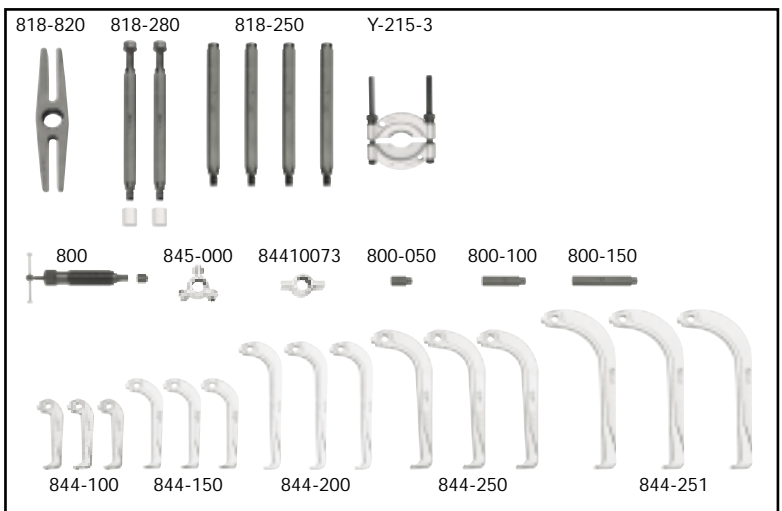

Hydraulic universal puller and extractor set (10 tons)

Art. no.	Ø	L			A		
845-858	25-155 mm 1 - 6 1/4"	780 mm 31"	50-250 mm 2 - 10"	250 mm 10"	30-180 mm 1 1/4 - 7"	42.00 kg	173011


This set contains the components for:

- Pulling tool** (type 818-0)
Spread: up to 240 mm (9 1/2")
with **pulling bolt extensions** for reaches up to 780 mm (31")
- Separator** (type Y-215-3)
Capacity: 25-155 mm (1"-6 1/4")
- Internal extractor** type 818-021 for bores (1 1/4"-7")

and 10 puller models


- | | |
|-----------------------|-----------------------|
| 2-arm versions | 3-arm versions |
| Type 844-1-B | 845-1-B |
| Type 844-2-B | 845-2-B |
| Type 844-3-B | 845-3-B |
| Type 844-4-B | 845-4-B |
| Type 844-5-B | 845-5-B |

Spread: 50-250 mm (2"-10")
Reach: up to 250 mm (10")

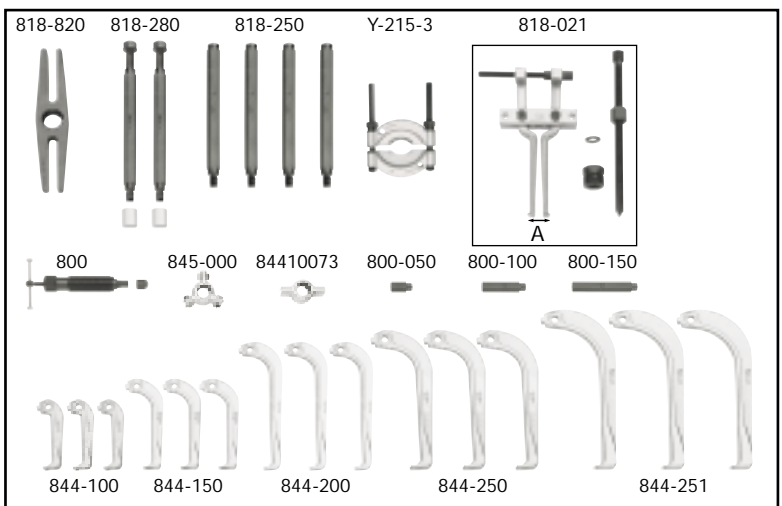





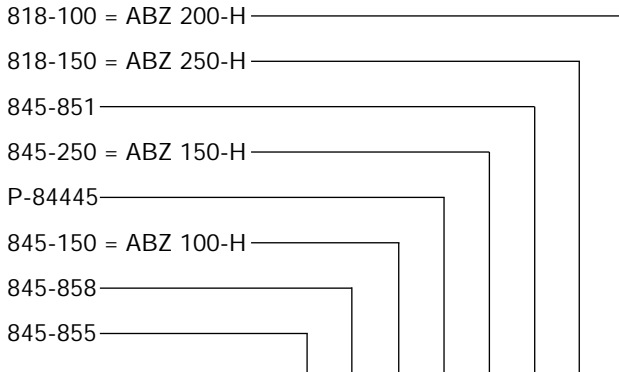
















Pullers with Hydraulic Ram, Module-type: Series „800“

Set composition



Parts List:

	1	1	1	1	1	1	1	1	Art. no.	kg	Description
	1	1	1	1	1	1	1	1	800	1.40	Hydraulic ram - 10 tons - with pressure pad (800 017) for all pullers 818-0, 820-0, 844 and 845 (all sizes)
	1	1	1	1	1	1	1	1	800-050	0.15	Ram extension 50 mm (2")
	1	1	1	1	1	1	1	1	800-100	0.40	Ram extension 100 mm (4")
	1	1			1	1	1	1	800-150	0.60	Ram extension 150 mm (6")
	3	3	3	3		3			844-100	0.50	Puller arm, reach: ↓ 100 mm (4") for pullers 844-1-B and 845-1-B
	3	3	3	3		3			844-150	0.60	Puller arm, reach: ↓ 150 mm (6") for pullers 844-2-B and 845-2-B
	3	3			3	3			844-200	0.80	Puller arm, reach: ↓ 200 mm (8") for pullers 844-4-B and 845-4-B
	3	3			3	3			844-250	1.00	Puller arm, reach: ↓ 250 mm (10") spread: 150 mm (6") for pullers 844-3-B and 845-3-B
	3	3			3	3			844-251	1.00	Puller arm, reach: ↓ 250 mm (10") spread: 250 mm (10") for pullers 844-5-B and 845-5-B
	1	1	1	1	1	1			84410073	0.38	Twin head for pullers 844 (all sizes), without grooved center nut, cap screws and nuts
	1	1	1	1	1	1			845-000	0.90	Triple head for pullers 845 (all sizes) with grooved center nut, cap screws and nuts
									844-020	0.30	Grooved center nut (spare) for heads 844-000 and 845-000
	1	1				1	1		818-820	2.60	Head for pullers 818-0 and 820-0
	2	2				2	2		818-280	1.00	Pulling bolt for device 818-0 with nut, washer, and end protector (Y-218-09)
	4	4				4	2		818-250	0.80	Pulling bolt extension, reach: 250 mm (10")
									820-225	0.80	Puller arm, reach: ↓ 225 mm (9") for puller 820-0 with nut and washer
								1	Y-215-2	2.50	Bearing separator, capacity: ↔ 22-115 mm (7/8 - 4 5/8") suitable for pulling tool 818-0
	1	1					1		Y-215-3	5.20	Bearing separator, capacity: ↔ 25-155 mm (1 - 6 1/4") suitable for pulling tool 818-0
									Y-215-4	12.00	Bearing separator, capacity: ↔ 30-200 mm (1 1/4 - 8") suitable for pulling tool 818-0
		1							818-021	2.70	Internal extractor, capacity: 30-180 mm (1 1/4 - 7") for use with pulling tool 818-0 complete with pulling screw, nut, washer and „plain hole“ beam converter
									844-626	1.20	Mechanical spindle with pressure pad (800 017) for converting the hydraulic puller into a mechanical puller. (Suitable for all series-800 pullers.)

Swivel-Arm Pullers



Sturdy universal models for use on pulleys, gears, ball bearings and similar parts.


Their unique self-locking system ensures that „the harder the pull, the tighter the grip“.

Basic models:

Two-arm pullers for use in confined spaces and in combination with separators.

Three-arm pullers for ensuring even distribution of load, a secure hold on the part to be withdrawn, and concentric pulling action.

Combination pullers are two-in-one versions that permit both **two-arm** and **three-arm pulling** jobs simply by shifting one of the arms.



Kombi



Two-arm pullers, type series 201

with reversible double-end jaws



Art. no.	mm	mm	mm	kg	4021176	mm	mm
201-0	100	4	75	3	0.50	026423	612 080 14
201-1	150	6	85	3 ¹ / ₄	0.90	026591	614 135 17
201-2	220	8	130	5 ¹ / ₄	2.40	026676	621 210 22
201-3	300	12	260	10	4.70	026751	626 280 27
201-4	380	15	300	12	5.20	026836	626 280 27

Three-arm pullers, type series 202


with reversible double-end jaws



Art. no.	mm	mm	mm	kg	4021176	mm	mm
202-0	100	4	75	3	0.70	027093	612 080 14
202-1	150	6	85	3 ¹ / ₄	1.10	027178	614 135 17
202-2	220	8	130	5 ¹ / ₄	3.00	027253	621 210 22
202-3	300	12	260	10	6.40	027338	626 280 27
202-4	380	15	300	12	7.10	027413	626 280 27

Three-arm combination pullers, type series 203

Also for use as **two-arm** and **three-arm pullers**, with reversible double-end jaws



Art. no.	mm	mm	mm	kg	4021176	mm	mm
203-0	120	5	75	3	0.60	027666	612 080 14
203-1	180	7	80	3 ¹ / ₄	1.20	027741	614 135 17
203-2	280	11	130	5 ¹ / ₄	3.10	027826	621 210 22
203-3	350	14	260	10	6.50	027901	626 280 27
203-4	400	16	300	12	7.20	028083	626 280 27

Special-purpose pullers for fan wheels, type series 201/202-S

These extra-slender puller arms reach through two or three slots to seize the hub of the fan.

Art. no.	Version	mm	mm	mm	kg	4021176	mm	mm
201-S	two-arm	200	4	200	4	1.10	026911	614 240 17
202-S	three-arm	200	4	200	4	1.50	027581	614 240 17

Swivel-Arm Pullers

Mini-models, type series 41-0 and 42-0

Extra-strong design with hexagonal spindle heads
(13 mm / 1/2" across flats)



Art. no.	Version	mm	mm	mm	kg	4021176	610 070
41-0	2-arm	60	2 ³ / ₈	40	1 ⁵ / ₈	0.20	362859
42-0	3-arm	60	2 ³ / ₈	40	1 ⁵ / ₈	0.25	362026

Two-arm and three-arm mini-pullers

Small, handy models for automotive electrical systems, battery terminals, light engineering, electrical service shops, etc.



Art. no.	Version	mm	mm	mm	kg	4021176	609 087
41-1	2-arm	65	2 ⁹ / ₁₆	65	2 ⁹ / ₁₆	0.20	015038
41-2	2-arm	80	3 ¹ / ₄	80	3 ¹ / ₄	0.25	015113
42-1	3-arm	65	2 ⁹ / ₁₆	65	2 ⁹ / ₁₆	0.30	015298
42-2	3-arm	80	3 ¹ / ₄	80	3 ¹ / ₄	0.35	015373

Two- and three-arm pullers, type series 41 and 42

with standard-length claws



Art. no.	Version	mm	mm	mm	kg	4021176	612 150	mm
41-3	2-arm	90	3 ¹ / ₂	120	5	0.70	787829	14
41-4	2-arm	130	5	160	6 ³ / ₈	1.80	836268	17
41-5	2-arm	180	7 ¹ / ₈	200	10	3.70	836343	22
42-3	3-arm	90	3 ¹ / ₂	120	5	1.00	787904	14
42-4	3-arm	130	5	160	6 ³ / ₈	2.70	836428	17
42-5	3-arm	180	7 ¹ / ₈	200	10	5.10	836596	22

Two-arm pullers, type series 205

With adjustable-length arms



Art. no.	mm	mm	mm	kg	4021176	612 110	mm
205-00	100	4	100	4	0.50	028571	14
205-01	150	6	150	6	1.00	028656	17
205-02	250	10	220	8 ³ / ₄	2.50	028731	22
205-1	300	12	280	11	5.20	028816	27
205-2	400	16	400	16	6.40	028991	27
205-3	500	20	540	21	9.00	029073	27

Three-arm pullers, type series 206


With adjustable-length arms



Art. no.	mm	mm	mm	kg	4021176	612 110	mm
206-00	100	4	100	4	0.60	029158	14
206-01	150	6	150	6	1.40	029233	17
206-02	250	10	220	8 ³ / ₄	3.30	029318	22
206-1	300	12	280	11	6.80	029493	27
206-2	400	16	400	16	8.20	029561	27
206-3	500	20	540	21	12.60	029646	27

Three-arm combination pullers, type series 207

For two-arm and three-arm pulling, with adjustable-length arms



Art. no.	mm	mm	mm	kg	4021176	612 110	mm
207-00	120	5	100	4	0.60	029721	14
207-01	200	8	150	6	1.50	029806	17
207-02	300	12	220	8 ³ / ₄	3.30	029981	22
207-1	400	16	280	11	7.00	030048	27
207-2	450	18	400	16	8.90	030123	27
207-3	550	22	540	21	12.90	030208	27



Swivel-Arm Puller Sets



Two-arm and three-arm puller set

This set includes parts for **4 different** mechanical **pullers** with reversible double-end jaws for a **wide variety of outside and inside pulling jobs**.

Art. no.	Description	kg	4021176
K-203	Set in metal case	8.5	288784

Examples:

Range of application



Spread:	180 mm	280 mm	180 mm	280 mm
Reach:	80 mm	130 mm	80 mm	130 mm

5



Two-arm and three-arm puller set

This set includes parts for **4 different** mechanical **pullers** with long, adjustable-length arms for extra-deep reaches and added versatility.

Art. no.	Description	kg	4021176
P-207	Set in display pack	5.2	280849

Examples:

Range of application



Spread:	200 mm	300 mm	200 mm	300 mm
Reach:	150 mm	220 mm	150 mm	220 mm

Two-arm and three-arm puller + separator set

This set includes parts for **4 different** mechanical **pullers** with reversible double-end jaws and a pair of separators for added versatility.

Art. no.	Description	kg	4021176
K-20315	Set in metal case	12.0	280504

Examples:

Range of application



Spread:	180 mm	280 mm	180 mm	280 mm
Reach:	80 mm	130 mm	80 mm	130 mm

Separation pulling




Max. part diameter:		75 mm		115 mm
Reach:		80 mm		130 mm



Swivel-Arm Puller Sets

Two-arm and three-arm puller + separator set

This set includes parts for **4 different** mechanical **pullers** with **long arms** for **extra-deep reach**, in addition to **2 separators** for added versatility.

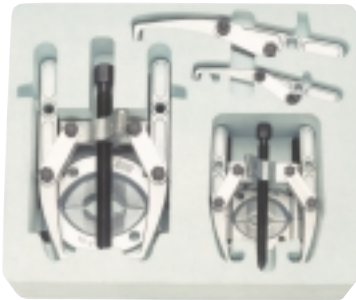

Art. no.	Description	kg	Barcode
P-20715	Set in display pack	8.6	281006

Examples:

Range of application

Spread:
Reach:



200 mm
150 mm



300 mm
220 mm



200 mm
150 mm



300 mm
220 mm

Separation pulling



75 mm
150 mm



115 mm
220 mm

Max. part diameter:
Reach:



Pullers with Slide Hammer - Percussion-type Pullers

Puller with slide hammer, type 220

For pulling gears, ball bearings, bearing races, seal rings and other parts.

Art. no.	External spread with 3 broad arms mm	"	Internal spread with 2 slender arms mm	"	kg	4021176	030611
220	0-200	8	40-92	1 ⁵ / ₈ -3 ⁵ / ₈	7.0		

Pulling is effected by attaching the puller and executing several sharp blows with the slide hammer:

The puller consists of:

- 1) Slide screw shaft with bar handle
- 2) Slide hammer
- 3) Adjusting cone
- 4) Three-part puller head
- 5) Two-part puller head
- 6) Set of 3 broad arms for external pulling
- 7) Set of 2 slender arms for internal pulling
- 8) Distance plate
- 9) Screw center
- 10) Spring
- 11) Pulling plate attachment
- 12) Set of 3 tie bolts for the arms

Operation:

Outside pulling

Attach the pulling claws to the inner holes in the pulling head. The rotating radial spring acting on the top ends of the claws generates spring tension that automatically pushes the claws up against the part to be pulled. Tighten the adjusting cone to give the claws an „und detachable“ grip. Remove the part either by means of sharp blows of the slide hammer or by tightening the slide screw shaft.

Pulling parts with tapped bores

Insert standard-type screws of a size to match that of the tapped bores through the holes in the pulling plate attachment. Place the pulling claws behind the attachment, and remove the part by means of sharp blows of the slide hammer.


Two- or three-arm inside pulling

Attach the pulling arms with their claws showing outward to the outer holes in the pulling head. Slip the accompanying distance plate onto the bottom end of the slide screw shaft on the puller head. Insert the claws into the bore of the part to be pulled, and tighten the slide screw shaft as far as necessary to effect a good grip of the claws in the collar of the part to be pulled. Effect pulling by means of sharp blows of the slide hammer.

Puller no. 220-02 and no. 220-03

These self-gripping pullers with cone-driven spread adjuster „und detachably“ grip the part to be pulled.

Art. no.	Version	mm	"	mm	"	kg	4021176	619 251
220-02	2-arm	200	8	165	6 ¹ / ₂	2.10	778919	619 251
220-03	3-arm	200	8	165	6 ¹ / ₂	2.60	779091	619 251

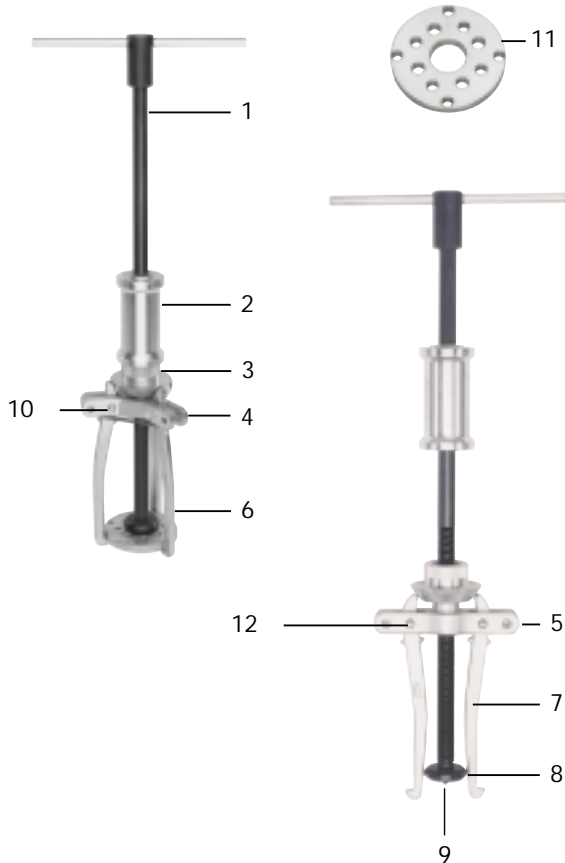



Pullers with Slide Hammer - Percussion-type Pullers



Set of percussion pullers with slide hammer, no. 220-T

This set contains an array of pulling tools for universal application (cf. below). It comes clearly arranged on a space-saving, wall-mounting perforated toolboard (780 x 480 mm).

Art. no.	Description	 kg	
220-T	Set of pullers with slide hammer	17.5	778759

The set includes:

- 1) slide-hammer unit with slide screw shaft, bar handle and slide hammer
- 2) two-arm head with claws
- 3) three-arm head with claws, radial spring and adjusting cone
- 4) mechanical pressure screw
- 5) pulling plate attachment for pulling parts with tapped bores
- 6) distance plate for use on inside pulling jobs
- 7) three-arm + two-arm combination puller
- 8) perforated toolboard, 780 x 480 mm

for the following pulling tools:

- A) two-arm puller with slide hammer
spread: to 200 mm
depth: to 165 mm
- B) two-arm puller with pressure screw
spread: to 200 mm
depth: to 165 mm
- C) three-arm puller with slide hammer
spread: to 200 mm
depth: to 165 mm
- D) three-arm puller with pressure screw
spread: to 200 mm
depth: to 165 mm
- E) pullers for parts with tapped bores

Operation A - B - C - D:

Attach the pulling claws to the inner holes in the pulling head. The rotating radial spring acting on the top ends of the claws generates spring tension that automatically pushes the claws up against the part to be pulled. Tighten the adjusting cone to give the claws an „und detachable“ grip. Remove the part either by means of sharp blows of the slide hammer or by tightening the slide screw shaft.

Operation E:


Insert standard-type screws of a size to match that of the tapped bores through the holes in the pulling plate attachment. Place the pulling claws behind the attachment.

Operation F - G:

Two or three pulling arms can be mounted on the head, as necessary. The pulling arms have several mounting holes to accommodate different depths. To pull the part, tighten the mechanical pressure screw. For inside pulling, mount the pulling arms on the head with their claws showing outward.


Operation H - I:

Attach the pulling arms with their claws showing outward to the outer holes in the pulling head. Slip the accompanying distance plate onto the bottom end of the slide screw shaft on the puller head. Insert the claws into the bore of the part to be pulled, and tighten the slide screw shaft as far as necessary to effect a good grip of the claws in the collar of the part to be pulled.

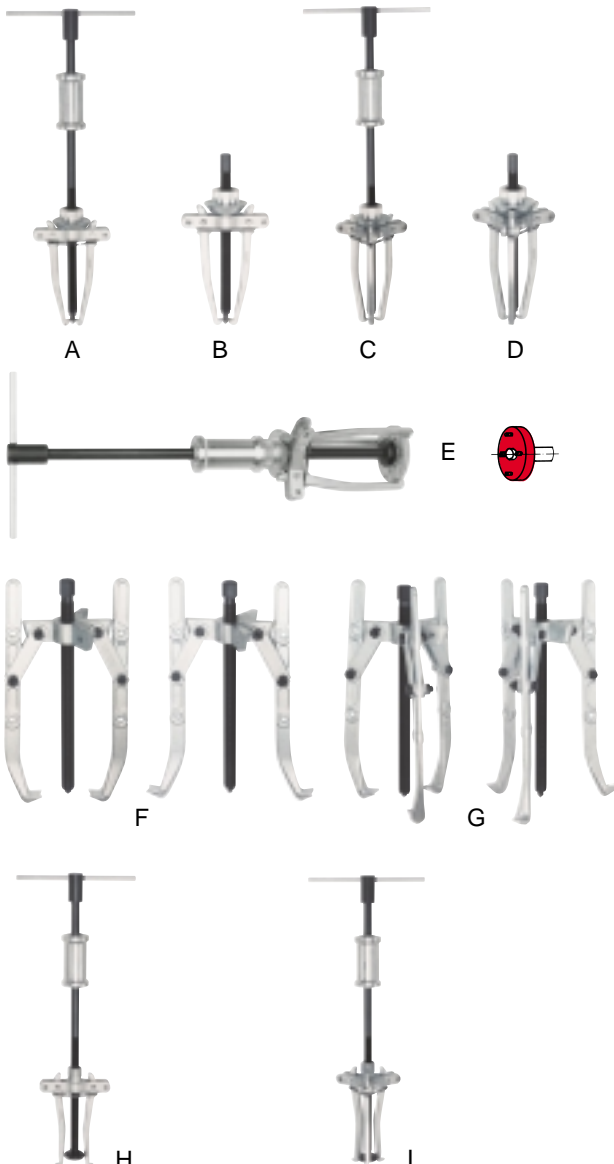



The Puller Specialist Since 1919

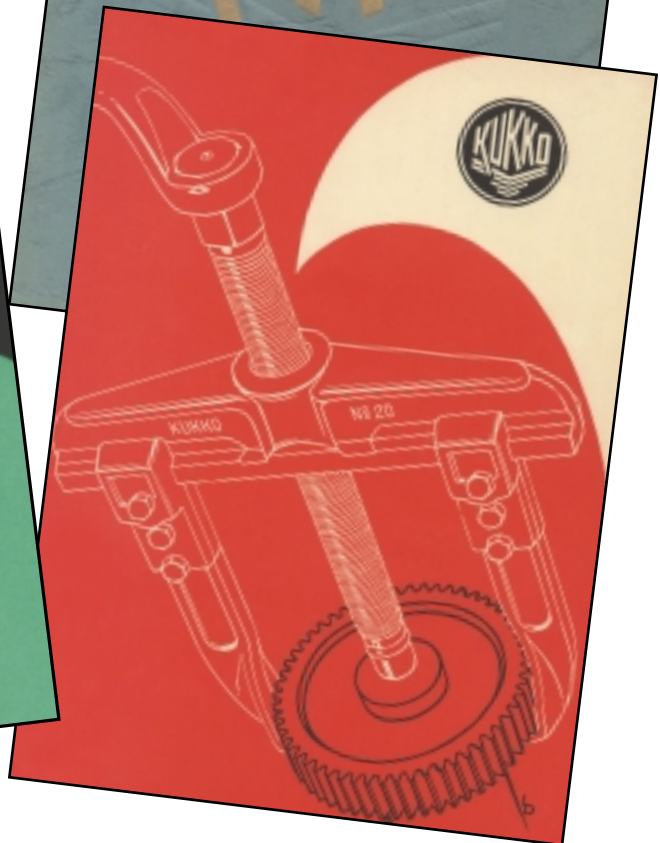

KUKKO - the Original



Universal Bearing Extractor

Comprising an internal extractor and a counterstay.

Internal extractor with two extracting jaws and an extractor screw for forcing them apart.

Forged counterstay with powerful screw, torque nut and T-handle.

Made of drop-forged special steel.


The perfect tool for use in **extracting ball bearings, ball bearing races, sleeves and bushes.**

Securely holds and extracts - quickly and easily - even bearings that fit closely up against the back of the housing.

Top-notch performance and durability guaranteed.



Universal Bearing Extractors, Type Series 21 and 22

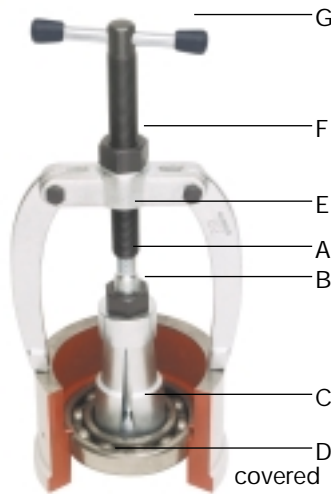

This complete puller consists of an internal extractor type 21 and a counterstay type 22.



Removable reduction collar

(For screw plugs for pulling parts with tapholes, see page 44.)

The perfect tool for **pulling out ball bearings, ball bearing races, sleeves and bushes.**
Securely grips and extracts quickly and easily, even bearings that fit closely up to the back of the housing.
Top-notch performance and durability guaranteed.

Operation:

Push the type-21 internal extractor into the bore of the bearing, Tighten nut **B** to spread the jaws **C** and force the lips **D** in behind the rounded race edge. Place the type-22 counterstay on the bearing housing, and tighten the screw **E** down on the extractor screw **A**. Now, hold the handle **G** firmly and tighten the nut **F** to extract the bearing smoothly and evenly.
Keep tightening the extractor nut **B** during the pulling process.

Internal extractors, type series 21-0 - 21-9

Art. no.	mm		"	kg		
21-0	5- 8	$13/64-5/16$		0.07	010408	22-1
21-00	6- 10	$1/4-25/64$		0.07	010576	
21-01	8- 12	$5/16-1/2$		0.08	010651	
21-02	10- 14	$13/32-9/16$		0.08	010736	
21-1	12- 16	$31/64-5/8$		0.16	010811	
21-2	14- 19	$35/64-3/4$		0.18	010996	
21-3	18- 23	$23/32-29/32$		0.20	011153	
21-4	20- 30	$7/8-17/61$		0.22	011238	
21-5	28- 40	$17/64-129/64$		0.36	011498	
21-6	36- 46	$127/64-113/16$		0.68	011566	
21-7	45- 58	$125/32-219/64$		1.20	011641	22-2
21-8	56- 70	$213/64-23/4$		1.44	011726	
21-9	70-100	$23/4-315/16$		2.56	011986	22-3

Counterstays, type series 22-1 - 22-3

For internal extractors 21-0 - 21-9

Art. no.	*Connection to internal extractor	kg		Capacity (max.) t
22-1	21-0 - 21-02 with reduction collar	0.6	012228	3
	21-1 - 21-5 without reduction collar			
22-2	21-3 - 21-5 with reduction collar	1.6	012303	4
	21-6 - 21-8 without reduction collar			
22-3	by connecting nut	3.9	012488	5
	21-6 - 21-8 with reduction collar			
	21-9 without reduction collar			

* Counterstays 22-1, 22-2 and 22-3 are each supplied with an attached reduction collar. Type 22-3 is supplied with an attached connecting nut and a reduction collar screwed into the nut. Use according to table.

Slide Hammer Units

For internal extractors and needle bearing extractors belonging to type series 21.

These units are useful for jobs in which space restrictions forbid the use of a standard counterstay. Attach the unit to the extractor and bump the hammer vigorously against the top ridge to extract the bearing.



Art. no.	kg		
22-0	0.40	012143	21-0 - 21-2
22-01	2.50	248108	21-3 - 21-8; 21-40 - 21-46
22-09	2.80	879579	21-9
22-089	2.60	451799	21-89
22-090	6.00	451959	21-90

Extracting Tools



Internal extractors, 16-21, 21-89 and 21-90

For large ball bearings, outer ball races and similar parts

These tools are provided with spreaders to be mounted on the lower screw end in a given position to obtain the required jaw spread.

Art. no.	For bores of mm	kg		
16-21	60-155 2 ³ / ₈ -6 ¹ / ₈	3.00	251559	16-22
21-89	56-110 2 ¹ / ₄ -4 ³ / ₈	2.30	011801	22-4
21-90*	100-200 4-7 ¹ / ₈	6.30	012068	22-5

* Size 21-90 has two bores for jaw attachment:
use inner holes for bores of 100 - 150 mm (4" - 6");
use outer holes for bores of 150 - 200 mm (6" - 7¹/₈").

Counterstays, for use with internal extractors 16-21, 21-89 and 21-90

For connection to the internal extractor, screw the spindle into the clamping nut of the internal extractor.

Art. no.	Capacity (max.) t	kg	
16-22	7	4.80	251634
22-4	7	4.50	112478
22-5	9	7.80	012556

(* cf. page 40 for matching slide-hammer units)

Complete Sets of Bearing Pulling and Extracting Tools

In metal cases

Type series 24 sets

Containing internal extractors, counterstays, pulling chuck and external pullers.



Art. no.	Contents	No.	kg	
24-A	6 internal extractors (12-46 mm)	21-1 - 21-6	10.50	012716
	2 counterstays	22-1 + 22-2		
	1 pulling chuck	23		
	1 battery terminal puller	43-1		
	1 two-arm puller	20-1		
24-B	8 internal extractors (12-70 mm)	21-1 - 21-8	19.50	012891
	2 counterstays	22-1 + 22-2		
	1 pulling chuck	23		
	1 battery terminal puller	43-1		
	2 two-arm pullers	20-1 + 20-2		
24-C	7 internal extractors (12-58 mm)	21-1 - 21-7	26.30	012976
	1 internal extractor (56-110 mm)	21-89		
	3 counterstays	22-1, 22-2, 22-4		
	1 pulling chuck	23		
	1 battery terminal puller	43-1		
	2 two-arm pullers	20-1 + 20-2		



Type series 25 sets

Containing internal extractors and counterstays only.

Art. no.	Contents	no.	kg	
25-K	3 internal extractors (6 - 20 mm)	21-00 - 21-2	3.50	863899
	1 counterstay	22-1		
25-A	6 internal extractors (12- 46 mm)	21-1 - 21-6	7.00	013058
	2 counterstays	22-1 + 22-2		
25-B	8 internal extractors (12- 70 mm)	21-1 - 21-8	9.90	013133
	2 counterstays	22-1 + 22-2		
25-C	7 internal extractors (12- 58 mm)	21-1 - 21-7	17.80	013218
	1 internal extractor (56-110 mm)	21-89		
	3 counterstays	22-1, 22-2, 22-4		



Ball-bearing Pulling and Extracting Tools




Internal extractors with slide hammer as sets in metal cases

Art. no.	for bores: Ø	Set comprising:	kg	
26-A	6-16 mm	22-0/21-00/21-02/21-1	1.00	781629
26-B	6-40 mm	22-0/21-00/21-01/21-1 22-01/21-2/21-4/21-5	4.50	781704
26-C	8-46 mm	22-0/21-01/21-1/21-2 22-01/21-4/21-5/21-6	5.00	781889
26-D	28-58 mm	22-01/21-5/21-6/21-7	3.50	781964

Internal extractor with slide hammer, type series 224

For pulling end journal bearings, pilot bearings, bearing races and similar parts. The hooks at the front of the tool insert into the bore of the part to be removed and are forced around it when the screw is turned. A few sharp blows with the hammer will then do the rest.

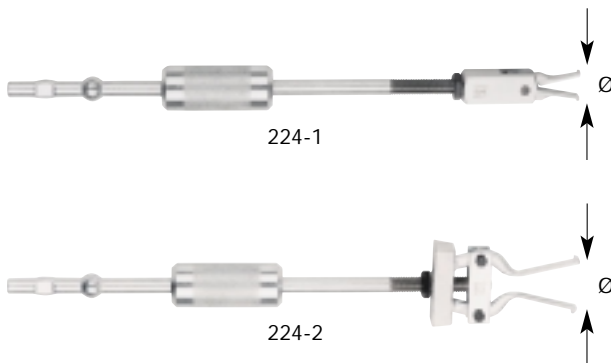

Art. no.	Diametral range mm		Reach mm		kg	
224-1	12-35	1/2-1 3/8	25	1	1.50	325656
224-2	15-50	5/8-2	50	2	1.60	325571
Component parts:						
224-GH	Sliding-hammer unit (without extractor)				1.20	325403
224-121	Internal extractor for 224-1 (without slide hammer unit)				0.30	325731
224-221	Internal extractor for 224-2 (without slide hammer unit)				0.40	325816

Internal extractor with slide hammer, type 221-G

Practical extractor with wide gripping range. Especially well-suited for use in confined spaces with too little room for attaching counterstays or pulling tools.

Once the extractor has been attached, extraction is effected by sharp blows with the slide hammer.



Art. no.	mm		mm	L mm	kg	
221-G	30-180	1 1/4-7	140	5 1/4	4.00	175824

Pulling chuck, type 23

For use in pulling 5-32 mm dia. deep-groove inner races out of magnetos, dynamos/generators, electric motors and small electric machines. Same mode of action as that of a keyless three-jaw drill chuck.



Removing an inner ball bearing race with the aid of a pulling chuck type 23.

Art. no.	mm		kg		
23	5-32	3/16-1 1/4	1.50	012631	614 159

Extracting Tools



Needle-bearing extractor set in metal case

Art. no.	Set comprising the extractors:	Counterstay	for needle bearings with bores of:	kg	4021176
25-N	21-41 to 21-46	22-1	12-22 mm	2,60	787096

Needle bearing extractors, type series 21-40 through 21-46

For extracting needle bearings from crankshafts, casings, etc.



Art. no.	mm	"	Fits needle bearings for shaft dia.:		kg	4021176	22-1-22-2
			mm	"			
21-40	9,6-18	$\frac{3}{8}$ - $\frac{3}{4}$	10	$\frac{3}{8}$	0.22	411526	22-1-22-2
21-41	11,5-19	$\frac{29}{64}$ - $\frac{3}{4}$	12	$\frac{1}{2}$	0.22	186066	22-1-22-2
21-42	12,5-21	$\frac{1}{2}$ - $\frac{55}{64}$	14	$\frac{9}{16}$	0.22	186141	22-1-22-2
21-43	14,5-22	$\frac{37}{64}$ - $\frac{7}{8}$	15+16	$\frac{5}{8}$	0.22	186226	22-1-22-2
21-44	16,5-23	$\frac{21}{32}$ - $\frac{59}{64}$	17+18	$\frac{3}{4}$	0.23	186301	22-1-22-2
21-45	18,5-24	$\frac{47}{64}$ - $\frac{61}{64}$	20	$\frac{13}{16}$	0.23	186486	22-1-22-2
21-46	20 -25	$\frac{51}{64}$ - 1	22	$\frac{7}{8}$	0.23	186554	22-1-22-2


(Matching counterstays type 22, see page 40.)



Set of parallel-key and dowel-pin extractors

Threaded adapter with slide hammer for extracting parts with internal threads such as parallel keys (e.g., DIN 6885), dowel pins (e.g., ISO 8735), bearing shafts with safety bores, etc.

Art. no.	Set in metal case with threaded adapters for:	kg	4021176
223-K	M 3/M 4/M 5/M 6/M 8/M 10/M 12/M 16	2.60	784859

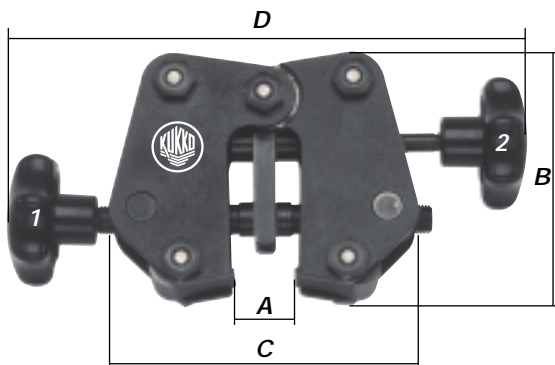

Key puller with eccentric mechanism

With this tool, it is easy to pull tight-fitting keys out of shaft keyways without causing any damage.


Art. no.	mm	"	mm	A	B	C	D	kg	4021176
T-139-1	3	3-35	35	0-35	110	122-144	236	2	779176

Operation:

First, use knob 1 to adjust the jaws of the puller to the width of the key to be pulled. Then, use knob 2 to fully extend them. Next, position the puller, and use knob 1 to tighten the jaws against the key.

Turn in knob 2 to activate the eccentric mechanism and pull the key up and out of the keyway. To remove the key from the puller, use knob 2 to turn the jaws back to their starting position.

Extracting Tools for Parts with Tapped Bores




Screw plugs

for use with type series 22 counterstays (cf. page 40)

These plugs screw into the center screw of the counterstay for extraction of parts with concentric tapped bores.

Art. no.	Suitable for counterstays 22-1, 22-2, 22-3*	kg	
22-1-AS	Complete set, comprising:	0.17	339288
040 038 54	Screw plug M 4	0.02	
050 038 54	Screw plug M 5	0.03	
060 040 54	Screw plug M 6	0.03	
080 042 54	Screw plug M 8	0.03	
100 046 54	Screw plug M 10	0.03	
120 048 54	Screw plug M 12	0.03	

* Since the standard counterstay 22-3 only comes with a size-3 reduction collar, the extra size-2 reduction collar required for this application must be ordered separately (Art. no. 022 200 21).

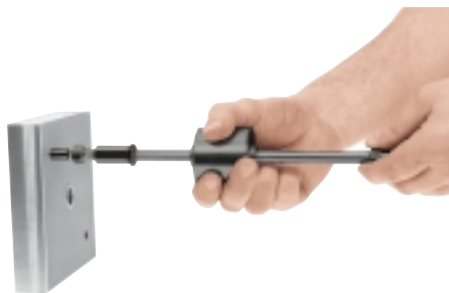

Internal extractor with slide hammer, type series 223 for parts with tapholes

For pulling parts with tapholes. The appropriate screw plug screws into the taphole of the part in question, which can then be extracted by sharp blows with the slide hammer. **Indispensable for extracting pins and studs with female threads**, e.g., as per **DIN 7978/ISO 8736** or **DIN 797/ISO 8735**.

Art. no.	Description	kg	
223	Complete extractor, comprising:	1.03	309083
223-GH	Slide hammer unit	0.86	309168
	Screw plug to fit		
	Screw		DIN 7978 DIN7979
040 038 54	M 4		- A 6 - C 6
050 038 54	M 5		- A 8 - C 8
060 040 54	M 6		- A 10 - C 10
			- C 12
080 042 54	M 8		- A 12 - C 14
			- A 14 - C 16
100 046 54	M 10		- A 16 - C 02
120 048 54	M 12		- A 20 -

Other threads on inquiry.



Puller with slide hammer, type 230 for parts with tapped bores

A universal tool for pulling parts with tapped bores, e.g., spur wheels, knock-out pins, etc. The flange has slots of various size to accept standard-type bolts, which screw into the tapped bores in the workpiece.

Pulling is effected by attaching the puller and executing several sharp blows with the slide hammer.

Art. no.	For bolt dia.: mm	"	For bolt-circle dia.: mm	"	kg	
230	4-14	1/8-1/2	100-150	4-6	3.80	031038


(See also page 69)

KUKKO - Inventor of the Pulling Tool Innovation by Tradition since 1919





Deep-groove Ball Bearing Extractors, Type series 70

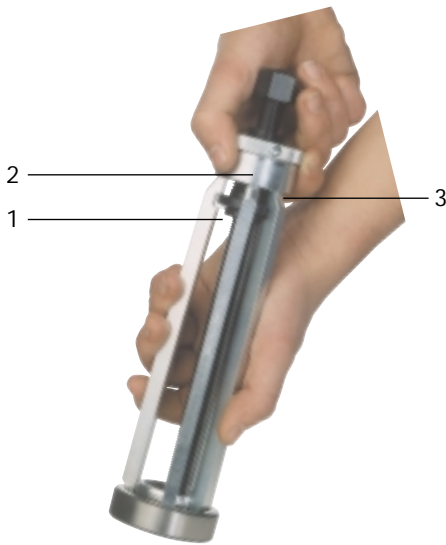

These extractors are used for quick & easy removal of ball bearings mounted on shafts in housings.

For ball bearings: types 6000 - 6021 types 6200 - 6222
types 6300 - 6317 types 6403 - 6415

Ball bearing extractors, type series 70, without arms

Art. no.	Suitable sets of arms	kg	Barcode	
70-1	70-711, 70-712, 70-713	0.30	021138	Select required
70-2	70-721 + 70-722	0.60	021213	arms from
70-3	70-731 + 70-732	1.20	021398	table below.
70-4	70-4730 + 70-4731	2.00	316418	
	70-4733 + 70-4734			

Simple operation:



Select the extractor and arms from the table at right, proceeding from the appropriate ball bearing number and working to the left. Insert the claws between the balls in the outer race of the bearing. For any bearing marked with an asterisk (*), first place a spacer ring carrying the matching bearing number on the inner bearing race.

Press the upper end of the claws together, so the recesses can engage around the collar of the threaded bushing (1). Then, firmly tighten the clamping plate (2), which in turn pushes the locking cap (3) over the claws. Remove the ball bearing by tightening the center screw.

6

Arms for extractors, type series 70, in sets of 4 ea.

Art. no.	Art. No	Length mm	kg per set	Case	Barcode	
				70-A	70-K	70-B
70-1	70-711	150	0.17	6000 6200	021479	
				6001		
				6002		
				6003		
70-1	70-712** (with 6 spacer rings)	150	0.24	*6004 6201 *6300	021541	
				*6005 *6202		
				*6006 *6203		
70-1	70-713** (with 5 spacer rings)	170	0.25	*6204 *6301	021626	
				*6205 *6302		
				*6303		
70-2	70-721** (with 1 spacer ring)	180	0.45	6007	021701	
				6008		
				6009		
				6010		
				*6013		
70-2	70-722** (with 4 spacer rings)	180	0.56	6011 *6206 *6304	021886	
				6012 *6207 *6306		
70-3	70-731** (with 6 spacer rings)	217	1.06	*6208 *6307 *6403	021961	
				*6209 *6407		
				*6210		
70-3	70-732** (with 9 spacer rings)	217	1.56	6211 *6308 *6404	022043	
				*6212 *6309 *6405		
				*6310 *6406		
				*6311 *6408		
70-4	70-4730** (with 4 spacer rings)	217	1.22	*6014	320453	
				*6015		
				*6016		
				*6017		
				*6018 *6213		
70-4	70-4731** (with 6 spacer rings)	217	2.00	*6019 *6214	320521	
				*6020 *6215		
70-4	70-4734 (with 1 spacer ring)	290	1.20	6021 *6409	320606	
70-4	70-4733** (with 19 spacer rings)	290	8.20	*6216 *6312 *6410	320781	
				*6217 *6313 *6411		
				*6218 *6314 *6412		
				*6219 *6315 *6413		
				*6220 *6316 *6414		
				*6221 *6317 *6415		
				*6222		

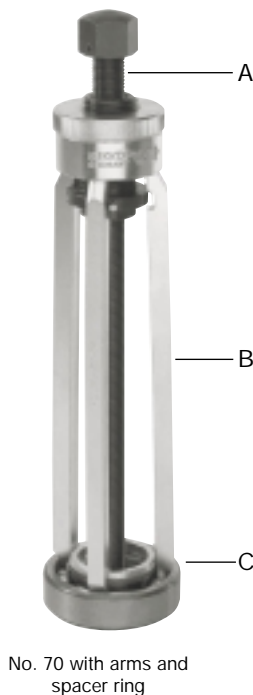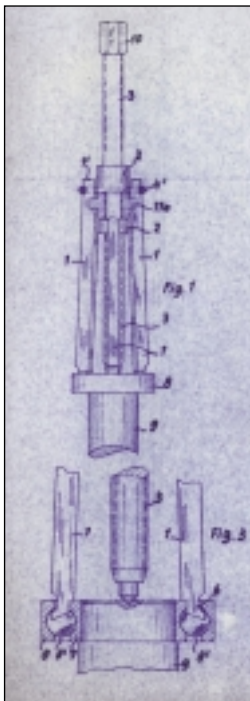

No. 70 with arms and spacer ring



** These sets come with additional spacer rings. The rings expand the utility range of each set of arms by bridging over substantial differences in race spacing.

Deep-groove Ball Bearing Tool Sets



Set of ball bearing pullers, type series 70-A,
in metal case
for small and medium-size bearings

For ball bearing sizes: * no. 6000 - 6013 no. 6200 - 6212
no. 6300 - 6311 no. 6403 - 6408



Art. no.	Contents		 kg	
70-A	1 extractor	Type 70-1	8.60	022128
	3 sets of arms	Type 70-711/-712/-713		
	1 extractor	Type 70-2		
	2 sets of arms	Type 70-721 + 70-722		
	1 extractor	Type 70-3		
	2 sets of arms	Type 70-731 70-732		
	1 set of spacer rings (26 ea.)			

* For SKF, FAG, Timken, NTN and equivalent bearings of other make.
The application range of this kit covers, e.g., all bearings in conformance with specification SKF TMMD 61.



Set of ball bearing pullers, type series 70-K,
in metal case
for small bearings

For ball bearing sizes: * no. 6000 - 6013 no. 6200 - 6207
no. 6300 - 6306



Art. no.	Contents:		 kg	
70-K	1 extractor	Type 70-1	5.00	786754
	3 sets of arms	Type 70-711/-712/-713		
	1 extractor	Type 70-2		
	2 sets of arms	Type 70-721 + 70-722		
	1 set of spacer rings (13 ea.)			

* For SKF, FAG, Timken, NTN and equivalent bearings of other make.



Set of ball bearing pullers, type series 70-B,
in metal case
for large bearings


For ball bearing sizes: * no. 6014 - 6021 no. 6213 - 6222
no. 6312 - 6317 no. 6409 - 6415

Art. no.	Contents		 kg	
70-B	1 extractor	Type 70-4	21.00	320866
	1 set of arms	Type 70-4730		
	1 set of arms	Type 70-4731		
	1 set of arms	Type 70-4733		
	1 set of arms	Type 70-4734		
	1 set of spacer rings (30 ea.)			

* For SKF, FAG, Timken, NTN and equivalent bearings of other make.






Universal Ball Bearing Pullers, Type series 69



These extractors enable quick and easy pulling of ball bearings of any make off of shafts in casings.


Operation:

The puller engages the bearing rings. This entails destruction of the cage. The spherical segments of the pulling elements insert between the inner and outer rings of the bearing. Turning them 90° tightens their grip and enables uniform extraction of the ball bearing. (cf. illustration at left)



After screwing the legs of the pulling tool into the pulling elements, fasten them to the head of the puller, and effect pulling by tightening the puller's pressure screw against the shaft upon which the bearing is mounted.

6



Set of universal ball bearing pullers, type series 69-A in metal case

For ISO ball bearings: no. 6004-6010 no. 6201-6206
no. 6300-6304

Art. no.	Gripping range A	kg	Barcode
69-A*	20- 95 mm	0.90	781391

* For SKF, FAG, Timken, NTN and equivalent bearings of other make.



Set of universal ball bearing pullers, type series 69-B in metal case

For ISO ball bearings: no. 6207-6211 no. 6305-6308
no. 6403-6405

Art. no.	Gripping range A	kg	Barcode
69-B*	35-120 mm	1.90	781476

* For SKF, FAG, Timken, NTN and equivalent bearings of other make.



Set of universal ball bearing pullers, type series 69-C in metal case

For ISO ball bearings: no. 6021-6032 no. 6309-6321
no. 6212-6230 no. 6406-6417

Art. no.	Spannbereich A	kg	Barcode
69-C*	56-220 mm	7.40	781544

* For SKF, FAG, Timken, NTN and equivalent bearings of other make. The application range of this set covers, e.g., all bearings in conformance with specification SKF TMBP 20.

Bearing Installation Tools



Bearing fitting tool kits

For quick and easy mounting of ball and roller bearings up to 50 mm i.d. and of bushes, seal rings, belt pulleys and similar parts.


This kit contains a variety of 33 hardened impact rings and 5 impact sleeves that slide over the shaft end up to 220 mm, plus a non-rebounding hammer (0.7 kg) with spark-suppressing nylon head.

The required combination of impact ring and impact sleeve for any particular application is shown in the table affixed to the inside of the cover. O-ring seals provide the positive force required for assembly. The necessary force is applied by pounding the impact sleeve with the nonrebounding, spark-free hammer.

The precisely matching components, manufactured with the greatest precision, ensure that the forces involved in the installation of bearings on shafts or in housing bores are transmitted uniformly to the lateral faces of the inner and outer races.



71



Bearing fitting tool kit, type series 71

Extra-sturdy tool-steel version for shop application and for use in pulling and installing particularly tight-fitting bearings with the aid of a shop press.


Set made of tool steel for heavy duty and a long service life. Consequently, unlike lightweight plastic varieties, these tools can be used for pressing-in and pressing-out operations on shop presses.

Art. no.	For bearings* et. al.		kg	Barcode
	Inside diameter (d)	Outside diameter (D)		
71	10-50 mm	26-110 mm	21.00	314841

* For SKF, FAG, Timken, NTN and equivalent bearings of other make. The application range of this kit covers, for example, all bearings in conformance with specification SKF 729 125.



T-071-L



Bearing fitting tool kit, type series T-071

Made of shock-resistant polyacetate, this light model is designed to be taken along and used out in the field.

Art. no.	Diametral range		kg	Barcode
	Impact rings	Impact sleeves		
T-071-L	10-50 mm	18-32-52 mm	4.00	822483

* For SKF, FAG, Timken, NTN and equivalent bearings of other make. The application range of this kit covers, for example, all bearings in conformance with specification SKF TMFT 33.



Bearing pry bars

These high-alloy, heat-treated chrome-steel tools are very practical for use in prying apart close-fitting bearings and for positioning bearings and similar parts.

Art. no.	Dimensions: mm	kg	Barcode
T-123-2	400 x 14 (quadr.)	0.50	826443
T-123-3	400 x 17 (hexag.)	0.60	826511



Bearing Pullers, Type Series 112 and 113



112-1

112-10
112-2
112-20112-3
112-4

113-20

113-3
114-4
113-5

Self-centering versions of Swedish design for the gentle, non-destructive removal of roller bearings and similar parts.

For the proper removal of bearings, a suitable self-centering bearing puller is needed to avoid any danger of damage to the bearing and/or the bearing seat on the shaft.

Use a three-arm model whenever possible to ensure even distribution of the load. A two-arm model should be used in confined spacers where alignment of a three-arm puller is not possible for lack of room.

Two-arm bearing pullers, type series 112

Art. no.	mm		mm		kg	4021178	mm	mm	Working range according to SKF tool no.:
112-1	55	2 ³ / ₁₆	45	1 ³ / ₄	0.35	418143	610	110	8 TMMP 2 x 55
112-10	65	2 ⁹ / ₁₆	70	2 ³ / ₄	0.40	415591	610	110	8 TMMP 2 x 65
112-2	90	3 ¹ / ₂	70	2 ³ / ₄	0.80	419218	614	135	17 TMMP 2 x 90
112-20	100	4	100	4	0.90	420283	614	160	17 TMMP 2 x 100
112-3	185	7 ¹ / ₄	165	6 ¹ / ₂	2.00	420368	616	220	17 TMMP 2 x 170
112-4	250	9 ⁷ / ₈	250	9 ⁷ / ₈	4.70	421358	621	355	22 TMMP 2 x 230

Three-arm bearing pullers, type series 113

Art. no.	mm		mm		kg	4021178	mm	mm	Working range according to SKF tool no.:
113-20	125	4 ⁷ / ₈	100	4	1.10	422423	614	160	17 TMMP 3 x 125
113-3	185	7 ¹ / ₄	165	6 ¹ / ₂	2.70	422751	616	220	19 TMMP 3 x 185
113-4	250	9 ⁷ / ₈	250	9 ⁷ / ₈	5.90	422188	621	355	22 TMMP 3 x 230
113-5	300	11 ⁷ / ₈	250	9 ⁷ / ₈	6.10	423178	623	325	24 TMMP 3 x 300

Operation:

Before dismounting a bearing that is to be reused, mark its position on the seat. Subsequent refitting of the bearing in that same position will considerably extend its service life.


Where the bearing has been mounted on the shaft with an interference fit, the puller arms should grip the inner ring. After carefully centering and aligning with the taper adapter, remove by tightening the center screw against the shaft.

Under cramped conditions, where it is difficult to engage the inner ring, removal should take place using the outer ring. This requires constant rotation of the outer ring during removal to avoid damage to the bearing components due to an uneven load.

In such a case, removal is not effected as stated above by tightening the center screw, but by turning the puller and, hence, the encompassed outer ring around the stationary center screw.

To remove the bearing, the center screw must be locked against the axle. The puller on the withdrawal claw is then rotated by hand around the center screw until the bearing pulls free of its setting.

KUKKO - the Original

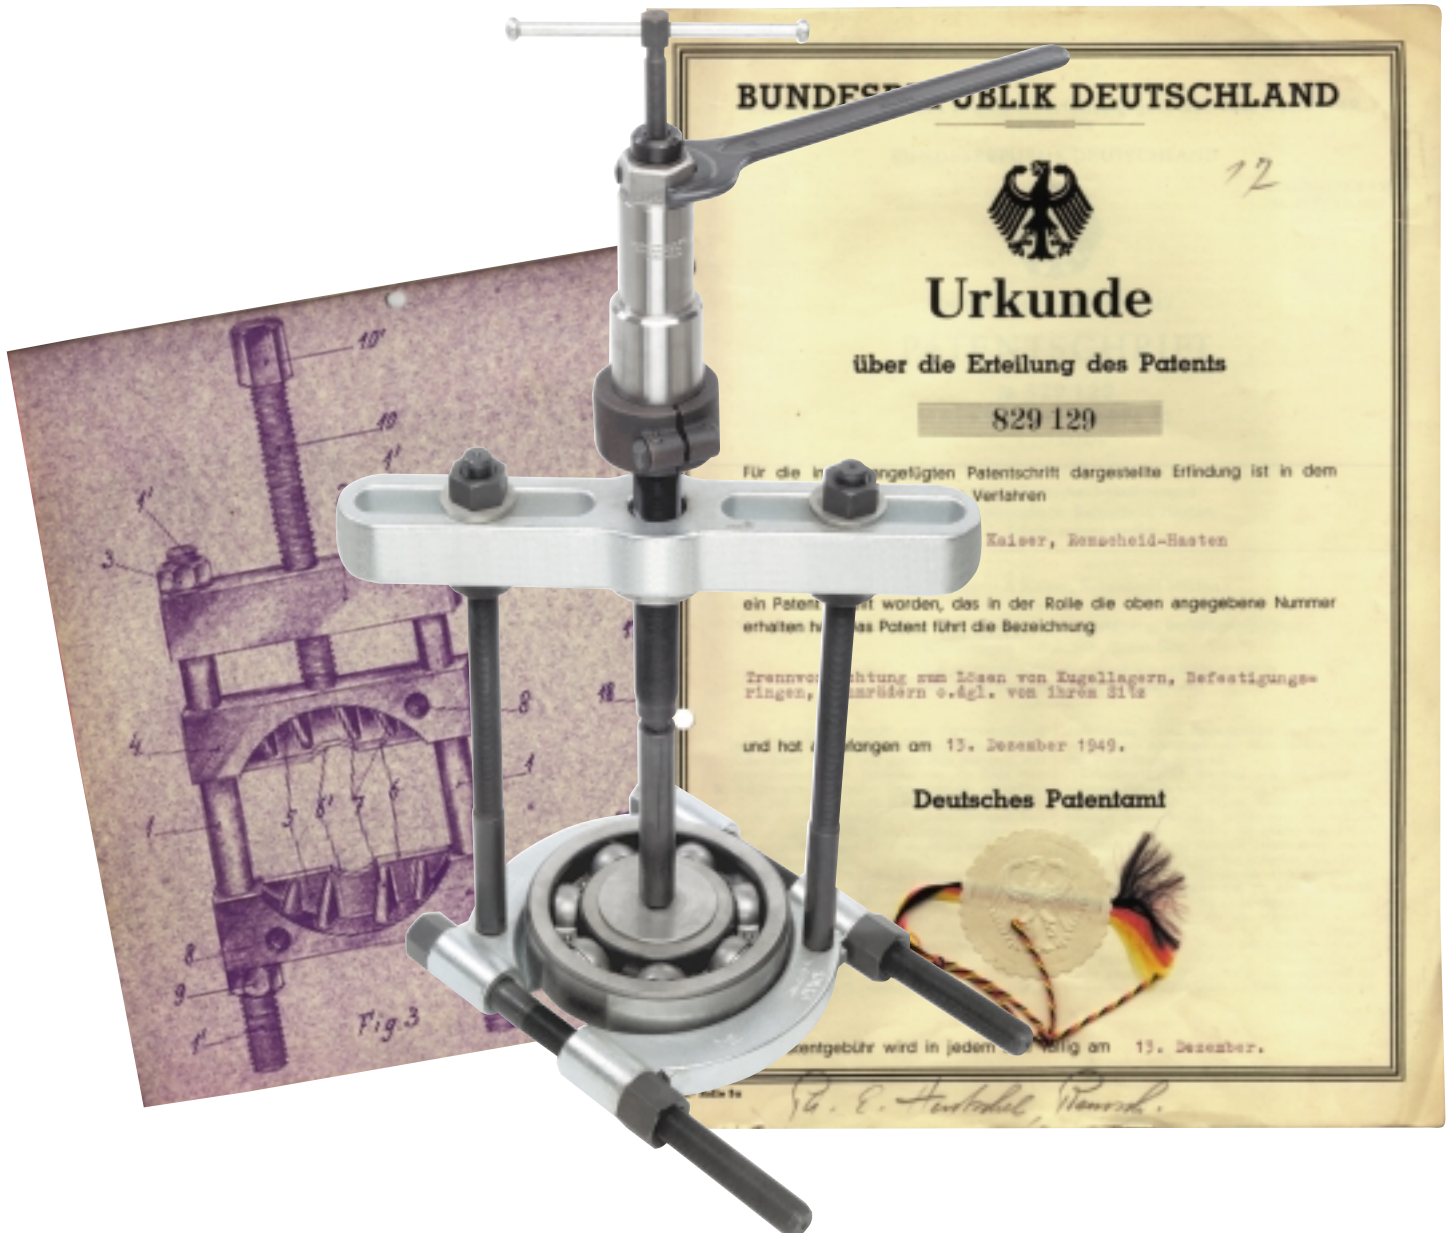

Separators, Type Series 15 and 17 with Pulling Tools, Type Series 18

For pulling ball bearings, roller bearings, inner races and other tight-fitting parts.

The sharp, wedge-shaped edges of the separator jaws engage behind the parts to be withdrawn and pry them off their seats.

For pulling items off of a shaft, use the separator together with a suitably sized series-18 pulling tool. The bolts of the matching pulling tool screw into the two tapholes on the separator..



Separators, Type Series 15 and 17 with Pulling Tools, Type Series 18



Figure 1



Figure 3

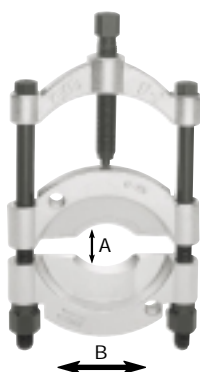


Operation:

Tighten the screw against the end of the shaft (figures 1 and 2).
Hydraulic rams can be used on the larger models.

Hydraulic mode (figure 3):

Use the spanner (b) to squeeze the hollow spindle of the hydraulic ram tightly up against the end of the shaft. Turn the handle (a) to activate the hydraulic ram. (For detailed instructions, see page 18.)

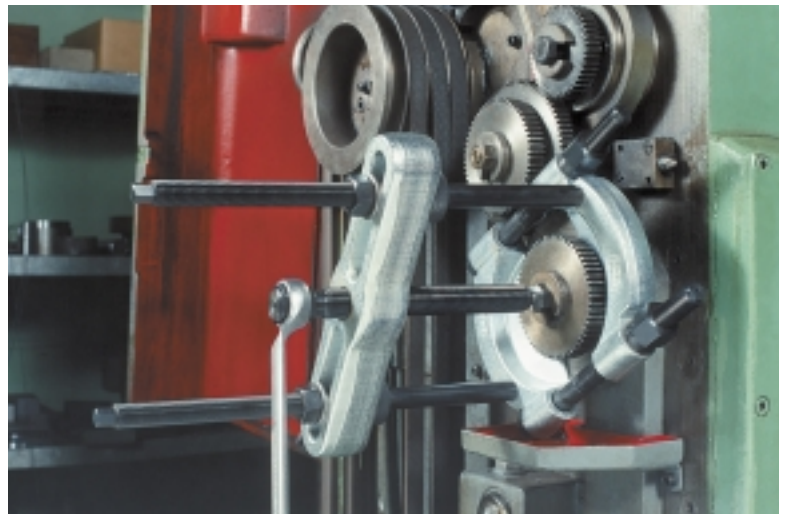





Series 15 with series 18

Figure 2

Separators, type series 15

Press the separator jaws together by uniformly tightening the nuts on both sides.





Art. no.	Ø A mm	 B mm	 kg		
15-0	5- 60	60	0.70	006951	18-0
15-1	12- 75	75	1.00	007033	18-1
15-2	22-115	115	2.50	007118	18-2
15-3	25-155	155	5.20	007293	18-3
15-4	30-200	200	11.50	007378	18-4
15-5	30-250	250	18.60	007453	18-5

For larger sizes, please refer to our HYP range at the end of this catalogue.

Separators, type series 17

with quick-action pressure screw

Especially easy to handle, because the separator jaws tighten quickly and centrally with the aid of a pressure screw.

Art. no.	Ø A mm	 B mm	 kg		
17-0	5- 60	60	0.95	008108	18-0
17-1	12- 75	75	1.50	008283	18-1
17-2	22-115	115	3.34	008368	18-2
17-3	25-155	155	6.90	008443	18-3

Pulling Tools

Pulling tools, type series 18

For use with a separator, screw the pulling bolts into the tapholes in the separator jaws.



Art. no.	A mm	B mm max.	kg			mm	Capacity (max.)	Suitable for separator no.
18-0	50-110	150	0.85	075599	612 130	14	3 to	15-0 + 17-0
18-1	60-150	200	1.70	075674	618 175	19	5 to	15-1 + 17-1
18-2	60-200	250	3.20	075759	621 170	22	7 to	15-2, 17-2, 13-2
18-3	80-300	300	6.20	005961	626 280	27	10 to	15-3, 17-3, 13-3
18-4	120-380	350	13.90	006043	633 425	27	15 to	15-4
18-5	150-440	400	20.70	075834	637 600	41	20 to	15-5

A hydraulic spindle no. 8-1-B or 8-2-M can be used in place of a mechanical pressure screw on models 18-4 and 18-5.



Extensions, type series 19

Art. no.	Length, mm	kg		Suitable for no.
19-1-P	100	0.30	169984	18-0 + 18-1
19-2-P	100	0.60	170041	18-2
19-3-P	100	0.60	170126	18-3
19-4-P	200	1.60	168321	18-4
19-5-P	200	2.00	152306	18-5

Complete sets of separators and pulling tools in metal cases

Sets, type series 15 with standard separators

Art. no.	15-K	15-A	15-B	15-C	15-D
Contents:					
1 separator	15-0	15-1	15-2	15-3	15-4
1 pulling tool	18-0	18-1	18-2	18-3	18-4
1 pair of extensions	19-1-P	19-1-P	19-2-P	19-3-P	19-4-P
Capacity	mm: 60	75	115	155	200
Weight, incl. case	kg: 2.70	4.70	8.40	14.70	32.00
	007641	007521	007606	007781	007866




Sets, type series 17 with separators and quick-action pressure screw

Art. no.	17-K	17-A	17-B	17-C
Contents:				
1 separator	17-0	17-1	17-2	17-3
1 pulling tool	18-0	18-1	18-2	18-3
1 pair of extensions	19-1-P	19-1-P	19-2-P	19-3-P
Capacity	mm: 60	75	115	155
Weight, incl. case	kg: 2.9	5.0	9.2	16.1
	008856	008511	008696	008771



Pulling Tools - Accessories

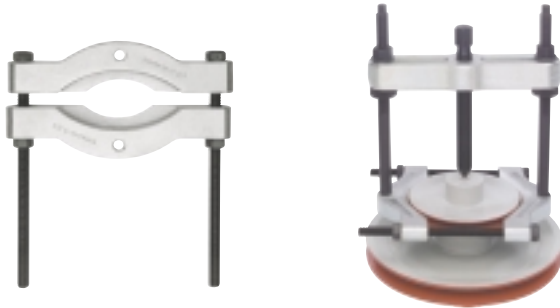

V-belt pulley puller, type series 13

The jaws of this tool engage deeply in the groove of single or stepped pulleys to facilitate their removal.


Uniform load distribution prevents damage to the pulley.

For pulling, screw this puller together with a suitable type-18 pulling tool (page 53).


Art. no.	For pulleys with nominal diameters of:		kg	4021176	Suitable for no.
	mm	"			
13-2	40-150	1 ³ / ₄ -5 ⁷ / ₈	1.90	169724	18-2
13-3	50-250	1 ⁵ / ₈ -10	11.00	169724	18-3

Screw adapters for pullers belonging to type series 18


These adapters serve in pulling parts with tapholes. They screw into the tapholes in the part to be removed and are joined to the pulling bolts of the corresponding puller by means of the connecting nuts supplied with the unit.

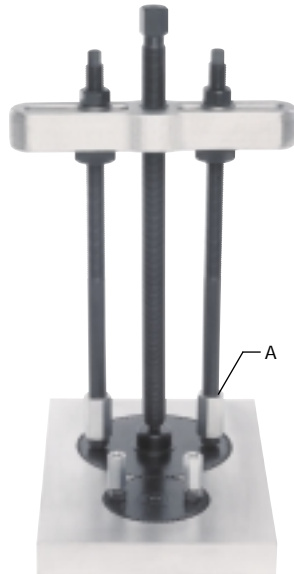

Art. no. pair of adapters (2 ea.) incl. connecting nuts	For thread sizes	kg	4021176	Suitable for no.
18-004 A	M 4	0.08	337383	
18-005 A	M 5	0.09	337468	18-0
18-006 A	M 6	0.09	337536	+
18-008 A	M 8	0.10	337611	18-1
18-010 A	M 10	0.10	337796	
18-012 A	M 12	0.10	337871	(A = M 10)
18-016 A	M 16	0.18	788574	
18-208 A	M 8	0.26	337383	
18-210 A	M 10	0.26	337468	
18-212 A	M 12	0.30	337536	18-2
18-214 A	M 14	0.32	337611	
18-216 A	M 16	0.34	337796	(A = M 14 x 1.5)
18-218 A	M 18	0.36	337871	
18-314 A	M 14	0.55	338601	
18-316 A	M 16	0.57	338786	
18-318 A	M 18	0.60	338861	18-3
18-320 A	M 20	0.62	338946	
18-322 A	M 22	0.64	339028	(A = M 18 x 1.5)
18-324 A	M 24	0.68	339103	



Pair

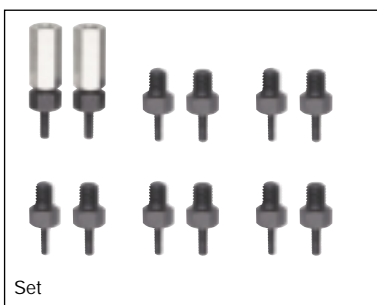

Set

Screw adapters - complete sets for type series 18-0

Each set comprises 2 screw plugs per thread size and one pair of connecting nuts for fastening to the pulling bolts of the respective pulling tool.

Art. no. set	For thread sizes	kg	4021176	Suitable for no.
18-0-AS	M 4, M 5, M 6, M 8, M 10, M 12	0.36	337048	18-1
18-2-AS	M 8, M 10, M 12, M 14, M 16, M 18	0.94	337123	18-2
18-3-AS	M 14, M 16, M 18, M 20, M 22, M 24	1.00	337208	18-3

Pulling Tools - Accessories

Size	Ø A	Ø B	Art.-no.
1	25	19	Y-01-17
2	28	22	Y-02-17
3	32	25	Y-03-17
4	35	28	Y-04-17
5	41	32	Y-05-17
6	44	35	Y-06-17
7	48	38	Y-07-17
8	50	41	Y-08-17
9	54	44	Y-09-17
10	60	48	Y-10-17
11	64	50	Y-11-17
12	67	54	Y-12-17
13	70	57	Y-13-17
14	73	60	Y-14-17
15	78	64	Y-15-17
16	83	70	Y-16-17
17	90	76	Y-17-17



Step plate adapter sets

For supporting the spindle when center-bored parts are involved, e.g., hollow shafts, etc. Please refer to the table at left regarding the dimensions of individual adapters.

These adapters come in sets.

Adapter sets:

Art. no.	Size	For axle-bore dia.		kg	
		mm	"		
Y-18-17	1-11	Ø 20-62	Ø 3/4-2 1/2	2.20	235078
Y-19-17	5-16	Ø 33-81	Ø 1 1/4-3 1/8	2.20	235153
Y-20-17	12-17	Ø 55-88	Ø 2 1/8-3 1/2	2.20	235238



Hydraulic rams for pulling tools

The great advantage of these powerful hydraulic screws is their ability to quickly and easily remove tight-fitting parts.

All you need to do is replace the mechanical ram with a hydraulic one. The rated capacity is achieved at a torque of 45 Nm (8-1) or 30 Nm (8-2), respectively. Do not overtorque!

Art. no.	Capacity t	Stroke mm	kg		Suitable for no.
8-2-M	20	10	10.00	034916	18-5

(cf. page 18 for operation)

Note:

Perfect alignment between the tools and the part to be pulled is very important. Misalignment would impose undo loads on the parts involved. This could damage to the tool or cause accidents. Before applying any hydraulic pressure, securely wrap the tool and workpiece in a protective blanket (page 92).

Auxiliary hydraulic rams, type series 9

Highly efficient. Minimal space requirement.

These rams make a first-class auxiliary tool for boosting the working force of mechanical pullers applied to particularly stubborn components.

To avoid overloading, such rams should only be used with size-3 pullers or larger.






Art. no.	Dia., mm	Height, mm	Stroke, mm	Max. permissible load		kg	
				Pulling force	Torque		
9-1	37	62	10	100 KN	35 Nm	0.85	005053
9-2	50	80	15	150 KN	50 Nm	1.60	005138

(cf. page 19 for operation)



„ECONOMY“ Pullers with Adjustable Arms

Uncomplicated, low-cost models for use in pulling gears, ball bearings, V-belt pulleys and similar parts. Suitable for outside and inside pulling, thanks to reversible, sturdy, one-piece, self-locking arms that tighten their grip under pressure to prevent slippage.

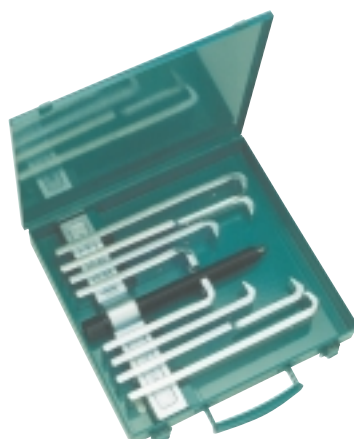

Two-arm pullers, type series 200

Art. no.	mm	mm	mm	mm	kg	021176	mm	mm
200-1	100	4	100	4	1.20	025846	614 137	13
200-2	150	6	100	4	2.00	025921	614 137	13
200-3	200	8	150	6	3.50	026003	621 210	22
200-4	250	10	150	6	5.50	026188	621 210	22
200-41	250	10	200	8	6.00	026263	621 210	22
200-5	350	14	150	6	6.40	026348	621 210	22
200-51	350	14	200	8	7.00	002243	621 210	22

Three-arm pullers, type series 301

Art. no.	mm	mm	mm	mm	kg	021176	mm	mm
301-1	100	4	100	4	1.60	84970	614 137	13
301-2	150	6	100	4	2.40	84988	614 137	13
301-3	200	8	150	6	4.20	84996	621 210	22
301-4	250	10	200	8	6.60	85001	621 210	22

Sales display and workshop stand with type-200 pullers

Art. no.	kg	0021176	Including puller nos.
200-ST	20.50	003073	200-1, -2, -3, -4, -51

When ordering a complete stand and set of no. 200-ST pullers, you pay only for the pullers - the stand is free.

Farm and shop pullers with 8 multi-purpose jaws, type series 200-U

This economical and versatile model comes with four pairs of multi-purpose jaws that can be reversed for use in both inside and outside pulling. The puller comes with four pairs of arms for different jobs.

Art. no.	mm	mm	mm	mm	kg	021176	mm	mm
200-U	250	10	80-180	3-7 ³ / ₄	6.50	025433	621 210	22
200-UM	Puller no. 200-U in metal case				8.30			

The jaws interconnect by means of M 10 / 3/8" cap screws to yield a maximum length of 580 mm (23").

Jaws

Type	mm	mm	kg	A	B	C	D
A	80	3 ¹ / ₈	0,50	Short, broad jaws with slots for cap screws; used for pulling off parts with tapholes			
B	120	5	0,60	Medium-length, broad jaws with sharp talons			
C	180	7 ¹³ / ₁₆	0,80	Long, broad jaws with sharp talons			
D	180	7 ¹³ / ₁₆	0,60	Long, slender jaws for inside pulling and working in confined spaces			

„ECONOMY“ Swivel-arm Pullers



„ECONOMY“ mechanical pullers with reversible double-end S jaws

Art. no.	Type	mm	mm	mm	kg	4021176	610 110	8	
208-0	2-arm	100	4	50-75-100	2-3-4	0.35	432248	610 110	8
209-0	3-arm	100	4	50-75-100	2-3-4	0.45	432323	610 110	8



Two-arm „ECONOMY“ mechanical pullers with curved, length-adjustable arms

Art. no.	mm	mm	mm	kg	4021176	614 160	mm	
208-01	20-170	$3/4-6^{3/4}$	95-125	$3^{3/4}-5$	0.90	432408	614 160	17
208-02	20-230	$3/4-9$	150-190	$6-7^{1/2}$	2.40	432651	621 210	22



Three-arm „ECONOMY“ mechanical pullers with curved, length-adjustable arms

Art. no.	mm	mm	mm	kg	4021176	614 160	mm	
209-01	20-170	$3/4-6^{3/4}$	95-125	$3^{3/4}-5$	1.30	432576	614 160	17
209-02	20-230	$3/4-9$	150-190	$6-7^{1/2}$	3.30	432736	621 210	22



„ECONOMY“ hydraulic puller

This puller is equipped with a type-8-1-F hydraulic pressure screw.
(For method of operation see page 18.)

Art. no.	mm	mm	mm	kg	4021176	Hydr.	Capacity t
209-2-B	500	20	228-300-400	9-12-16	12,50	432996	8-1-F 22-arm 15

The hydraulic screw can be replaced with a mechanical one to permit manual operation (order no. 11-3-0).

Note:

Perfect alignment of the hydraulic puller with the part to be withdrawn is very important. Misalignment would create extra bending forces and damage the tool or cause accidents. Before operating under pressure, part and puller should be wrapped securely in a KUKKO® protective blanket (page 92). The exerted forces must be carefully controlled during the pulling action. The max. permissible load is reached at a torque of 45 Nm, which must not be exceeded.



Driving Tools for KUKKO Push/Pull Devices

Art. no.	KN	max: to	Nm			mm
20-1	45	4.5	80	614 135	17	
20-10	45	4.5	80	614 135	17	
20-2	60	6	150	621 210	22	
20-20	60	6	150	621 210	22	
20-3	85	8.5	300	626 280	27	
20-30	85	8.5	300	626 280	27	
20-4	120	12	400	633 350	36	
20-40	120	12	400	633 350	36	

The user-information tables for the various mechanical push/pull devices (pp. 94 - 101) show the width across the flats of the pressure screw, the max. pulling capacity and the requisite torque (cf. examples at left), thus enabling selection of the best-suited driving tool for the job at hand. Torque wrenches are needed for the controlled application of pulling forces. The durably accurate STAHLWILLE Manoskop models listed here are fine-tuned to the application requirements of KUKKO's broad array of mechanical push/pull devices.



Manoskop torque wrench with integral ratchet handle

These sturdy, compact, lever-type torque wrenches feature robust bodies, long-term accuracy, and a guaranteed $\pm 4\%$ margin of error. Their quick, convenient scales show international units (Nm and ft./lb.). These wrenches „break“ automatically and feature a double-stop signal.

The tough hollow-steel body protects all the sensitive elements. Since the bending bar automatically snaps back to its starting position as soon as the set torque is reached, the measuring mechanism does not function in case of misuse - e.g., prying off jammed parts - and is therefore extensively immune to consequential damage.

Double-stop signal


The wrench signals its arrival at the set torque by „breaking“ a few degrees and making a snapping sound.



Blitz adjuster:

Push down the lock on the handle (Fig. A), move the slide adjuster to the desired

scale value (Fig. B), and release the lock. The setting is fixed.



Torque wrench, standard Manoskop series

with Blitz adjuster and reversing ratchet handle




Art. no.						b ₁	b ₂	h ₁	h ₂	L		
	Nm	ft.lb	Nm	ft.lb	"	mm	mm	mm	mm	mm	kg	
T-721-10	20-100	15-72,5	2.5	2.5	3/8	28	34,5	23	24	380	1.00	869730
T-721-30	60-300	50-220	10	10	1/2	28	44	23	27.5	531	1.71	869747



Knob adjuster:

Turn the large adjusting knob on the end of the handle until the desired torque appears in the window. This setting locks in automatically.



Torque wrench

Standard Manoskop series NF

with knob adjuster and reversible square ratchet handle for clockwise and counterclockwise torquing



Art. no.						b ₁	b ₂	h	L		
	Nm	ft.lb	Nm	ft.lb	"	mm	mm	mm	mm	kg	
T-721-NF	160-800	120-600	20	20	3/4	46.5	76	42	1013	6.77	869754

Driving Tools for KUKKO Push/Pull Devices



Box-wrench socket sets

Made of alloyed C-steel, burnished
Hexagonal with SL drive, DIN 3124 / ISO 27225

All mechanical push/pull devices must be hand-operated (industrial safety regulations). KUKKO's box-wrench sockets feature a specially designed gripping profile that acts directly, and therefore edge-protectively, on the hexagonal faces of the puller forcing screws, thus enabling a perfectly slip-free fit, maximum effective force, and a long service life.

3/8" set □, type series 1021

for the pressure screws of **small KUKKO pullers**
and for 5-10 mm nuts, bolts and screws



Art. no.	6-piece set sizes	For use with driving tool	kg	kg	kg
1021-K	8-10-12-13-14-17 mm	1020-00 + T-721-10	0.28	1	762321

1/2" set □, type series 1031

for the pressure screws of **medium-sized KUKKO pullers**
and for 10-16 mm nuts, bolts and screws

Art. no.	6-piece set sizes	For use with driving tool	kg	kg	kg
1031-K	17-19-21-22-24-27 mm	1030-00 + T-721-30	0.85	1	764226

3/4" set □, type series 1041

for the pressure screws of **large KUKKO pullers**
and for 16-24 mm nuts, bolts and screws

Art. no.	6-piece set sizes	For use with driving tool	kg	kg	kg
1041-K	24-27-30-32-36-41 mm	1040-00 + T-721-NF	2.80	1	766046

Ratchet handles for box-wrench sockets

made of alloyed C-steel, external squares to DIN 3120 A, with ball;
internal squares to DIN 3120 C, with indent

3/8" reversing ratchet handle □, type series 1020

fine-toothed, with reversing lever for clockwise and counterclockwise pulling



Art. no.	mm	For use with socket set	kg	kg	kg
1020-00	205	1021-K	0.35	1	760679

1/2" reversing ratchet handle □, type series 1030

fine-toothed, with reversing lever for clockwise and counterclockwise pulling



Art. no.	mm	For use with socket set	kg	kg	kg
1030-00	265	1031-K	0.60	1	762659

3/4" reversing ratchet handle □, type series 1040

fine-toothed, with reversing lever for clockwise and counterclockwise pulling



Art. no.	mm	For use with socket set	kg	kg	kg
1040-00	625	1041-K	2.55	1	764554



Tight-space Wrench No. 407



By innovatively applying to the open end the same bihexagonal, ratchet-like drive principle as that already featured by the box end of wrenches designed for working in tight spaces, we created this must-have set of problem solvers for getting at nuts, bolts and screws where there is little room to maneuver.

Benefits:

Access to places where no box-end wrench would fit.
Ratchet-like tightening in cramped spaces.
Quick engagement and release.
Edge-protective profile that zeros in on the araises.

Set comes in a plastic module case for keeping in a tool trolley or a workbench drawer.

10-piece set of tight-space combination wrenches with bihexagonal drive and same size of opening on both ends

Art. no.	Set (10 wrenches) sizes	kg		4021176
407-A	10-11-12-13-14 mm 15-16-17-18-19 mm	0.90	1	865978

Bolt/Screw Extractor Set No. 49-U-B



For removing broken bolts and screws; set comprising bolt/screw extractors, tungsten carbide-tipped spiral bits and bit guides for easy tapping of broken-off connectors, even deep inside tapped bores.



This version includes a torsion stud with six axial-grip cutters for transmission of maximum force, and a slip-on nut with fully broached inner profile, so the applied torque takes effect in the immediate vicinity of the break.

Operation:

Use a tungsten carbide-tipped bit (cf. table) to drill a small hole in the part to be removed, and then drill out the hole to the size required for the appropriate torsion stud.

If the bolt/screw is protruding or situated deep within the tapped bore, place the appropriate bit guide (cf. summary table in lid of box) on the broken-off part, and insert the bit through the guide.

Then, pound the torsion stud into the bore, and install the appropriate internal nut. Turn the assembly counterclockwise to extract the broken bolt/screw from the tapped bore.

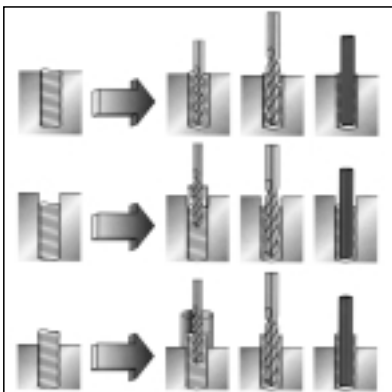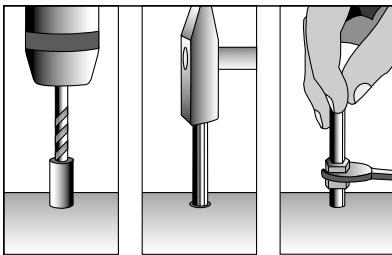

Art. no.	Designation	for bolts/screws	g	4021176
		mm	"	
49-U-B	Set (25-piece)	M 5-M 16	³ / ₁₆ - ⁵ / ₈	799136

Individual bolt/screw extractors, with accessories

The scope of supply includes a matching tungsten carbide-tipped bit and bit guide.

Art. no.	Bolt/screw	Spiral bit	Bit guides	g	4021176
	"	Pilot	Finish		
49-U-11	M 5-M 7	¹ / ₄	3.2 mm	A + B	26 799549
49-U-12	M 8-M 9	³ / ₈	3.2 mm 4.8 mm	C + D	50 799624
49-U-13	M 10	⁷ / ₁₆	4.8 mm 6.4 mm	E + F	86 799709
49-U-14	M 12	¹ / ₂	4.8 mm 8.0 mm	G + H	120 799884
49-U-15	M 14-M 16	⁵ / ₈	6.4 mm 8.7 mm	I + K	170 799969

Bolt/screw extractors No. 49

Made of tough chrome-vanadium steel

For removing broken bolts, type series 49

Using a spiral bit (see table) drill a hole in the item to be removed. Then, insert the extractor and turn counterclockwise to extract.



German version (with narrow flutes), type series 49

Art. no.	For bolt sizes mm	"	Spiral drill bit mm	g	4021176	
49-1	3- 6	$\frac{1}{8}$ - $\frac{1}{4}$	1.8	3	018008	5
49-2	6- 8	$\frac{1}{4}$ - $\frac{5}{16}$	3.2	5	018183	5
49-3	8-11	$\frac{5}{16}$ - $\frac{7}{16}$	4.5	12	018268	5
49-4	11-14	$\frac{7}{16}$ - $\frac{9}{16}$	6.5	25	018343	5
49-5	14-18	$\frac{9}{16}$ - $\frac{3}{4}$	8.5	45	018428	5
49-6	18-24	$\frac{3}{4}$ - 1	12.0	90	018596	5
49-7	24-33	1 - $1\frac{1}{8}$	15.3	170	018671	5
49-8	33-45	$1\frac{3}{8}$ - $1\frac{3}{4}$	20.0	290	018756	5
49-9	45-52	$1\frac{3}{4}$ - $2\frac{1}{8}$	25.0	550	018831	5
49-A	Set of 5 extractors, sizes 1-5, in plastic case			125	018916	1
49-B	Set of 6 extractors, sizes 1-6 in plastic case			230	019098	1
49-C	Set of 8 extractors, sizes 1-8 in plastic case			720	019173	1



American version (with broad flutes), type series 49-0

according to GM and Opel specifications

Art. no.	For bolt sizes mm	"	Spiral drill bit mm	g	4021176	
49-01	3- 6	$\frac{1}{8}$ - $\frac{1}{4}$	1.8	4	490569	5
49-02	6- 8	$\frac{1}{4}$ - $\frac{5}{16}$	3.0	6	490644	5
49-03	8-11	$\frac{5}{16}$ - $\frac{7}{16}$	4.0	15	490729	5
49-04	11-14	$\frac{7}{16}$ - $\frac{9}{16}$	6.0	26	490804	5
49-05	14-18	$\frac{9}{16}$ - $\frac{3}{4}$	8.0	46	490989	5
49-06	18-24	$\frac{3}{4}$ - 1	12.0	91	491061	5
49-0-S	Set of 6 extractors, sizes 1-6, in plastic pouch			200	491146	1



„Super Traction“ version, type series 49-T

This innovative extractor, with its optimized engagement geometry, combines the advantages of the finely fluted German version with those of bolt/screw extractors with angular gripping geometry, namely less requisite depths of bore and substantially higher transferable extraction torques.

Art. no.	For nut sizes mm	"	Spiral drill bit mm	g	4021176	
49-T-1	4- 5	$\frac{1}{8}$ - $\frac{1}{4}$	2.0	3	758461	5
49-T-2	5- 7	$\frac{1}{4}$ - $\frac{5}{16}$	3.2	7	758539	5
49-T-3	8-12	$\frac{5}{16}$ - $\frac{1}{2}$	4.5	14	758614	5
49-T-4	12-14	$\frac{1}{2}$ - $\frac{5}{8}$	6.5	27	758799	1
49-T-5	16-20	$\frac{5}{8}$ - $\frac{3}{4}$	8.5	46	758874	1
49-T-A	Set of 5 extractors, sizes 1-5, in plastic case			125	758959	1

Nut Splitters



54



55




56-1

- a) Chisel
- b) Threaded anvil with spanner flats
- c) Forcing screw



56-2



Note:

The flat design required for application does not permit automatic spring retraction of the chisel. For this reason, the chisel must be pushed back to the starting position by hand after each use.

1. Turn back the forcing screw (c).
2. Tighten the threaded anvil (b) with a wrench to push the chisel back into its starting position.



For use in touching up and cleaning damaged female and male threads. Each file has 8 different pitches. They are easy to use: simply place the thread file on the damaged thread to determine which pitch is needed. Then, use the tool in the manner of a file or scraper to effect the repair.

For splitting jammed or stripped nuts without damage to the bolt. Nut splitter chisels are wearing parts. Blunt, notched or broken chisels must be replaced immediately.

Mechanical nut splitters, type series 54

Double-edged models exerting twice the normal splitting force on irretrievable nuts in **quality classes 5, 6 and 8**.

Art. no.	For nut sizes (a.f.) mm	"	kg	4021176	Spare chisel Art. no.
54-2	10-27	¹³ / ₃₂ -1 ¹ / ₁₆	0.40	170614	54-2-M
54-3	17-36	¹¹ / ₁₆ -1 ⁷ / ₁₆	0.70	170799	54-3-M

Mechanical nut splitters, type series 55

For splitting irretrievable nuts in **quality classes 6 and below**.

Art. no.	For nut sizes (a.f.) mm	"	kg	4021176	Spare chisel Art. no.
55-0	4-10	⁵ / ₃₂ - ¹³ / ₃₂	0.10	019906	55-0-M
55-1	10-18	⁷ / ₁₆ - ¹¹ / ₁₆	0.22	020063	55-1-M
55-2	19-27	³ / ₄ -1 ¹ / ₁₆	0.44	020148	55-2-M
55-3	27-36	1 ¹ / ₈ -1 ⁷ / ₁₆	0.66	020223	55-3-M
55-4	32-50	1 ⁵ / ₁₆ -2	2.60	020308	55-4-M

Hydraulic nut splitters, type series 56

For splitting irretrievable nuts in **quality classes 5, 6, 8 and 10**.

Their offset shape makes these tools useful for confined spaces. Their hydraulic system minimizes the manual effort.

Art. no.	For nut sizes (a.f.) mm	"	kg	4021176	Spare chisel Art. no.
56-1	7-22	⁹ / ₃₂ - ⁷ / ₈	0.76	020483	56-1-M
56-2	22-36	⁷ / ₈ -1 ⁷ / ₁₆	2.80	020551	56-2-M
56-1ERS	Spare parts set for 56-1			244223	
56-1REP	Factory overhaul and reconditioning for 56-1			237966	
56-2ERS	Spare parts set for 56-2			244308	
56-2REP	Factory overhaul and reconditioning for 56-2			238048	

Operating instructions for hydraulic nut splitters 56-1 and 56-2

1. Place the chisel (a) in the starting position, with the cutting edge in axial alignment with the bolt and flat against one face of the nut.
2. Press the adjustable anvil up against the face of the nut opposite the chisel.
3. Split the nut by slowly turning in the pressure screw (c). The full hydraulic force is obtained by means of brief pauses.
4. The maximum force is achieved at a torque of 60 Nm (for a 56-1 splitter) or of 70 Nm (for a 56-2 splitter) and must not be exceeded, since any violation could lead to accidents and destruction of the tool.

Thread files, type series 97

Art. no.	Thread-repair file	kg	4021176	
97-1	For metric threads (ISO) with pitches of 0.8 - 1 - 1.25 - 1.5 - 1.75 - 2 - 2.5 - 3 mm	0.10	490231	1
97-2	For Whitworth and B.S.F. threads with pitches of 10 - 11 - 12 - 14 - 16 - 18 - 20 - 24 turns per inch	0.11	490316	1
97-3	For SAE (UNF/UNC) threads with pitches of 11 - 12 - 14 - 16 - 18 - 20 - 24 turns per inch	0.11	490491	1
97-4	For Whitworth „G“ pipe threads with pitches of 11-14-19-28 turns per inch	0.11	720253	1

Hydraulic Nut Splitters, Type series Y-57

Heavy-duty, pump-driven models




For splitting seized hexagon nuts belonging to any property class in connection with major maintenance and repair work on motor vehicles, machine tools, ships, structural steel assemblies and mining equipment, in lime/cement factories, petrochemical facilities, rolling mills, railway track machinery and much more.

High cutting capacity, can handle class-12.9 high-strength nuts (HRc 44); easy to use in any position. Available with a freely rotating angle connector (price on inquiry).

The compact design enables application in confined spaces and in poorly accessible places. Thanks to the hydraulic system, only little force need be applied. These nut splitters are equipped with a pull-back spring; the maximum hydraulic working pressure is 700 bar.

These nut splitters are supplied in a tote box, complete with spare chisels, spare bolts and a mounting tool.

The hydraulic pump needed for driving the splitter is a separate-order item (see below).

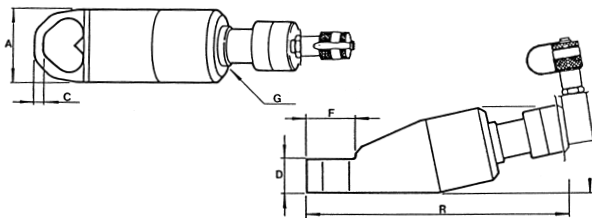

Art. No.	For nut sizes:		kg	A	B	C	D	F	R	4021176	Spare chisel
	SW mm	A.F. "									
Y-57-24	24-32	1 ⁵ / ₁₆ - 1 ¹ / ₄	3.5	64	72	13	30	51	260	870675	Y-5724M
Y-57-32	32-41	1 ¹ / ₄ - 1 ⁵ / ₈	5.0	75	82	16	36	65	286	870682	Y-5732M
Y-57-41	41-50	1 ⁵ / ₈ - 2 ¹ / ₁₆	8.8	94	107	21	45	74	325	870699	Y-5741M
Y-57-50	50-60	2 ¹ / ₁₆ - 2 ³ / ₈	13.5	106	122	24	54	90	366	870705	Y-5750M
Y-57-60	60-75	2 ⁷ / ₁₆ - 3	34.5	156	180	27	75	110	392	870712	Y-5760M



Max. operating pressure: 700 bar/10,000 psi

Hydraulic hand pump (suitable for all rams)

Sturdy, easy-running type with large oil volume. Single-stage with drain valve, pressure gauge connection and adjustable pressure limiting valve.

Art. No.	Useful oil volume: 700 cm ³	Delivery per stroke: 2.7 cm ³	kg	4021176
YHP-324	Hand pump with pressure gauge	6.00	045806	
YHP-325	Hand pump with pressure gauge and hose	7.00	045981	
YHP-326	Hand pump with pressure gauge and hose in metal case	13.00	046483	

High-pressure hose (suitable for all rams)

Complete with anti-kink spring guard and 3/8" high-flow coupler

Art. No.	Standard length	kg	4021176
YF-200	2000 mm 6 ² / ₃ ft	1.0	045646



Hydraulic tiptoe pump

Two-stage model, smooth-running for 53 kg of foot-applied force, appropriate for 5-, 10-, 20- and 30-ton cylinders and all type-Y-57 nut splitters.

Art. No.	Description	Oil volume cm ³	kg	4021176
YFP-320	Tiptoe pump, 700 bar (70 MPa)	500	4.8	870880

See page 91 for more hydraulic pumps and accessories.




Slogging Spanners for Large Nuts and Bolts

For use in tightening or loosening large nuts and bolts of the kind used in heavy industry, shipbuilding and similar areas. Suitable for use with striking hammers and pneumatic hammers.

Made of drop-forged tool steel with close-tolerance openings (DIN 475/DIN 691) for extra-heavy duty; steel gray, oiled.

All slogging spanners are also available in spark-suppressing hard bronze or copper-beryllium versions.
(Prices and supply time frames on inquiry.)


Open-end slogging spanners, type series 133 (DIN 133)



Art. No.	mm	L	a	b	kg	4021176	
133-24	24	170	15	55	0.42	867774	5
133-27	27	175	16	57	0.40	854804	5
133-30	30	195	17.5	69	0.82	854989	5
133-32	32	195	17.5	69	0.80	855061	5
133-36	36	195	17.5	69	0.78	855146	5
133-41	41	245	20	90	1.50	855221	1
133-46	46	245	20	90	1.40	855306	1
133-50	50	270	21	100	1.70	855481	1
133-55	55	310	24.5	115	2.70	855559	1
133-60	60	310	24.5	115	2.60	855634	1
133-65	65	340	27.5	125	3.50	855719	1
133-70	70	375	30	142	5.20	855894	1
133-75	75	380	30	142	5.10	855979	1
133-80	80	405	34.5	170	6.10	856051	1
133-85	85	410	34.5	175	7.00	856136	1
133-90	90	450	38.5	190	8.00	856211	1
133-95	95	450	39	195	8.80	856396	1
133-100	100	485	47	225	12.00	856471	1
133-105	105	500	47	225	13.00	865176	
133-110	110	500	47	225	12.80	865183	
133-115	115	525	52	245	19.90	865190	
133-120	120	525	52	245	19.70	865206	

Larger sizes and intermediate sizes also available.
Prices and supply time frames on inquiry


Ring slogging spanners, type series 406 (DIN 7444)



Art. No.	mm	L	a	b	kg	4021176	
406-24	24	180	16	47	0.51	856549	5
406-27	27	180	16	47	0.49	856624	5
406-30	30	185	16	51	0.48	856709	5
406-32	32	190	17	56	0.72	856884	5
406-36	36	195	19	58	0.68	856969	5
406-41	41	230	21.5	72	0.40	857041	1
406-46	46	235	22	74	1.30	857126	1
406-50	50	240	22.5	76	1.28	857201	1
406-55	55	270	26	94	2.80	857386	1
406-60	60	270	26.5	94	2.70	857461	1
406-65	65	280	28	100	2.50	857539	1
406-70	70	330	35	115	4.80	857614	1
406-75	75	330	35	115	3.40	857799	1
406-80	80	345	35	125	3.80	857874	1
406-85	85	380	38	140	5.10	857959	1
406-90	90	380	40	150	5.60	858031	1
406-95	95	380	42	150	6.40	858116	1
406-100	100	430	45	152	7.75	858291	1
406-105	105	430	47	175	9.70	858376	1
406-110	110	430	47	175	9.30	858451	1
406-115	115	430	47	175	8.50	858529	1
406-120	120	482	54	180	9.70	858604	1

Larger sizes also available.
Prices and supply time frames on inquiry

Flange Spreaders

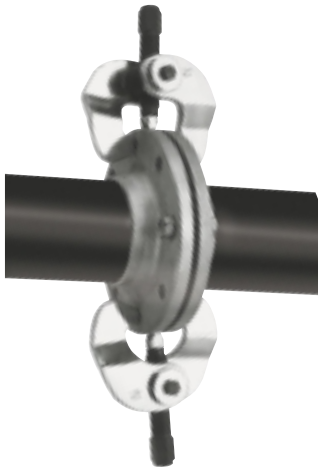

Flange spreaders, type series 160

This practical tool enables quick and safe separation of flanged pipe connections for replacing gaskets or performing other maintenance work.

Upon completion of the work, the flanges are returned precisely to their original positions.

Flange spreader for DIN flanges				for standard raised-face flanges (US)					
Art. No.	Qty.	Pipe size mm	With bolts	Cast iron 125 lb"	Steel 150 lb"	Cast iron 250 lb	Steel 300 lb	kg	4021176
160-1	2	80-250	M 16-M 24	2-20	2-20	1-12	3/4 -12	5.20	025273
160-2	2	250-1200	M 24-M 48	16-48	18-24	12-30	12-24	16.50	025358

Operation:

Always use in pairs.


Remove two bolts from opposite sides (180° apart) of the flanged connection.

Insert the retaining hooks of the flange spreader into the holes, and tighten the forcing screws just far enough to keep the tool in position.

Remove the remaining bolts from the flanged connection.

Simultaneously tighten both forcing screws to uniformly spread the flange halves far enough apart to allow unhampered working. (Always liberally oil the threads of the screws.)

Once the maintenance work has been completed, turn back the screws to uniformly reunite the two flange halves.

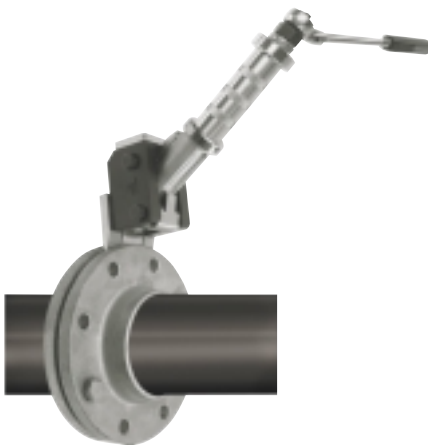

Universal flange spreader, type 165

This universal tool enables quick and safe separation of flanges and similar assemblies of all types and sizes.

An integrated, reversing ratchet handle facilitates operation of the spreader, so no wrenches or other auxiliary tools are needed, and no time-consuming direction-of-pull reversal is required for tensioning and relaxation.

Art. No.	Qty.	Spread range (max.)	Spreading force	kg	4021176
165-E	1	75 mm (3")	20KN (2 to)	6.10	491979

Operation:

First, remove the bolts from the flange. Then, insert the jaws of the spreader as far as possible in between the flange halves, and hold the spreader in position with one hand on the shaft. Use your other hand to ratchet the spreader far enough for it to hold itself in position.

Next, repeat the procedure on the other side of the flanged connection.


Once the other spreader is also tight enough to hold itself in position, spread the flange halves apart by alternately and uniformly tightening the screws of both spreaders.

Precautionary note:

Prior to actually beginning work, always take suitable measures to prevent accidents caused by flying and falling parts of the flanged connection (e.g., by providing supports or the like).

Flange spreaders are intended for use in pairs. Applying only a single spreader to one side of a flange exposes it to excess load and is liable to destroy the tool. The ratchet handle is sized for easy turning. If turning becomes difficult, check the spreader's seating, and adjust as necessary.

The use of extensions to strengthen the lever effect of the ratchet handle is inadmissible.

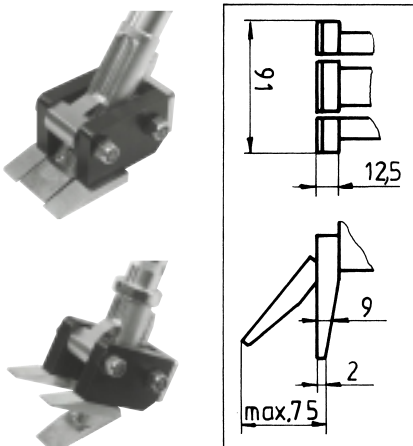



Special-purpose Automotive Tools



Battery terminal puller, type 48

One-hand automatic type for safe working in cramped spaces.

Art. No.	mm	mm	kg	Barcode
48	60 2 ³ / ₈	40 1 ⁵ / ₈	0.18	170539



Battery terminal puller, type 41-1

Basic model for pulling off battery terminals and other small parts

Art. No.	mm	mm	kg	Barcode
41-1	65 2 ⁹ / ₁₆	65 2 ⁹ / ₁₆	0.20	015038

For larger models, see page 33.




Electrician's/Battery terminal puller

Professional model with self-centering puller claws for use in removing small bearings, pinions, battery terminals and similar parts.

Universally applicable.

Art. No.	mm	mm	kg	Barcode
43-1	60 2 ³ / ₈	50 2	0.22	015458

For larger models, see page 23.



Clamp spring spreader, type 119-0 „VW“

For mounting and removing clamp springs on and from the spherical flanges of VW exhaust systems.

Art. No.	Suitable for	kg	Barcode
119-0	All 1979-1988 VW models	0.40	248368

The tool can be actuated either with a 17 mm (1¹/₁₆") socket wrench or a 3⁸/₁₆" recessed square drive.



Set of clamp spring tension wedges, type 119-1

This set of tension wedges facilitates mounting and removal of clamp springs on and from all VW exhausts in their various states of accessibility. As an added advantage, the wedges remain behind in the removed clamp spring, so no renewed spreading operation is necessary prior to remounting.

Art. No.	Comprising	kg	Barcode
119-1	1 tension wedge long (no. 119 01) 2 tension wedges short (no. 119 02)	0.60	365904

For method of operation, see VAG instructions.




Pullers for AUDI/VW cam wheels with 4 special-purpose claws

For pulling spoke-type cam wheels on TDI 4-, 6- and 8-cylinder diesel engines and on V6 and V8 gasoline engines from 1998 on.

The scope of supply includes 4 claws.

Art. No.	AUDI/VW	kg	Barcode
118-0	TDI (4/6/8 cyl.), V6, V8	1.20	860904

- A) 6-spoke wheels
B) 5-spoke wheels (4-/6-cylinder)
C) 5-spoke wheels (8-cylinder)



Special-purpose Automotive Tools



Oil seal installer, type 125

Suitable for all air-cooled VW engines.

Art. No.	kg	4021176
125	1.00	171604

Screw the tool into the crankshaft, and pull the oil seal into the crankcase by tightening the nut.



V-belt pulley puller, type 124

For all air-cooled VW engines.

Art. No.	kg	4021176
124	0.30	171529

This puller attaches in a single operation. Its claws press automatically up against the collar of the V-belt pulley.



Puller set for passenger car V-belt pulleys (incl. multi-groove pulleys) with diameters up to 195 mm, in metal case

This tool enables quick and easy pulling of particularly tight-fitting V-belt pulleys of all kinds off of crankshafts, even in cramped spaces.

Art. No.	kg	4021176
124-K	2.84	736841



Set comprising:

- 1 two-arm pulley puller for V-belts with diameters up to 132 mm and a tight-space pulling arm for depths up to 68 mm
- 2 pulling-arm extensions for depths up to 88 mm
- 2 holding screws for pulling-arm extensions
- 1 puller head for V-belt pulleys with boltholes
- 1 set (3 ea.) of forcing-screw pressure pads


Operation:

To pull a V-belt pulley without tapholes, slide the pulling arms in behind the pulley. The accompanying extensions enable accommodation of any and all working conditions (large head).

V-belt pulleys with diameters above 132 mm have tapholes sized M 8 or M 10, depending on the make. For any such pulley, the accompanying supplementary head accommodates standard M 8 or M 10 bolts of appropriate length (small head) that screw into the tapholes in the pulley. (The bolts are not included in the scope of supply.)

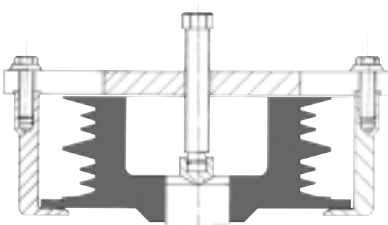

Special-purpose Automotive Tools

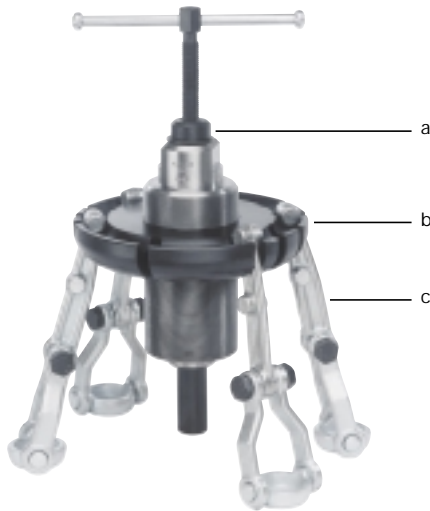

a) Hydraulic ram
b) Slotted disk
c) Pulling arm



Universal hydraulic hub pullers, type series 10

Universal application, immense pulling strength and easy operation are the main merits of these thoroughly tried & tested hub pullers.

The use of different-size slotted disks prevents damage to the wheel studs.

The swivel cup ends of the pulling arms also go easy on the wheel studs.

Guaranteed high performance and long service life

Operation:

First, mount the desired slotted disk on the hydraulic ram. Attach the pulling arms to the wheel studs and hook their other ends into the slotted disk. The pulling arms are designed for latching in at two different points, thus yielding two different lengths. Next, use a wrench to tighten the hydraulic ram firmly up against the axle and, finally, turn the bar handle on the head of the hydraulic ram to easily extract the hub.

Sets in metal cases

Art. No.	Contents of case		kg	4021178
10-A	1 hydraulic ram (20 tons)	No. 10-1	17.3	005626
	for passenger cars, 1 slotted disk A	No. 10-3		
	vans and light trucks; 6 pulling arms	No. 10-6		
	bolthole with			
	dia. up to 6 pairs of insert rings			
	250 mm (10")			
10-G	1 hydraulic ram (20 tons)	No. 10-1	24.0	005701
	for same vehicles 1 slotted disk A	No. 10-3		
	as 10-A, 1 slotted disk C	No. 10-5		
	plus heavy trucks; 7 pulling arms	No. 10-6		
	bolthole dia. up to with			
	350 mm (14") 7 pairs of insert rings			

Parts for pullers belonging to type series 10

Art. No.	Designation	kg	4021178
10-1	Hydraulic ram with 2 pressure pads	5.50	005213
10-3	Slotted disk A - 250 mm -	3.80	005398
10-5	Slotted disk C - 350 mm -	6.10	005473
10-6	Pulling arm (bolthole dia. 22 mm)	0.60	005541
143 006 11	Insert ring (bolthole dia. 14 mm)	0.10	
183 006 11	Insert ring (bolthole dia. 18 mm)	0.10	
810 000 17	35-mm pressure pad	0.13	
810 001 17	80-mm pressure pad	0.32	
10-ERS	Spare parts sets for type-10 pullers	1.10	244148
10-REP	Factory overhaul and reconditioning for type-10 pullers		237881




Mechanical universal hub pullers, type series 10

For truck wheel hubs with bolthole diameters up to 350 mm. Safe, accurate operation thanks to six extra-long, slip-proof, slot-controlled pulling arms. In case of a badly jammed hub, the head of the tightened forcing screw can be tapped with a hammer to free up the hub.

Art. No.	Bolthole diameter	Depth	kg	862311	Spare arm No.
10-M	350 mm	150 mm	12.60	862311	No. 10-6

The forcing screw no. 633350 can be replaced with a hydraulic ram no. 10-1 to obtain a hydraulic hub puller. (See above, 10-G)

Special-purpose Automotive Tools



Universal hub pullers, type 38

For passenger cars, vans and trucks with bolthole diameters up to 250 mm (10").

The swivel-mounted cups bear evenly on the hub, thus preventing damage to the wheel studs

Art. No.	Description	kg	4021178	626 180	mm
38	With 5 puller arms	5.50	014383	626 180	27

This hub puller is also available in a hydraulic version with 8 tons of pull (art. no. 38-B; price on inquiry).



Universal hub pullers, type series 40

A robust puller for passenger cars, vans and trucks with bolthole diameters up to 225 mm. **Impact/shock-resistant design**

The spindle rests in a self-aligning threaded bushing that protects the thread if hammer blows against the spindle head are required for dislodging the wheel hub.

Art. No.	Bolthole diameters up to 225 mm (9")	kg	4021178
40-3	With 3 pulling arms	4.20	014611
40-5	With 5 pulling arms	5.14	014956
40-3-1	Pulling arm for type-40 pullers	0.50	014796
40-3-8	Striking wrench for types 38 + 40	0.44	014871




Flange-type axle pullers, type 230

This tool is used for extracting flange axles with 4 or 5 studs on OPELS, FORDs, DATSUNs (ST-30000), AUDIs, VWs (POLOS, DERBYs, SCIROCCOs, PASSATs), NISSANs (SUNNYs, BLUEBIRDS, LAURELS, PATROLS, URVANs) and various other makes.

Once the puller has been attached, effect removal by means of sharp blows with the slide hammer.


Art. No.	For bolt dia.: mm	For bolthole dia.: mm	kg	4021178
230	4-14 1/8-1/2	100-150 4-6	3.8	031038



Special-purpose „VW“ puller with pressure pad

for pulling the inner races out of the front wheel hubs of VW and Audi vehicles (VAG: V 10.1).

Art. No.	kg	4021178
T-204-V	2.00	869662



Steering arm puller, type series 204

Also for use in pulling ball bearings, gears, pinions and similar parts. The clamp forces the arm tightly up against the part to be removed.




Art. No.	mm	mm	kg	4021178	mm
204-1	80 3 1/8	90 3 5/8	1.30	028243	19
204-2	100 4	100 4	2.00	028328	22
204-3	150 6	140 5 1/2	3.00	028403	24





Special-purpose Automotive Tools

135-1	c = 18 mm	129-0	c = 20 mm
135-2	c = 23 mm	129-1	c = 18-22 mm
135-3	c = 29 mm	129-2	c = 16-22-32 mm
135-4	c = 39 mm	129-3	c = 34 mm
135-5	c = 45 mm	129-3-A	c = 30 mm (ALU)
		129-4	c = 40 mm
		129-5	c = 36 mm
		T-129-6	c = 25-32-47 mm (UNIV.)
128-1	c = 18 mm	129-3-H	c = 34 mm 10 ton
128-2	c = 23 mm	129-4-H	c = 40 mm 15 ton
128-3	c = 29 mm	129-5-H	c = 36 mm 15 ton
128-4	c = 40 mm		
128-5	c = 46 mm		

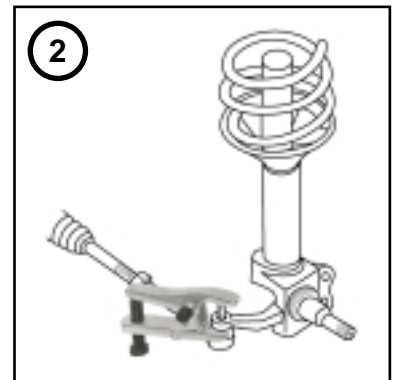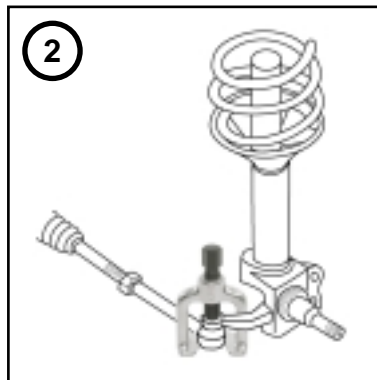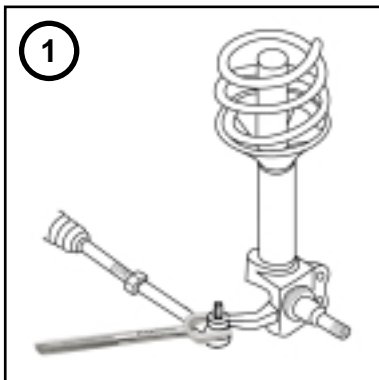

Fork separators, type series 135

These handy tools are frequently used instead of expensive special-purpose equipment. They greatly facilitate such front-axle jobs as: removing seized ball pin joints from tapered seats, removing steering-gear arms, removing shock absorbers and all other kinds of separating work.

Art. No.	Fork opening mm	kg	4021176
135-1	18 ²³ / ₃₂	0.75	024856
135-2	23 ¹⁵ / ₁₆	0.85	024931
135-3	29 ¹ / ₈	0.90	025013
135-4	39 ¹ / ₂	1.20	025198
135-5	45 ¹ / ₂	1.10	220531

Ball joint extractors, type series 128

For forcing out ball journals when removing ball-and-socket joints. Quick & simple action.

Art. No.	Height A mm	Width B mm	Opening C mm	kg	4021176	614 040	mm
128-1	38	36	18 ²³ / ₃₂	0.30	024108	614 040	17
128-2	48	45	23 ¹⁵ / ₁₆	0.50	024283	616 055	17
128-3	60	60	29 ¹ / ₈	1.00	024368	618 068	19
128-4	80	60	40 ¹ / ₂	1.60	024440	623 110	24
128-5	100	75	46 ¹ / ₂	1.80	024511	623 110	24




(Drop-forged steel)


Special-purpose Automotive Tools

Extractors for DIN ISO 7803 ball joints, type series 129

Universal type for passenger cars and light commercial vehicles

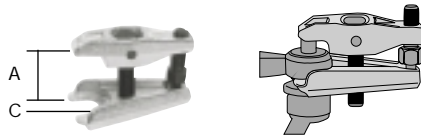

Art. No.	Opening C mm	"	For ball-joint sizes	Range A mm	"	kg	
129-1	18-22	$\frac{3}{4}$ - $\frac{7}{8}$	19-27 mm	50	2	0.75	024696




Special model for the following passenger-car makes:


AUDI, BMW, Fiat, Ford, Daimler-Chrysler, Nissan-Datsun, Opel, Toyota, VW, Volvo, Renault, Rover

Art. No.	Opening C mm	"	For ball-joint sizes	Range A (two-stage) up to: mm	"	kg	
129-0	20	$\frac{13}{16}$	27-30 mm	50	2	1.10	410536

Suitable for all passenger cars, commercial vehicles and medium-sized trucks




Art. No.	Opening C mm	"	For ball-joint sizes	Range A mm	"	kg	
129-2	16-22-32	$\frac{5}{8}$ - $\frac{7}{8}$ - $1\frac{1}{4}$	19-40 mm	70	$\frac{23}{4}$	1.20	024771



Special model for passenger cars with aluminum chassis


e.g., AUDI A6 and A8, 1999 models, BMW series 3 and 5, and other types of vehicles with confined connecting spaces

Art. No.	Opening C mm	"	For ball-joint sizes	Range A mm	"	kg	
129-3-A	30	$1\frac{3}{16}$	35 mm	65	$\frac{23}{16}$	2.0	862649



For medium-size trucks, busses and construction vehicles

Art. No.	Opening C mm	"	For ball-joint sizes	Range A mm	"	kg	
129-3	34	$1\frac{5}{16}$	35-40 mm	70	$\frac{23}{4}$	2.50	270949



For heavy trucks, busses and construction vehicles

Art. No.	Opening C mm	"	For ball-joint sizes	Range A mm	"	kg	
129-4	40	$1\frac{5}{8}$	50 mm	85	$\frac{33}{8}$	2.60	271021

For medium-size and heavy trucks, busses and special-purpose vehicles

Art. No.	Opening C mm	"	For ball-joint sizes	Range A mm	"	kg	
129-5	36	$1\frac{7}{16}$	40-50 mm	70	$\frac{23}{4}$	3.8	865084

(for universal truck ball-joint extractors, see page 72)

Hydraulic ball-joint extractor, types series 129-H

For medium-size trucks, busses and construction vehicles



Art. No.	Opening C mm	"	For ball-joint sizes	Range A mm	"	Capacity t	kg	
129-3-H	34	$1\frac{5}{16}$	35-40 mm	70	$\frac{23}{4}$	10 ton	4.1	803253

For heavy trucks, busses and construction vehicles



Art. No.	Opening C mm	"	For ball-joint sizes	Range A mm	"	Capacity t	kg	
129-4-H	40	$1\frac{5}{8}$	50 mm	85	$\frac{33}{8}$	15 ton	4.2	803666

For medium-size and heavy trucks, busses and special-purpose vehicles

Art. No.	Opening C mm	"	For ball-joint sizes	Range A mm	"	Capacity t	kg	
129-5-H	36	$1\frac{7}{16}$	40-50 mm	70	$\frac{23}{4}$	15 ton	4.6	865091





Special-purpose Automotive Tools



Extractor for DIN ISO 7803 ball joints

No. T-129-6 universal truck ball-joint extractor

with three interchangeable forcing forks for universal application to eccentric rods and tie rods on nearly all makes of vehicles, e.g., DAF, Iveco, MAN*, Mercedes, Skania, Volvo, etc.

Art. No.	Opening C	kg	Barcode
T-129-6	25-32-47 mm	9.20	871191

*application in accordance with MAN 80.99601-6005

Disk Brake Tools

Disk brake pad remover, type 123

This tool enables removal of seized brake pads from the fixed caliper of disk brakes.



Art. No.	Suitable for	kg	Barcode
123	Mercedes-Benz and other passenger car models with fixed caliper disk brakes	0.60	270789

Set of disk brake piston reset tools in metal case, push-back / turn-back unit

Including 6 adapters for universal accommodation of old- and new-model European and Japanese vehicles.



Art. No.		kg	Barcode	Box
126-20	9-piece, with 6 adapters	2.00	509636	1
126-30	10-piece, with 7 adapters	2.10	891656	1

Operation:


If the vehicle has brake calipers with integrated parking brake, reset the brake piston by turning it back; for all other vehicles, reset by pushing it back.

- 1) Pressure screw type 620-120
- 2) Guide bush type 126-200
- 3) Pressure plate type 126-201
- 4) Push-back adapter type 126-202
e.g., for corresponding models by VW-AUDI, SEAT, SKODA, FORD, BMW, MERCEDES, TOYOTA, NISSAN and MITSUBISHI
- 5) Turn-back adapter type 126-203
for models with 12 mm socket head caps screws, e.g., VW-AUDI, SEAT and SKODA
- 6) Turn-back adapter type 126-204
for e.g., VW-AUDI, SEAT, SKODA, FORD, VOLVO, ROVER (800), SAAB, JAGUAR (XJ6), PEUGEOT (405, 605), NISSAN-SUBARU
- 7) Turn-back adapter type 126-205
e.g., for MITSUBISHI, MAZDA, HONDA-Civic
- 8) Turn-back adapter type 126-206
e.g., for HONDA-Concerto, ROVER (200/400)
- 9) Turn-back adapter type 126-207
e.g., for Citroen
- 10) Turn-back adapter type 126-208
for Opel, e.g., Vectra and Astra (contained only in set no. 126-30)



Special-purpose Automotive Tools

Disk Brake Tools

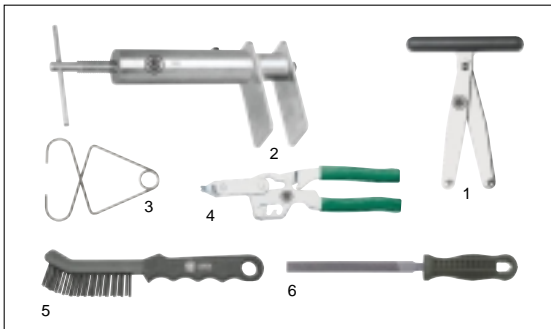

Complete set of brake caliper tools Assortment no. 126-10

Art. No.		kg	40211761	
126-10	6-piece	2.30	534966	1

The tools belonging to this set are also available individually.

Type 126-01

Brake pad extractor

Art. No.		kg	40211761	
126-01		0.10	496271	5

Type 126-00

Disk brake piston reset tool

for the controlled, safe, straight resetting of disk brake pistons on passenger cars, motorcycles and trucks with fixed-caliper disk brakes.

Art. No.		kg	40211761	
126-00		1.70	487774	1

Type 126-02

Brake piston clamp

facilitates retention of reset brake pistons with brake hose connected during installation or removal of the brake caliper.

Art. No.		kg	40211761	
126-02		0.06	496356	5

Type 126-03

Piston-rotating pliers, for precision adjustment of the piston face recess on disk brakes, and for turning back the piston in case of brake calipers with integrated parking brake. Note: The piston must always be turned back in the direction of the piston face recess setting (radial direction of rotation). Turning in the other direction would screw the piston out of its cylinder bore.

Art. No.		kg	40211761	
126-03		0.28	496431	1

Type 126-04

Brake caliper brush, wire bristle brush for cleaning rubbings off of the brake caliper when changing pads.

Art. No.		kg	40211761	
126-04		0.08	534881	5

Type 127

Brake caliper file

Art. No.	Cross section mm	Length of cut mm	Cut	kg	40211761	
127	15 x 5	150	coarse	0.10	492051	2



Special-purpose Automotive Tools



Safety spring compressors, type series 65 and 66

These safe, universal spring compressors, with their modest space requirements, are especially easy to handle and, thanks to their adjustable connection clip, can be used for most standard helical springs with diameters ranging from 110 to 180 mm. They therefore present an economical alternative to far more expensive, complicated models.

These tools are in compliance with the „German Safety Regulations of Vehicle Maintenance“ (ZH 1/454) of the relevant German employer's liability insurance association and, following successful testing, have been awarded the Equipment Safety Certificate with the „GS“ mark.

„Universal“ spring compressor, type series 65



This handy universal tool is for use in replacing helical springs, in the assembled or disassembled condition, on cars weighing up to 2000 kg.



Art. No.	Working range depth	Working range diametric capacity	kg	Load max.	Barcode
65-0	100-200 mm 4- 8"	110-180 mm 4 1/4-7"	2.5	2 to/20 kN	020636
65-1	100-300 mm 4-12"	110-180 mm 4 1/4-7"	2.8	2 to/20 kN	020711
65-2	100-400 mm 4-16"	110-180 mm 4 1/4-7"	3.1	2 to/20 kN	020896

Operation:

- 1) Adjust the connecting clip to the required helical spring diameter, and insert the pin to lock it in place.
- 2) Attach the claws of the spring compressor to the spring coils (normally, three coils are sufficient), and secure them against slippage by tightening the locking screws on the sides.
- 3) Compress or relax the helical spring by alternately and uniformly actuating both threaded spindles with the aid of hand tools (wrench, ratchet handle).

„MacPherson“ spring compressors, type series 66



The ideal tool for use in replacing helical springs with up to 2500 N spring force on dismantled „MacPherson“ (or other) strut assemblies of the kind used on VWs, AUDIs, BMWs, Porsches, DATSUNS, RENAULTs, VOLVOS, TOYOTAs, MAZDAs and numerous other makes.

Art. No.	Working range depth	Working range diametric capacity	kg	Load max.	Barcode
66-1	100-250 mm 4-10"	110-180 mm 4 1/4-7"	3.1	2.5 to/25 kN	020971
66-2	200-400 mm 8-16"	110-180 mm 4 1/4-7"	3.3	2.5 to/25 kN	170201
66-3*	100-400 mm 4-16"	110-180 mm 4 1/4-7"	4.2	2.5 to/25 kN	170386

*Type 66-3 consists of a type-66-2 spring compressor and two additional short threaded rods.

Operation:

- 1) Adjust the connecting clip to the required helical spring diameter, and insert the pin to lock it in place.
- 2) Attach the claws of the spring compressor to the spring coils (normally, three coils are sufficient). The three-point support ensures safe, quick operation.
- 3) Wrap a protective blanket (cf. page 92) around the strut assembly with the spring compressor attached.
- 4) Compress or relax the helical spring by alternately and uniformly actuating both threaded spindles with the aid of hand tools (wrench, ratchet handle).
For additional details on operation and use of these tools, please refer to the MacPherson manual entitled „MacPherson Strut“.




Special-purpose Automotive Tools

Stud pullers/inserters, type series 50

The knurled and grooved clamping wheel presses the stud tightly up against the internal serration.

During extraction, the stud is protected by the wrench and can not break off.


A particularly strong, practice-proven model is available for maximum stress & strain.



Art. No.	Working range mm	kg	mm	
50-1	5-10 $\frac{3}{16}$ - $\frac{3}{8}$	0.10	17	019258
50-2	8-19 $\frac{5}{16}$ - $\frac{3}{4}$	0.40	27	019333
50-3	18-25 $\frac{3}{4}$ -1	0.60	36	019418

„Economy“ stud pullers/inserters, type series 51


Handy „economy“ models





Art. No.	Working range mm	kg	mm	
51-1	5-10 $\frac{3}{16}$ - $\frac{3}{8}$	0.36	19	019586
51-2	8-19 $\frac{5}{16}$ - $\frac{3}{4}$	0.40	19	019661
51-3	18-25 $\frac{3}{4}$ -1	0.50	19	019746

Stud pullers/inserters, type 52

This model is characterized by a wide working range. With its knurled wheel arranged at the bottom, it takes a tight grip on short stud ends.



Art. No.	Working range mm	kg	mm	
52	5-19 $\frac{3}{16}$ - $\frac{3}{4}$	0.50	19	019821



Stud pullers/inserters, type series 53

This model can be used with a box or socket wrench even in very confined spaces.

Stud pullers/inserters, type series 53

Art. No.	Description	kg	
53	Set of stud pullers, 6 mm, 8 mm, 10 mm and 12 mm, in a plastic case	0.78	342233


Individual stud pullers/inserters



Art. No.	Size Ø mm	kg	mm	mm	
53-6	6	0.14	21	$\frac{1}{2}$ "	342318
53-7	7	0.15	21	$\frac{1}{2}$ "	878091
53-8	8	0.14	21	$\frac{1}{2}$ "	342493
53-10	10	0.22	21	$\frac{1}{2}$ "	342561
53-12	12	0.22	21	$\frac{1}{2}$ "	342646
53-16	16	0.30	21	$\frac{1}{2}$ "	388774



Special-purpose Automotive Tools

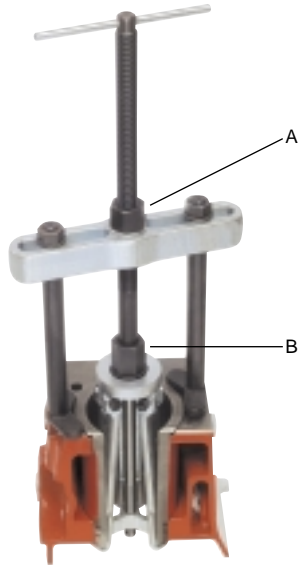

Cylinder liner puller, type 16

A universal tool for extracting wet cylinder liners, bushes, etc. Comes with three spreaders (stars) for expanding the pulling jaws. The spreaders screw into the lower end of the spindle and are interchangeable to accommodate different diameters.

Operation:

First, screw the spindle of the counterstay into nut **B** of the puller. Then, place the counterstay on the engine block, and insert the puller into the threaded bushing.

Next, tighten nut **B** to engage the lips of the spreaders under the rim of the cylinder liner.

Finally, pull the liner by tightening spindle nut **A**.

Complete puller with counterstay and spreaders.

Art. No.	mm		kg	
16	60-155	2 ⁷ / ₈ -6 ¹ / ₈	7.80	008023



Piston ring compressors, type series 100

For tensioning piston rings when fitting pistons and cylinders.

Art. No.	mm		mm		kg	
100-0	40- 75	1 ¹ / ₂ -3	50	2	0.13	428203
100-1*	57-125	2 ¹ / ₄ -5	80	3 ¹ / ₈	0.28	022203
100-2	90-175	3 ¹ / ₂ -7	80	3 ¹ / ₈	0.33	022388
100-3	90-175	3 ¹ / ₂ -7	165	6 ¹ / ₂	0.64	022463

* For Mercedes-Benz passenger cars and other makes.



Piston ring spreaders, type series 101

For spreading piston rings.

Art. No.	mm		mm		kg	
101-1*	50-100	2-4	200	8	0.25	022531
101-2	90-150	3 ¹ / ₂ -6	240	9 ¹ / ₂	0.37	022616

* For Porsche models 924, 944 and 928, all Daimler-Benz passenger cars and other models.



Piston pin drivers, type series 102

These tools enable easy, gentle removal and installation of piston pins without damage to the piston.

Art. No.	mm		Suitable for:	kg	
102-0*	38	1 ¹ / ₂	Motorcycle and other small engines	0.15	170874
102-1**	100	4	All automobile and motorcycle engines	0.15	022791

* Supplied with two supplementary pressure pads

** Supplied with three supplementary pressure pads

Special-purpose Automotive Tools



Valve lifter, type 103-1

With straight jaws

Art. No.	mm		kg	
103-1	70-230	2 ³ / ₄ -9 ¹ / ₈	1.20	022876

For small passenger cars.



Valve lifter, type 103-2

With straight and curved jaws

Art. No.	mm		kg	
103-2	40-230	1 ⁵ / ₈ -9 ¹ / ₈	1.35	022951

Standard model for small and medium-size passenger cars, e.g., BMW 316 and 318, FORD Fiesta and Escort, FIAT Panda, Uno and Tipo, etc.



Valve lifter, type 103-3

With straight and curved jaws

Art. No.	mm		kg	
103-3	85-290	3 ³ / ₈ -11	3.25	023378

For large passenger cars and light commercial vehicles.



Strap wrench, type 104

Strap wrenches are useful wherever other wrenches are unsuitable due to the shape, surface finish, stability, etc. of the item to be fitted or removed.

The nonslip rubber fabric strap accommodates circular screw unions and sundry other shapes to ensure a slip-proof fit.

Art. No.	Noose range mm	kg	
104	180 7	0.28	023606



Oil filter wrenches, type series 105

With adjustable steel belt for oil filters and similar round parts.

Art. No.	Girth range mm	kg	
105-0*	70-110 2 ³ / ₄ -4 ³ / ₈	0.32	023860
105-1**	70-110 2 ³ / ₄ -4 ³ / ₈	0.22	175749

* Type 105-0 with sturdy handle for fast working

** Type 105-1 with space-saving 1/2" square recess for working in extremely confined spaces



Oil filter wrench, type 108

Extremely strong, robust oil filter prong wrench - patented American version - with profiled prongs for heavy-duty application. Universally employable, even in poorly accessible places. Accepts hexagon-insert and hexagon-socket wrenches.

Art. No.	Diametric capacity mm			kg	
108-1	65-120 19	3/4	3/8	0.32	760426





Special-purpose Automotive Tools



Steering wheel pullers, type series 31

Extremely powerful tool for maximum loads.

Art. No.	For steering-column diameters of:		kg	4021176	621 210	mm
	mm	"				
31-1*	30-60	1 ¹ / ₄ -2 ³ / ₈	5.34	013881	621 210	22
31-2**	80-90	3 ¹ / ₄ -3 ¹ / ₂	5.00	013966	621 210	22

* With 5 interchangeable insert rings

** With 1 interchangeable insert ring




Steering wheel pullers, type series 32

For steering wheels with three or four spokes.

With two rings - 1 x 100 mm and 1 x 150 mm diameter.

The pull rings have sliding rubber sleeves for protection.

Art. No.	Description	mm	kg	4021176	614 135	mm
32-1	Light model	100 mm	1.70	014048	614 135	17
32-2	Heavy model	120 mm	2.30	014123	618 175	19



Steering wheel puller, type 33

For OPELs and other passenger vehicles with narrow pulling slots.

With 1 pair of short pulling arms for sports car style steering wheels, and 1 pair of long pulling arms for standard type steering wheels, incl. a protective cap for the threads of the pitman arm

Art. No.	kg	4021176	614 135	mm
33	0.76	014208	614 135	17



Universal steering wheel puller, type series 34

for new-model steering wheels with ample pulling slots (Opel, GM and various other passenger vehicles).

Including a protective cap for the threads of the pitman arm.


Type 34-0, model **GM 3**

with 1 pair of **short** pulling arms (87 mm), e.g., for Opel Vectra B and Opel Astra F

Type 34-1, universal model

with 1 pair of **short** pulling arms (87 mm; see above) and 1 pair of **long** pulling arms (135 mm), e.g., for Opel Frontera

Art. No.	mm	kg	4021176	614 134	mm
34-0	35-90	0.80	865879	614 134	17
34-1	35-90	0.65	865886	614 134	17

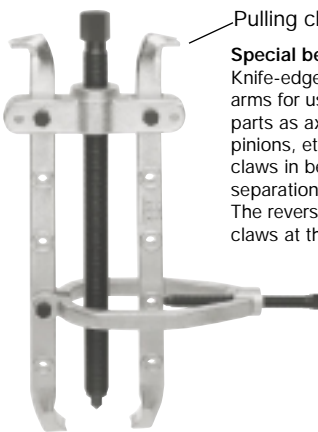

Pulling claw

Special benefits:

Knife-edge claws at one end of the pulling arms for use in loosening such close-fitting parts as axle bearings, ball bearing races, pinions, etc. The side clamp pushes the claws in behind such parts to allow their separation and extraction. The reversible arms have normal pulling claws at the other end.



Separating claw

Separating pullers, type series 210

For a wide range of applications in which ordinary pullers would not be suitable.

With particularly space-saving arms for work in confined spaces.

Art. No.	mm	mm	mm	kg	4021176	621 210	mm	
210-1	95	3 ³ / ₄	170	6 ³ / ₄	2.60	030383	621 210	22
210-2	135	4 ³ / ₈	270	10 ⁵ / ₈	4.30	030468	623 325	24
210-3	150	6	325	12 ¹ / ₈	4.80	030536	623 325	24

Special-purpose Automotive Tools



Set of universal automotive repair shop tools in metal case

Art. no.		kg	
K-65-A	Set of universal automotive repair shop tools	17.80	412851

Contents


Type 65-1	Safety spring compressor	↔ 180 mm	↑ 300 mm
Type 129-0	Ball joint extractor	C 20 mm	↑ 50 mm
Type 135-1	Fork separator	C 18 mm	↑
Type 210-1	Separating puller	↔ 95 mm	↑ 170 mm
Type 230	Flange-type axle puller		
Type T-087-2	Dead blow mallet (0.70 kg)		
Type T-123-2	Special lever iron* (400 mm x 14 mm)		

* For use in prying off cylinder heads and gears, inserting and removing ball bearings, freeing up rusty parts and similar operations.

Trailer Tools

Pullers for brake linkage adjusters

For use in pulling jammed adjusters off of self-adjusting brake systems on truck trailers and semi-trailers

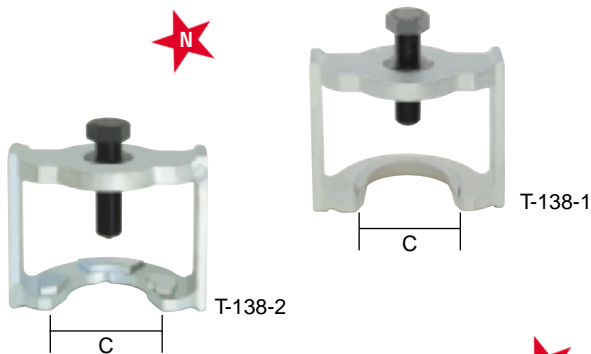

Art. no.	Suitable for the axles of:	Type of support:	Opening C	kg	
T-138-1	SAF/HALDEX	annular	64 mm	2.80	869587
T-138-2	BPW/Berg. axles	3 segments	64 mm	2.90	869594

To prevent damage and accidents, the puller's threaded bushing has a shear device that safeguards the puller in case of effective forces that would suffice to cause permanent deformation. (Spare threaded bushing: order no. 13810020)

Drivers for brass bushes in trailer tow bars

For driving worn, jammed brass bushes out of tow-bar eyes



Art. no.	For bushes:	kg	
T-140-1	30 x 36 x 100 mm	1.20	869617
T-140-2	28 x 34 x 80 mm	0.90	869624

Installers for brass bushes in trailer tow bars

For easy, gentle installation of new bushes in tow-bar eyes



Art. no.	For bushes:	kg	
T-141-1	30 x 36 x 100 mm	1.00	869631
T-141-2	28 x 34 x 80 mm	0.70	869648

Mounting tools for rubber steel bushes

For installing and removing rubber steel bushes in the spring eyes of pneumatic-spring axles, the tie rods of VB units, rollbar and square anti-sway bars, and the like



Art. no.	For bushes:	kg	
T-142-1	∅ 50-60 mm	3.50	869655







Special-purpose Automotive Tools

Pullers for Bearings in Passenger Cars



Bearing pullers for BMW models

Art. no.	Nomenclature:	Application range:	
T-073-1	Tool set	BMW bearing puller set comprising:	839313
T-GG-58	Basic tool	Type 58, accommodates the following grippers: 	
T-G-581	Gripper	for 4-speed countershaft bearings	6304/7
T-G-582	Gripper	for 5-speed countershaft bearings	6305/7
T-GG-83	Basic tool	Type 83, accommodates the following grippers:	
T-G-831	Gripper	for differential pinion bearings	89449
T-G-832	Gripper	for the inner race in the differential housing	503349



Bearing pullers for DaimlerChrysler

Art. no.	Nomenclature:	Application range:	
T-073-2	Puller Factory serial no.	RILLEX for 530265/7 bearings DB 123 589 023300	864889
T-073-4	Tool set	Set of pullers for Mercedes bearings, comprising:	839498
T-GG-48	Gripper	Type 48, accommodates the following gripper: 	
T-G-481	Gripper	for transmission-output and drive shaft, type W 201 and W 124	11949
T-GG-58	Basic tool	Type 58, accommodates the following grippers:	
T-G-586	Gripper	for countershaft, front type W 124, 5-speed (G 1/18-5)	1380
		and countershaft, rear in 717,45 transmissions	
T-G-587	Gripper	for countershaft, rear in G1/17 transmissions	32006X
		and countershaft, front in G 1/18-4, G 1/18-5 transmissions	
T-GG-70	Basic tool	Type 70, accommodates the following grippers:	
T-G-701	Gripper	for countershaft, front in G1/ 18-4 and 18-5 transmissions	30305
T-G-702	Gripper	with extension for drive shaft bearings, type W 201 and W 124	14124





Special-purpose Automotive Tools

Pullers for Bearings in Passenger Cars





Bearing pullers for Ford models

Art. no.	Nomenclature:		
T-073-5	Tool set	Set of Ford bearing pullers, comprising:	839726
T-GG-58	Basic tool	accommodates the following grippers:	
T-G-587	Gripper	for bearings in the automatic transmission	32006X
T-G-588	Gripper	for bearings in rear axles type B, D, F, H, K	331699/ 11440373
T-G-589	Gripper	for bearings in rear axles type A und E	331139
T-G-590	Gripper	for bearings in the manual gearbox	NJ 2205
T-G-591	Gripper	for inner races in automatic transmissions	
T-G-592	Gripper	for bearings in front axles	SKF 328227
T-GG-70	Basic tool	accommodates the following gripper:	
T-G-703	Gripper	for bearings in rear axles type C and J	M 88043



Bearing pullers for VW/AUDI/SEAT/SKODA models

Set of VAG special-purpose bearing pullers

Art. no.	Nomenclature:		
T-073-6	Tool set	Set of special-purpose VAG bearing pullers, comprising:	839566
T-GG-58	Basic tool (VVA 930 200)	Type 58, accommodates the following grippers:	
T-G-581	Gripper (VVA 930 300)	for bearings in manual gearboxes 014 and 081 (Passat, Golf, Scirocco, Polo, AUDI 50/80/100)	6304/7
T-G-582	Gripper (VVA 930 500)	for bearings in manual gearboxes 015/083/088 (LT 28-35, Porsche 924, AUDI 100 up to 1988)	6305/7
T-G-583	Gripper (VVA 930 900)	for bearings in manual gearboxes 014/II (AUDI 80 GT, AUDI 100 from 1977, Passat GTI)	FAG 533365/6 SKF 362379
T-G-584	Gripper with extension	for rear-axle bearings (type 1, 2, 3, 181)	6306/8
T-G-585	Gripper with extension	for rear-axle bearings (type 1, 2, 3, 181 older models)	6306/7







Special-purpose Automotive Tools

Pullers for Bearings in Passenger Cars



VAG special-purpose pullers for bearings in manual gearbox 084

Art. no.	Nomenclature:		
T-073-7	Pullers	for bearings in VAG 084 transmissions, comprising	839641
T-GG-70	Basic tool	Type 70, accommodates the following gripper: 	
T-G-701	Gripper	for bearings in manual gearbox 084 (Golf, Scirocco, Polo, AUDI 80)	30305

Set of VAG standard bearing pullers -factory version-







Art. no.	Nomenclature:		
T-074-1	Tool set	Set of pullers for VAG standard bearings, comprising:	839801
T-1582G	Basic tool (Z 411 142 WE)	accommodates the following grippers: 	
T-15821	Gripper (Z 411 143 WE)	for bearings in the final drive, with (Golf) Syncro gearbox	32010X
T-15822	Gripper (Z 411 148 WE)	for drive-shaft bearings in manual gearbox 012 (AUDI 80, A 4, A 6)	563466 FAG
T-15823	Gripper (Z 411 149 WE)	for countershaft bearings in manual gearbox 02A (Passat)	300849
T-15824	Gripper (Z 411 150 WE)	for large pinion bearing in manual gearbox 02A, S1 + S2 (Passat)	29749
T-15825	Gripper (Z 411 151 WE)	for small pinion bearing in manual gearbox 02A (Passat)	518772
T-15826	Gripper (Z 411 152 WE)	for pinion bearings in automatic transmission 097 (AUDI 90/100/200)	89449
T-15827	Gripper (Z 411 156 WE)	for countershaft bearings in manual gearbox 084 or 085	521425
T-15828	Gripper (Z 411 157 WE)	for inner race in differential casing, automatic transmission 098 (T 4)	503349
T-15829	Gripper (Z 411 159 WE)	for inner race in automatic transmission gearbox 098 (T 4)	32017X
T-15830	Gripper (Z 411 160 WE)	for deep-groove ball bearing of flanged shaft, right, in AG 4 transmission	16006



Needle bearing extractors, types 21-40 through 21-46


(For removing needle bearings from motor vehicle crankshafts, crankcases, etc. (cf. page 40 for operation).)

Summary table	Matching puller
Make/Model	
VW, all except Audi	21-43
Audi 100	21-44
OPEL, all except Kadett	21-43
OPEL Kadett	21-41
FORD, all in-line engines	21-43
FORD, all V engines	21-40
BMW, all	21-41
Mercedes Benz (ball bearing)	
all with manual transm.	21-43
PORSCHE 928 (ball bearing)	21-43



Art. no.			Fits bearing for shaft diameters of:				
	mm	"	mm	"			
21-40	9,6-18	$\frac{3}{8}$ - $\frac{3}{4}$	10	$\frac{3}{8}$	0,22	411526	22-1-22-2
21-41	11,5-19	$\frac{29}{64}$ - $\frac{3}{4}$	12	$\frac{1}{2}$	0,22	186066	22-1-22-2
21-42	12,5-21	$\frac{1}{2}$ - $\frac{55}{64}$	14	$\frac{9}{16}$	0,22	186141	22-1-22-2
21-43	14,5-22	$\frac{37}{64}$ - $\frac{7}{8}$	15+16	$\frac{5}{8}$	0,22	186226	22-1-22-2
21-44	16,5-23	$\frac{21}{32}$ - $\frac{59}{64}$	17+18	$\frac{3}{4}$	0,23	186301	22-1-22-2
21-45	18,5-24	$\frac{47}{64}$ - $\frac{61}{64}$	20	$\frac{13}{16}$	0,23	186486	22-1-22-2
21-46	20 -25	$\frac{51}{64}$ -1	22	$\frac{7}{8}$	0,23	186554	22-1-22-2

(For matching type-22 counterstays, see page 40.)


Automotive Workshop Tool Sets

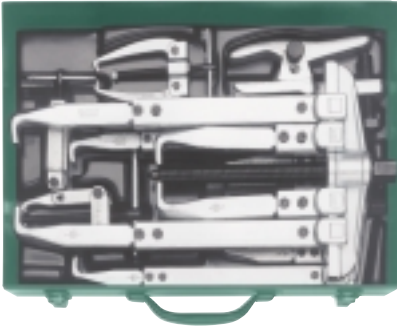



Set of pulling tools for passenger cars, in metal case

Art. no.		 kg	
K-20204	Set of universal pulling tools for passenger cars	13.20	744433

Contents			
Type 20-10	2-arm puller	↔ 120 mm	↓ 100 mm
Type 1-91-P	Pulling arm with claws		↓ 100 mm
Type 1-250-P	Long pulling arm		↓ 250 mm
Type 20-2	2-arm puller	↔ 160 mm	↓ 150 mm
Type 2-300-P	Long pulling arm		↓ 300 mm
Type 204-0	Bearing puller	↔ 50 mm	↓ 70 mm
Type 129-0	Universal ball joint extractor	C 20 mm	↓ 50 mm
Type 43-1	Small-parts puller	↔ 60 mm	↓ 50 mm

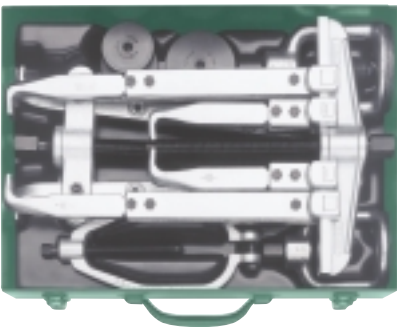

Set of pulling tools for trucks, in metal case

Art. no.		 kg	
K-20210	Set of pulling tools for trucks	16.60	744501

Contents			
Type 20-20	2-arm puller	↔ 200 mm	↓ 150 mm
Type 2-300-P	Long pulling arm		↓ 300 mm
Type 210-2	Separating puller	↔ 135 mm	↓ 270 mm
Type Y-09-17	Step plate adapter	44/54 mm	
Type Y-10-17	Step plate adapter	48/60 mm	
Type Y-14-17	Step plate adapter	60/73 mm	
Type 128-3	Ball joint extractor	C 29 mm	(60 x 60 mm)
Type 128-4	Ball joint extractor	C 40 mm	(80 x 60 mm)

Merchandisers



A full stand-alone sales dispenser, type „Product array“

KUKKO stand-alone sales dispensers are 1.00 m wide by 2.20 m high and can be lengthened at will with add-on elements. These perforated-panel elements are freestanding, and both sides can be used for display purposes. For use as two-sided sales dispensers, they require three large (0.5 x 1 m) and two small (0.3 x 1 m) supplementary perforated-plate panels.

The perforated-plate panels are made of 1.5-mm sheet steel.


An available assortment of tool-mounting hooks fit into the holes.

The base, which gives the wall its stand-up stability, offers a 1 meter long by 470 mm deep display deck.

A box sign integrated into the trim ensures good illumination and high attention value. The box sign is equipped with plug and socket for connection to the dispenser wall.

The approximately 2.5 m long mains power connecting cable with right-angle connector belongs to the stand-alone element's scope of supply.

KUKKO add-on elements are identical to the stand-alone element, except that they come with a single post, a single leg and no connecting cable, because each element attaches to the next. Thus, any add-on element can be converted to a stand-alone element by adding the appropriate parts.

Art. no.	Description	
EVLW-1	Stand-alone element (no tools)	448911
AVLW-1	Add-on element (no tools)	449093



Pulling and Extracting Tools with Hydraulic Rams Pressure Range 5, 10, 20, 30 and 50 Tons



These sturdy hydraulic pullers will solve practically any conceivable pulling problem while considerably improving productivity in repair shops and industrial facilities. They facilitate heavy manual labor and minimize lost repair time and machine outages. By exerting a precisely defined hydraulic force, they enable careful, gentle application, frequently eliminating the need for time-consuming, expensive spare-parts procurement.


Performance data: Correspond with the maximum rated force and are adaptable to sundry conditions of use, safety requirements and operating instructions.

10 kN = 1 Mp = 1 t.


Dimensions: Stated subject to change without notice in the interest of technical progress.

Weights: Quoted weights are average weights and therefore non-binding.

* Sliding plates are always arranged on the side opposite the ram.

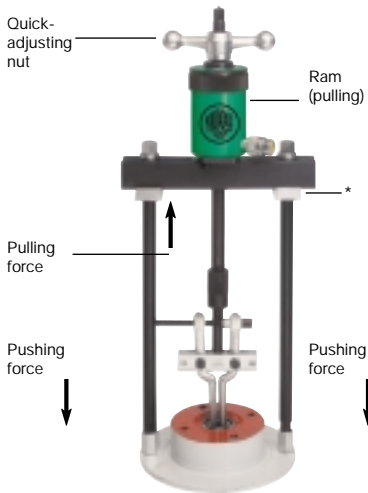

Type-Y28-180 pulling tool with type Y-221-E internal extractor

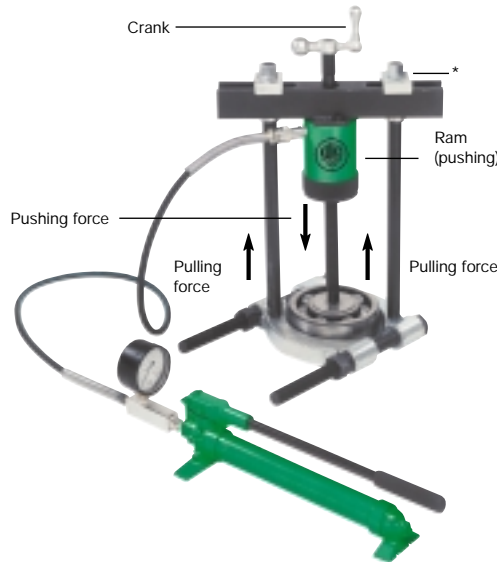

Type-Y38-180 pulling tool with type Y-315-5 separator and type-YHP-325 hand pump




Three-arm puller, type Y-38-206



Prior to applying any pulling force, wrap the pulling tool and the part to be pulled in a KUKKO protective blanket (see page 92).

Three-arm Pullers with Hydraulic Rams-Pressure Range 5 and 10 Tons

Three-arm pullers, type series Y08-208 and Y18-208



The heads of these pullers can be used with three arms or two. Fitted with two arms, these pullers can be used together with separating devices (see top left illustration). Accordingly, they have an extremely versatile range of application for pulling gear wheels, pulleys, ball bearings, etc. The heads have female threads to accommodate the collar thread of the hydraulic ram.

Prior to applying any pulling force, wrap the pulling tool and the part to be pulled in a KUKKO protective blanket (see page 92).

Choice of separators

To match puller type: Separator type:

- Y08-208 15-1, 15-2, 17-1, 17-2
- Y18-208 15-3, 17-3, 15-4, 15-5

Pullers with hydraulic rams

Art. no.	mm		"		Capacity		Ram stroke		kg	4021176	Complete with ram type
	mm	"	mm	"	Ton.	kN	mm	-			
Y08-208	250	10	215	8 1/2	4.5	45	125	5	4.7	461774	YRE-050
Y18-208	500	20	500	20	10	100	250	10	18.8	461699	YRE-101

Pullers without hydraulic rams

Art. no.	Without ram	Standard threads	kg	4021176
Y05-208	Puller only	1 1/2" - 16 UN	3.0	172366
Y10-208	Puller only	2 1/4" - 14 UNS	11.8	172441

Pullers for combination with hydraulic rams of different make


Art. no.	Threads	For use with hydraulic rams by:	kg	4021176
Y05-207	M 40 x 1,5	Raripress	3.0	035586
Y05-208	1 1/2" - 16 UN	Enerpac, OTC, Powerteam, NIKE	3.0	172366
Y10-207	M 60 x 1,5	Raripress	11.8	035746
Y10-208	2 1/4" - 14 UNS	Enerpac, OTC, Powerteam, NIKE	11.8	172441



Push/Pull Devices with Accessories

10 kN = 1 Mp = 1 t

20 tons max.

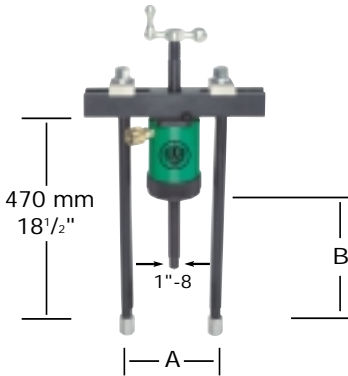


Type Y28-180 (19.5 kg)
Hydraulic push/pull device with hydraulic ram, crank, forcing screw, additional pressure pad YDB-27E and quick-adjusting nut.

Type Y20-180 (9 kg)
Push/pull device without hydraulic ram, crank, forcing screw, **without** additional pad, **without** quick-adjusting nut.


Spread max. (A)	Reach max. (B)
135-300 mm 5 1/4" - 11 3/4"	300 mm 12"

Type Y-221-E (2.20 kg)
Internal extractor




A
30-180 mm 1 1/4" - 7"

Legs*

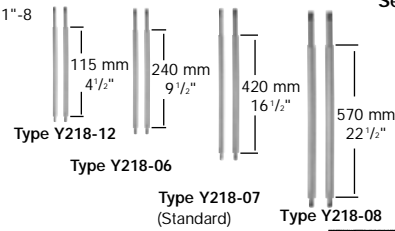


Type Y-215-2 (2 Kg)
Type Y-215-3 (5 Kg)
Type Y-215-4 (12 Kg)
Separators



No.	Y-215-2	Y-215-3	Y-215-4
A	22-115 mm 7/8" - 4 5/8"	25-155 mm 1" - 6 1/4"	30-200 mm 1 1/4" - 8"
B	115 mm 4 5/8"	152 mm 6"	200 mm 8"

For load levels, see page 89.

30 tons max.

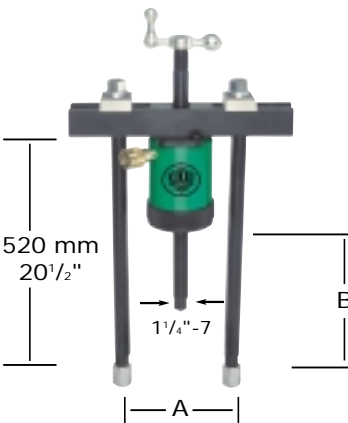


Type Y38-180 (38 kg)
Hydraulic push/pull device with hydraulic ram, crank, forcing screw, additional pressure pad YDB-33E and quick-adjusting nut.

Type Y30-180 (21 kg)
Push/pull device without hydraulic ram, crank, forcing screw, **without** additional pad, **without** quick-adjusting nut.


Spread max. (A)	Reach max. (B)
180-420 mm 7" - 16 3/4"	330 mm 13"

Type Y-321-E (6.50 kg)
Internal extractor




A
75-230 mm 3" - 9"

Legs*




Type Y-315-4 (12 Kg)
Type Y-315-5 (20 Kg)
Separators



No.	Y-315-4	Y-315-5
A	30-200 mm 1 1/4" - 8"	30-250 mm 1" - 10"
B	200 mm 8"	250 mm 10"

For load levels, see page 89.

50 tons max.

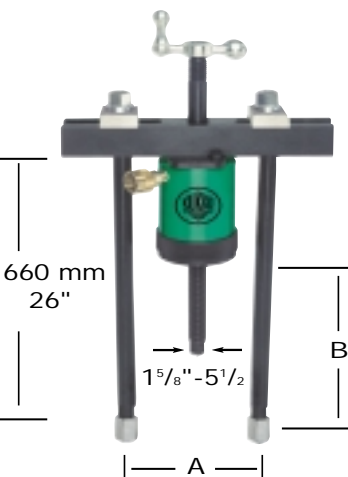


Type Y58-180 (82 kg)
Hydraulic push/pull device with hydraulic ram, crank, forcing screw, additional pressure pad YDB-55E and quick-adjusting nut.

Type Y50-180 (40 kg)
Push/pull device without hydraulic ram, crank, forcing screw, **without** additional pad, **without** quick-adjusting nut.


Spread max. (A)	Reach max. (B)
235-540 mm 9 3/4" - 21"	400 mm 16"

Type Y-521-E (6.70 kg)
Internal extractor




A
75-230 mm 3" - 9"

Legs*



Type Y-515-5 (20 Kg)
Type Y-515-6 (36 Kg)
Type Y-515-7 (43 Kg)
Separators




No.	Y-515-5	Y-515-6	Y-515-7
A	30-250 mm 1" - 10"	75-330 mm 3" - 13"	80-420 mm 3" - 16 3/4"
B	250 mm 10"	330 mm 13"	420 mm 16 3/4"

For load levels, see page 89.

Two-arm and three-arm pullers

20 tons max.



Type Y28-205 (20.5 kg)
Two-arm puller
 with hydraulic ram, crank, and forcing screw

Type Y20-205 (11 kg)
Two-arm puller without hydraulic ram, crank, and forcing screw

This puller can also be used with separator **Type Y-215-3**

(See top photo, page 85.)


Spread max. (A)	Reach max. (B)
420 mm 16"	300 mm 12"

For load levels, see page 89.

Type Y28-206 (27.5 kg)
Three-arm puller with hydraulic ram, crank, forcing screw and additional twin head




Type Y20-206 (16 kg)
Three-arm puller without hydraulic ram, crank, without forcing screw, without additional twin head



Spread max. (A)	Reach max. (B)
500 mm 20"	300 mm 12"

30 tons max.

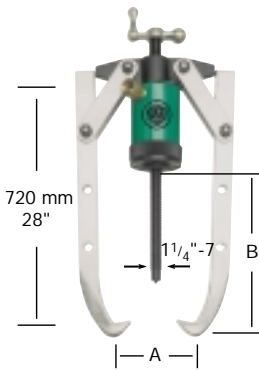

Type Y38-205 (39 kg)
Two-arm puller
 with hydraulic ram, crank, and forcing screw

Type Y30-205 (25 kg)
Two-arm puller without hydraulic ram, crank, and forcing screw

This puller can also be used with separator **Type Y-315-5**

(See top photo, page 85.)


Spread max. (A)	Reach max. (B)
700 mm 26"	520 mm 20"

For load levels, see page 89.

Type Y38-206 (58 kg)
Three-arm puller with hydraulic ram, crank, forcing screw and additional twin head




Type Y30-206 (40 kg)
Three-arm puller without hydraulic ram, crank, without forcing screw, without additional twin head

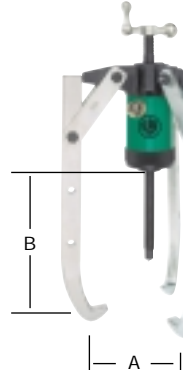

Spread max. (A)	Reach max. (B)
900 mm 34"	520 mm 20"

50 tons max.

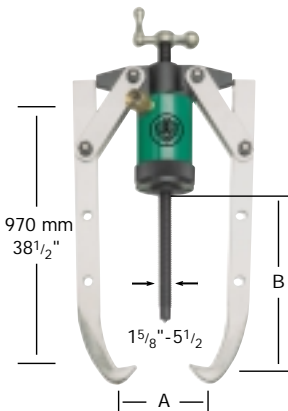

Type Y58-205 (88 kg)
Two-arm puller
 with hydraulic ram, crank, and forcing screw

Type Y50-205 (50 kg)
Two-arm puller without hydraulic ram, crank, and forcing screw

This puller can also be used with separators **Type Y-515-6** and **Y-515-7**
 (See top photo, page 85.)


Spread max. (A)	Reach max. (B)
1000 mm 36"	700 mm 27 5/8"

For load levels, see page 89.

Type Y58-206 (123 kg)
Three-arm puller with hydraulic ram, crank, forcing screw and additional twin head



Type Y50-206 (80 kg)
Three-arm puller without hydraulic ram, crank, without forcing screw, without additional twin head

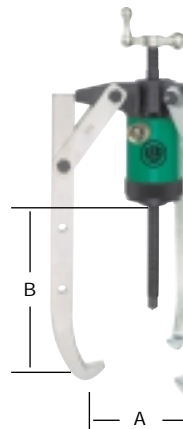

Spread max. (A)	Reach max. (B)
1200 mm 44"	700 mm 27 5/8"



Sets of Hydraulic Push/Pull Devices in Metal Cases



The strong metal cases simplify transport to and from the site and enable orderly, space-saving storage.

Set of universal hydraulic push/pull devices

	20 ton	30 ton	50 ton
Art. no.	Y28-200	Y38-300	Y58-500
	83 kg	188 kg	335 kg
	302541	302626	302701

comprising:

Hollow ram

with threaded pusher pad	YRH-202	YRH-302	YRH-603
adjusting spindle	Y218-11	Y318-11	Y518-11
crank	Y218-10	Y318-10	Y518-10

Hand pump

with pressure gauge and hose	YHP-325	YHP-325	YHP-325
------------------------------	---------	---------	---------

Pulling tool

2 ea. extra legs	Y218-06	Y318-36	—
2 ea. extra legs	Y218-08	Y318-38	Y518-08
2 ea. leg connectors	Y218-31	Y318-41	Y518-31

Separator

	Y-215-3	Y-315-5	Y-515-6
--	---------	---------	---------

Inside puller

pressure pad with smooth bore	YDB-27E	YDB-33E	YDB-55E
-------------------------------	---------	---------	---------

Quick-adjusting nut

	Y218-33	Y318-33	Y518-33
--	---------	---------	---------

Puller, three-arm

head, two-arm	Y20-206	Y30-206	Y50-206
	Y205-20	Y305-20	Y505-20



Hydraulic pulling-tool sets

	20 ton	30 ton	50 ton
Art. no.	Y28-218	Y38-318	Y58-518
	54 kg	120 kg	203 kg
	036651	037641	038891

comprising:

Hollow ram

with threaded pusher pad	YRH-202	YRH-302	YRH-603
adjusting spindle	Y218-11	Y318-11	Y518-11
crank	Y218-10	Y318-10	Y518-10

Hand pump

with pressure gauge and hose	YHP-325	YHP-325	YHP-325
------------------------------	---------	---------	---------

Pulling tool

2 ea. extra legs	Y218-06	Y318-36	—
2 ea. extra legs	Y218-08	Y318-38	Y518-08
2 ea. leg connectors	Y218-31	Y318-41	Y518-31

Separator

	Y-215-3	Y-315-5	Y-515-6
--	---------	---------	---------

Inside puller

pressure pad with smooth bore	YDB-27E	YDB-33E	YDB-55E
-------------------------------	---------	---------	---------

Quick-adjusting nut

	Y218-33	Y318-33	Y518-33
--	---------	---------	---------



Hydraulic wheel-puller sets

	20 ton	30 ton	50 ton
Art. no.	Y28-256	Y38-356	Y58-556
	46 kg	96 kg	175 kg
	036811	037801	038631

comprising:

Hollow ram

with threaded pusher pad	YRH-202	YRH-302	YRH-603
adjusting spindle	Y218-11	Y318-11	Y518-11
crank	Y218-10	Y318-10	Y518-10

Hand pump

with pressure gauge and hose	YHP-325	YHP-325	YHP-325
------------------------------	---------	---------	---------


Puller, three-arm

head, two-arm	Y20-206	Y30-206	Y50-206
	Y205-20	Y305-20	Y505-20




Spare Parts for Pulling Tools with Hollow Rams

10 kN = 1 Mp = 1 t

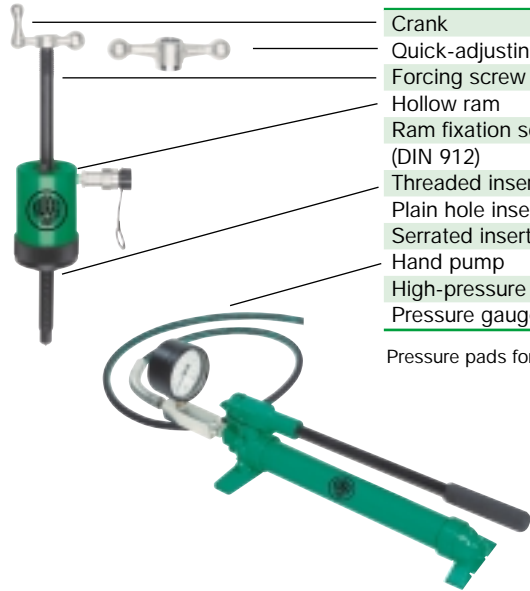

Description	20 tons	kg	30 tons	kg	50 tons	kg
Crank	Y218-10	0.50	Y318-10	0.90	Y518-10	1.80
Quick-adjusting nut	Y218-33	1.10	Y318-33	1.80	Y518-33	2.70
Forcing screw	Y218-11	1.70	Y318-11	3.10	Y518-11	7.00
Hollow ram	YRH-202	7.60	YRH-302	11.00	YRH-603	28.00
Ram fixation screws (DIN 912)	(2 x) YP-2013		(2 x) YP-3013		(2 x) YP-5013	
Threaded insert	YDG-20E	0.40	YDG-30E	0.50	YDG-50E	0.70
Plain hole insert	YDB-27E	0.40	YDB-33E	0.50	YDB-55E	0.70
Serrated insert	YDM-20E	0.50	YDM-30E	0.70	YDM-50E	0.90
Hand pump	YHP-320	9.00	YHP-320	9.00	YHP-320	9.00
High-pressure hose	YF-200	1.00	YF-200	1.00	YF-200	1.00
Pressure gauge	YM-235	0.50	YM-235	0.50	YM-235	0.50

Pressure pads for supporting the stem, e.g., on hollow shafts: cf. page 55.

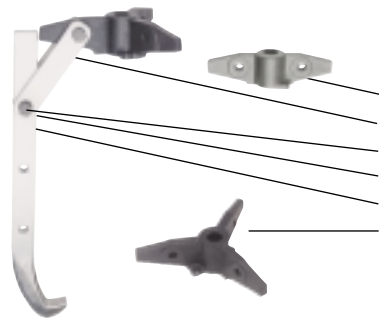

Description	20 tons	kg	30 tons	kg	50 tons	kg
Twin head	Y205-20	2.00	Y305-20	3.60	Y505-20	7.00
Strap	Y205-21	0.50	Y305-21	1.30	Y505-21	2.50
Strap screw	Y205-22	0.20	Y305-22	0.28	Y505-22	0.80
Strap nut	Y205-23	0.04	Y305-23	0.06	Y505-23	0.20
Grip arm (only)	Y205-25	3.20	Y305-25	8.00	Y505-25	16.00
Triple head	Y206-30	3.00	Y306-30	5.30	Y506-30	11.00
Grip arm, complete with straps, cap screws and nuts	Y205-00	4.50	Y305-00	11.00	Y505-00	22.00



Description	20 tons	kg	30 tons	kg	50 tons	kg
Leg nut	Y218-01	0.05	Y318-31	0.15	Y518-01	0.20
Slide plate	Y218-05	0.09	Y318-35	0.60	Y518-02	1.00
Slotted crossbar	Y218-03	4.50	Y318-03	11.00	Y518-03	30.00
Washer	Y218-02	0.03	Y318-32	0.10	same as Y518-02	1.00
Extra leg (1 ea.)	Y218-06	0.90	Y318-36	2.00	-	-
Standard leg (1 piece)	Y218-07	1.50	Y318-37	3.50	Y518-07	8.00
Extra leg (1 ea.)	Y218-08	2.00	Y318-38	5.00	Y518-08	10.50
Extra leg (1 ea.)	Y218-12	0.60	-	-	-	-
Leg end	Y218-09	0.10	Y318-39	0.30	Y518-09	0.50
Leg connector	Y218-31	0.10	Y318-41	0.30	Y518-31	0.40

Note:

Perfect alignment of the hydraulic puller with the part to be withdrawn is very important. Misalignment will create extra bending forces and damage the tool or cause accidents. Before operating under pressure, part and puller should be wrapped securely in a KUKKO® protective blanket (page 92). The exerted forces must be carefully controlled during the pulling action.

Load levels:

The following limits must be adhered to:

max. oper. pressure 700 bar/10.000 psi

Rating	(10 kN = 1 Mp = 1 t)	20 ton	30 ton	50 ton
Puller, 3-arm	max. perm. load	20 ton	30 ton	50 ton
Puller, 2-arm		15 ton	25 ton	45 ton
Extractor with pulling bolt only		15 ton	25 ton	35 ton
Extractor with separator		15 ton	20 ton	30 ton
Extractor with internal puller		10 ton	20 ton	25 ton



Hydraulic Accessories



Hydraulic cylinder rams with collar threads

Single-acting with spring retraction (max. operating pressure: 700 bar/10,000 psi)

Art. no.	Capacity t	Effective kN	Effective area cm ²	Stroke mm	Oil capacity cm ³	Collar thread	Suitable for puller nos.	kg	
YRE-050	4,5	45	6.40	125	5"	80 1 1/2"-16 UN	Y05-208	2.20	046636
YRE-101	10	100	14.50	250	10"	370 2 1/4"-14 UNS	Y10-208	2.20	046551

Hydraulic hollow rams,

Single-acting with spring retraction (max. operating pressure: 700 bar/10,000 psi)
Complete with threaded pressure pad

These hollow rams can be used both for pushing and for pulling. The pressure pads listed below screw into the female thread of the piston rod. The center spindle can be placed directly in the threaded pressure pad, or, if a plain hole pad is being used, fastened and adjusted with the quick-adjusting nut. If a closed, serrated pressure pad is used, the cylinder can function as a hydraulic jack.


Art. no.	Capacity t	Capacity kN	Stroke mm	Overall height retracted mm	Overall height extended mm	Oil capacity cm ³	Center bore dia. mm	Ram outside dia. mm	Collar thread	Suitable for puller nos.	kg	
YRH-202*	20	210	50	160	210	144	27 mm 1 1/16"	100 mm 4"	3 7/8"-12 UN (↓38 mm)	Y20-180 Y20-205 Y20-206	7.60	046711
YRH-206	20	210	150	305	460	470	27 mm 1 1/16"	100 mm 4"	3 7/8"-12 UN (↓38 mm)	Y20-180 Y20-205 Y20-206	14.10	868276
YRH-302*	30	318	63	178	241	294	33 mm 1 19/64"	115 mm 4 17/32"	4 1/2"-12 UN (↓42 mm)	Y30-180 Y30-205 Y30-206	11.00	046896
YRH-603*	57	574	75	260	335	623	55 mm 2 11/64"	160 mm 6 5/16"	6 1/4"-12 UN (↓48 mm)	Y50-180 Y50-205 Y50-206	28.00	046971

YDM




Serrated pressure pad (solid)

YDB



Plain hole pressure pad

YDG



* Tapped pressure pad

Pressure pads for hollow rams

For use with:	Tapped Art. no.	C	Plain hole Art. no.	C	Serrated Art. no.	
YRH-202	YDG-20E	1" -8	YDB-27E	27 mm	YDM-20E	solid
YRH-302	YDG-30E	1 1/4" -7	YDB-33E	33 mm	YDM-30E	solid
YRH-603	YDG-50E	1 5/8" -5 1/2	YDB-55E	55 mm	YDM-50E	solid

* - Hollow rams come with tapped pressure pads as standard equipment.

High-flow couplings

(max. operating pressure: 700 bar/10,000 psi)

With their 3/8" high-flow couplings, the cylinders can be connected up to a pump in a few seconds. The complete coupling, comprising a coupling plug and a coupling sleeve with protective cap, provides a leakage-oil-free connection and rotates freely under pressure.

Operation and maintenance of hydraulic equipment

The operating pressure must never be allowed to exceed 700 bar (10,000 psi). All elements are equipped with 3/8" high-flow couplings as standard equipment. Use a grade of hydraulic fluid that is consistent with specifications ISO-VG-100 (DIN 51519) and/or HLP-100 (DIN 51525). The robust cylinders and pumps are maintenance-friendly. Thanks to their high-quality materials and close-tolerance workmanship, they also have long service lives.

YCR-400



Ram half coupler (sleeve)

YCH-604



Hose half coupler (plug)

Hydraulic Accessories



Max. operating pressure: 700 bar/10,000 psi

Hydraulic hand pump (suitable for all rams)

max. operating pressure: (10 kN = 1 Mp = 1 t)

Sturdy, easy-running type with large oil volume. Single-stage with drain valve, pressure gauge connection and adjustable pressure limiting valve.

Art. no.	Useful oil volume: 700 cm ³	Delivery per stroke: 2.7 cm ³	kg	
YHP-320	Hand pump (only)		5.50	045721
YHP-324	Hand pump with gauge		6.00	045806
YHP-325	Hand pump with gauge and hose		7.00	045981
YHP-326	Hand pump with gauge and hose in metal case		13.00	046483

High-pressure hose (suitable for all rams)

(max. operating pressure: 700 bar/10,000 psi)

Complete with anti-kink spring guard and 3/8" high-flow coupler

Art. no.	Standard length		kg	
YF-200	2000 mm	6 2/3 ft.	1.00	045646

Pressure gauge with adapter (for the hand pump)

Absolutely essential for monitoring the forces exerted by pulling tools with hydraulic pressures in excess of 20 tons.

Art. no.	Standard length		kg	
YM-235	0-700 Bar	0-10.000 psi	0.50	157769



Hydraulic tiptoe pump

Two-stage model, smooth-running for 53 kg of foot-applied force, appropriate for 5-, 10-, 20- and 30-ton cylinders and all type-Y-57 nut splitters.

Art. no.	Description	Oil volume cm ³	kg	
YFP-320	Tiptoe pump, 700 bar (70 MPa)	500	4.8	870880

Electrohydraulic compact pump (suitable for all models)

with 3 meter remote-control cable

Art. no.	Description	kg	
YEP-320*	Electric pump, 700 bar (70 MPa) with 3 m electric connecting cable	12.00	834776

Technical data:

Supply voltage:	220 V	Supply pressure:	700 bar
Frequency:	50 Hz	Tank volume:	1900 cm ³ (1,9 l)
Motor rating:	0.37 kw	Hose connector:	3/8"-18 NPT

* Suitable for all KUKKO hydraulic rams (and rams of other make) with a working pressure of 700 bar (70 MPa) and a 3/8" high-flow coupling system, and for type-series Y-57 nut splitters.



Hydropneumatic „TURBO“ pump

(suitable for all models)

With oscillating air motor for air pressures of 2.8 - 10.2 bar; required air volume: 0.34 m³/min, with 1/4" - 18 NPT air-hose connector

Art. no.	Description	Oil volume cm ³	kg	
YLP-320	TURBO pump 700 bar (70 MPa)	2100	12.5	870903





Protective Blankets



Mechanical three-arm puller at work in combination with a T-UFP-1 protective blanket. Both the puller and the workpiece remain visible and, hence, controllable during the pulling process.




A hydraulic shop press set up with a T-UFP-2 protective blanket. The blanket fully encloses the work, and the work progress can be observed and controlled from start to finish.

Disassembly and pulling work often involves the application of extreme forces. In such a situation, the stressed parts can tear loose, break apart, even practically explode and send debris flying around in all directions.

Such hazards can be countered with the aid of **KUKKO® protective blankets**. Made of highly flexible, highly tensile, oil-resistant material, these transparent blankets wrap around the tool and workpiece before the force is applied. They keep the job safe and enable close observation and control of the entire work sequence.

Protective blankets by KUKKO come in an imitation leather pouch that helps keep them in good condition and fully transparent by protecting them from the effects of prolonged, intensive exposure to sunlight or similar influences.



Art. no.	Dimensions: width x length	For diametric capacities up to:	For depth capacities up to:	kg	
T-UFP-1	500 mm x 1100 mm 20" x 40"	350 mm 14"	400 mm 16"	0.80	445118
T-UFP-2	670 mm x 1500 mm 30" x 60"	500 mm 20"	500 mm 20"	1.50	445293
T-UFP-3	1300 mm x 4000 mm 51" x 156"	1200 mm 44"	1200 mm 44"	8.00	445378

Belt bands can be used to interconnect any number of like-size protective blankets to accommodate practically any workpiece and tool dimensions.



A hydraulic puller and separator at work, with security provided by a T-UFP-3 protective blanket. Both the pulling tool and part to be pulled remain fully visible and, hence, controllable during the pulling process.

KUKKO protective blankets help prevent accidents due to the sudden separation of parts and fragments during pulling and disassembly processes.

To that effect, the pulling tool and the part to be pulled are wrapped in a protective blanket, and the blanket fixed in position by tightening the belt bands, before any force is applied.

Thanks to the blanket's transparency, the pulling process can be closely observed and controlled from start to finish (cf. photos). The blanket holds back shattered fragments and detached parts. In extensive test series, pressing forces up to 100 tons were used to break class-10 bolts. The force of impact - high enough to destroy the compound glass and casing of the pressure gauges - had no effect at all on the protective blankets. Subsequent material testing was not even able to document the slightest visible scratch.

Precautionary Notes and Helpful Hints

All tools must always be used for the intended purposes under the envisioned conditions and within their postulated limitations.


Dos



Check the condition of your tools at regular intervals, and replace any damaged or worn parts.



Keep the threads of all spindles, heads, etc. clean and well oiled.



Before you start work, acquaint yourself with the proper use of the tool or tools in question, with due attention to pertinent safety measures.



If anything at all is unclear about any of the above, it is best to call the factory for some firsthand advice.



Prior to starting work, make sure that the pulling tool is in good working order.



Double-check the tool for correct mounting, and monitor the forces incidental to the pulling process.



Never violate the maximum load data prescribed for the tool in question. Use a torque wrench (page 58; for mechanical/pressure-screw-driven tools) or a pressure gauge (hydraulic/pump-driven tools) to keep tabs on the applied forces. (page 91)



If the tool appears to be overloaded, works sluggishly, or is otherwise negatively conspicuous, interrupt the pulling process, and replace the tool with a larger model.



Always wrap the pulling tool and the workpiece in a protective blanket as a precaution against the potential effects of sudden release (cf. page 92).



Always wear suitable personal protective equipment, including protective goggles.

Don'ts




Never use an electric- or pneumatic-powered impact/hammer drill for driving a pulling tool.



Never use extensions to increase the applied torque.



Never alter a pulling tool or related product in any way.



Since heat detracts from the thermal properties of steel, and since some parts require heating to facilitate their removal, remember to never heat the pulling tool along with the part.



Note

Careful maintenance will guarantee the serviceability and long useful life of your pulling tools..

Guarantee

For all KUKKO products


Any product provenly displaying a defect of material or fabrication - subject to our examination - will be replaced or repaired free of cost

Supply warranty

Wearing parts, e.g., nut-splitter chisels, threaded spindles and extra-slender pulling arms for confined spaces, with accordingly limited loadability, are always kept on stock and available for immediate delivery.

User Information

Pullers with mechanical pressure screws

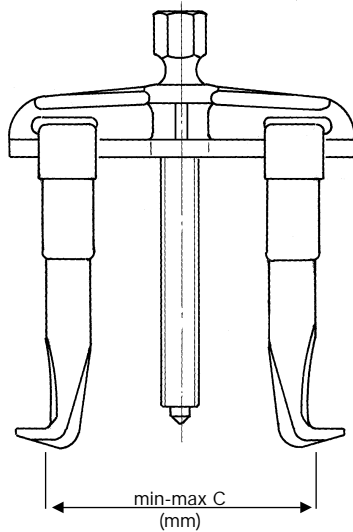


20

Art. no.	KN	max: to.	Nm						K mm	J mm	O mm	H mm	A mm	
20-1	45	4.5	80	614 135	17	70-140			1	3	20	13	31	8
20-10	45	4.5	80	614 135	17	70-180			1	3	20	13	31	8
20-2	60	6	150	621 210	22	100-220			1	4	24	18	40	9
20-20	60	6	150	621 210	22	100-260			1	4	24	18	40	9
20-3	85	8.5	300	626 280	27	180-340			1	5	35	30	67	20
20-30	85	8.5	300	626 280	27	180-440			1	5	35	30	67	20
20-4	120	12	400	633 350	36	200-590			1	5	35	30	67	28
20-40	120	12	400	633 350	36	200-710			1	5	35	30	67	28

20-AV

Art. no.	KN	max: to.	Nm			C mm			K mm	J mm	O mm	H mm	A mm	
20-4-AV	120	12	400	633 500	36	200- 590			2	4	24	43	90	28
20-40-AV	120	12	400	633 500	36	200- 710			2	4	24	43	90	28
20-5	150	15	650	637 600	41	340-1000			2	8	60	52	110	40


20-PLUS

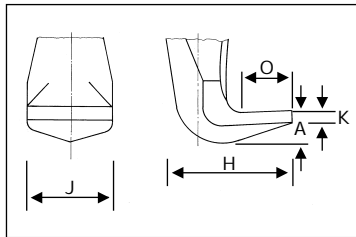

1

Art. no.	KN	max: to.	Nm			C mm			K mm	J mm	O mm	H mm	A mm	
20-1+	45	4.5	80	614 135	17	70-140			1	3	20	13	31	8
20-10+	45	4.5	80	614 135	17	70-180			1	3	20	13	31	8
20-2+	60	6	150	621 210	22	100-220			1	4	24	18	40	9
20-20+	60	6	150	621 210	22	100-260			1	4	24	18	40	9
20-3+	85	8.5	300	626 280	27	180-340			1	5	35	30	67	20
20-30+	85	8.5	300	626 280	27	180-440			1	5	35	30	67	20


20-S

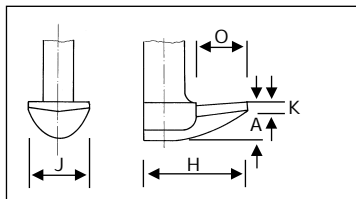

2

Art. no.	KN	max: to.	Nm			C mm			K mm	J mm	O mm	H mm	
20-1-S	25	2.5	35	614 137	13	70-140			3	2	28	7	18
20-10-S	25	2.5	35	614 137	13	70-180			3	2	28	7	18
20-2-S	50	5	120	621 211	17	100-220			3	4.5	32	15	30
20-20-S	50	5	120	621 211	17	100-260			3	4.5	32	15	30
20-3-S	70	7	220	626 281	19	180-340			3	6.5	40	17	40
20-30-S	70	7	220	626 281	19	180-440			3	6.5	40	17	40


20-PLUS S

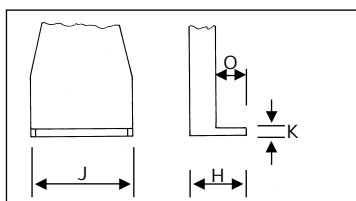

3

Art. no.	KN	max: to.	Nm			C mm			K mm	J mm	O mm	H mm	
20-1+S	25	2.5	35	614 137	13	70-140			3	2	28	7	18
20-10+S	25	2.5	35	614 137	13	70-180			3	2	28	7	18
20-2+S	50	5	120	621 211	17	100-220			3	4.5	32	15	30
20-20+S	50	5	120	621 211	17	100-260			3	4.5	32	15	30
20-3+S	70	7	220	626 281	19	180-340			3	6.5	40	17	40
20-30+S	70	7	220	626 281	19	180-440			3	6.5	40	17	40

Dimensional details are only approximate and are given subject to pertinent modifications and technical progress.

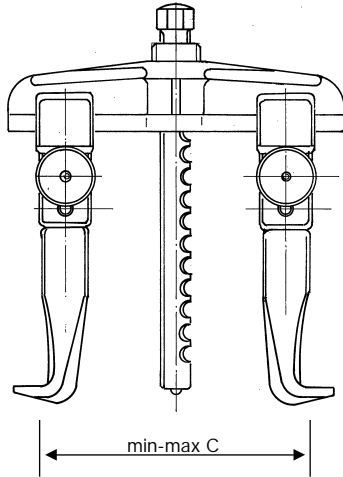

20-Q

Art. no.	KN	max: to.	Nm			C mm			K mm	J mm	O mm	H mm	A mm
20-10-Q	30	3	80	612 165	13	70-180			3	20	13	31	8
20-20-Q	50	5	100	615 240	17	100-260			4	24	18	40	9
20-3-Q	70	7	200	622 320	19	180-340			5	35	30	67	20

20-QS

Art. no.	KN	max: to.	Nm			C mm			K mm	J mm	O mm	H mm
20-10-QS	25	2.5	75	612 165	13	70-180			3	28	7	18
20-20-QS	50	5	100	615 240	17	100-260			4.5	32	15	30
20-3-QS	70	7	200	622 320	19	180-340			6.5	40	17	40

30

Art. no.	KN	max: to.	Nm			C mm			K mm	J mm	O mm	H mm	A mm
30-1	60	6	80	614 135	17	70-140			3	20	13	31	8
30-10	60	6	80	614 135	17	70-180			3	20	13	31	8
30-2	70	7	150	621 210	22	100-220			4	24	18	40	9
30-20	70	7	150	621 210	22	100-260			4	24	18	40	9
30-3	100	10	250	626 280	27	180-340			5	35	30	67	20

30-PLUS


Art. no.	KN	max: to.	Nm			C mm			K mm	J mm	O mm	H mm	A mm
30-1+	60	6	80	614 135	17	70-140			3	20	13	31	8
30-10+	60	6	80	614 135	17	70-180			3	20	13	31	8
30-2+	70	7	150	621 210	22	100-220			4	24	18	40	9
30-20+	70	7	150	621 210	22	100-260			4	24	18	40	9
30-3+	100	10	250	626 280	27	180-340			5	35	30	67	20


30-S

Art. no.	KN	max: to.	Nm			C mm			K mm	J mm	O mm	H mm
30-1-S	30	3	40	614 137	13	70-140			2	28	7	18
30-10-S	30	3	40	614 137	13	70-180			2	28	7	18
30-2-S	50	5	120	621 211	17	100-220			4.5	32	15	30
30-20-S	50	5	120	621 211	17	100-260			4.5	32	15	30
30-3-S	70	7	220	626 281	19	180-340			6.5	40	17	40

30-PLUS S

Art. no.	KN	max: to.	Nm			C mm			K mm	J mm	O mm	H mm
30-1+S	30	3	40	614 137	13	70-140			2	28	7	18
30-10+S	30	3	40	614 137	13	70-180			2	28	7	18
30-2+S	50	5	120	621 211	17	100-220			4.5	32	15	30
30-20+S	50	5	120	621 211	17	100-260			4.5	32	15	30
30-3+S	70	7	220	626 281	19	180-340			6.5	40	17	40

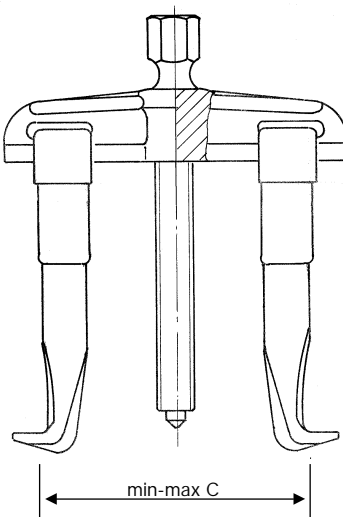




11-A

Art. no.	KN	max. to.	Nm			C mm			K mm	J mm	O mm	H mm	A mm
11-0-A	150	15	500	633 350	36	220-500			5	35	30	67	9
11-1-A	200	20	650	637 350	41	280-600			5	35	30	67	9
11-2-A	200	20	650	637 350	41	290-740			5	35	30	67	9


11-AV

Art. no.	KN	max. to.	Nm			C mm			K mm	J mm	O mm	H mm	A mm
11-0-AV	150	15	500	633 350	36	220-500			4	24	43	90	28
11-1-AV	200	20	650	637 350	41	280-600			4	24	43	90	28
11-2-AV	200	20	650	637 350	41	290-740			8	60	52	110	40

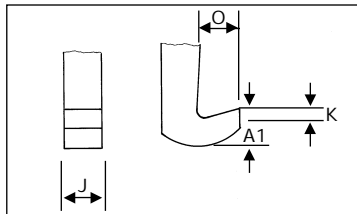


12

Art. no.	KN	max. to.	Nm				K mm	J mm	O mm	A1 mm	A2 mm
12-1	80	8	180	614 135	17		2	14	11	8	-
12-2	90	9	190	618 175	19		3	17	12	8	-
12-3	100	10	250	623 230	24		4	20	15	12	-
12-4	100	10	300	626 355	27		7	18	19	18	30
12-5	100	10	300	626 480	27		7	18	19	18	30
12-6	150	15	280	633 600	36		7	28	22	18	30
12-7	150	15	280	633 600	36		7	28	22	18	30



22

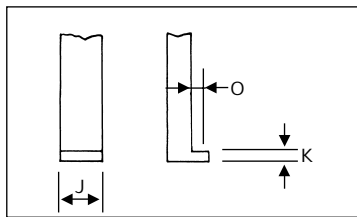


5

14

Art. no.	KN	max. to.	Nm				K mm	J mm	O mm
14-1	25	2.5	50	612 131	13		2.5	21	3.5
14-2	35	3.5	80	616 160	19		3.9	29	3.5
14-3	45	4.5	100	616 202	19		3.9	29	3.5
14-01	10	1	30	612 131	12		2.5	11	3.5
14-03	20	2	40	616 202	19		3.9	12	3.5

18

Art. no.	KN	max. to.	Nm			O	Z
18-0	30	3	40	612 130	14	M 10	612130
18-1	50	5	70	618 175	19	M 10	618175
18-2	70	7	120	621 170	22	M 14 x 1.5	621170
18-3	100	10	280	626 280	27	M 18 x 1.5	626270
18-4	120	12	450	633 425	27	G 5/8"	633425
18-5	150	15	500	637 600	41	G 3/4"	637600

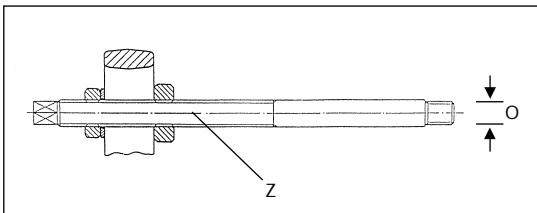


28

Art. no.	KN	max. to.	Nm				K mm	J mm	O mm	A mm
28-1	60	6	120	620 162	24		5	22	14	7.5
28-2	60	6	120	620 172	24		5	22	14	7.5
28-3	80	8	150	620 230	24		5	24	14	7.5
28-4	80	8	150	620 250	24		5	24	14	7.5

41/42




Art. no.	KN	max. to.	Nm				K mm	J mm	O mm	A mm
41-0	10	1.0	25	610 070	13		2	10	7	4
41-1	10	1.0	25	609 087	-		2	10	8	4
41-2	15	1.5	25	609 105	-		2	10	8	4
41-3	30	3.0	40	612 150	13		3	18	12	9
41-4	50	5.0	85	614 200	17		4	24	38	12
41-5	70	7.0	150	621 245	22		4	34	40	13

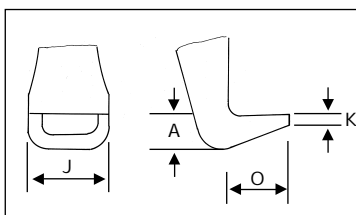




6




Art. no.	KN	max. to.	Nm				K mm	J mm	O mm	A mm
42-0	15	1.5	25	610 070	13		2	10	7	4
42-1	15	1.5	25	609 087	-		2	10	8	4
42-2	15	1.5	25	609 105	-		2	10	8	4
42-3	30	3.0	40	612 150	12		3	18	12	9
42-4	50	5.0	85	614 200	17		4	24	38	12
42-5	70	7.0	150	621 245	22		4	34	40	13


43

Art. no.	KN	max:					K	J	O	A
		to.	Nm							
43-1	10	1	25	609 087	-	7	2	11	10	6
43-2	10	1	25	609 087	-	7	2	11	10	6
43-3	10	1	25	609 105	-	7	2	11	10	6
43-11	15	1.5	25	609 087	-	7	2	11	10	6
43-12	15	1.5	25	609 087	-	7	2	11	10	6
43-13	15	1.5	25	609 105	-	7	2	11	10	6


44/45

Art. no.	KN	max:					K	J	O	A
		to.	Nm							
44-1	30	3	50	612 130	14	7	3	16	9	6
44-2	50	5	85	614 160	17	7	3	17	15	6
44-3	60	6	140	618 210	19	7	3	20	13	9
44-4	70	7	190	623 260	24	7	3	26	22	17
44-5	95	9.5	200	623 325	24	7	3	26	22	17
44-6	95	9.5	200	623 360	24	7	3	26	22	17

Art. no.	KN	max:					K	J	O	A
		to.	Nm							
45-1	40	4	50	612 130	14	7	3	16	9	6
45-2	60	6	120	614 160	17	7	3	17	15	6
45-3	80	8	180	618 210	19	7	3	20	13	9
45-4	95	9.5	200	623 260	24	7	3	26	22	17
45-5	95	9.5	200	623 325	24	7	3	26	22	17
45-6	95	9.5	200	623 360	24	7	3	26	22	17
45-7	95	9.5	200	623 450	24	7	3	10	22	23

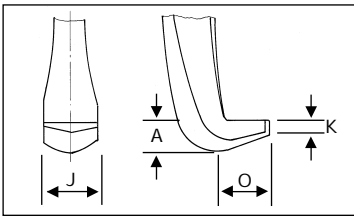

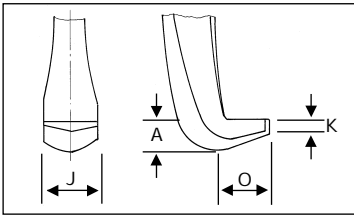


7






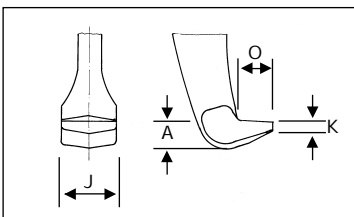
8

46/47




Art. no.	KN	max:					K	J	O	A
		to.	Nm							
46-1-A	120	12	450	633 350	36	8	5	35	23	27
46-2-A	120	12	450	633 500	36	8	5	35	23	27
47-1-A	120	12	450	633 350	36	8	5	35	23	27
47-2-A	120	12	450	633 500	36	8	5	35	23	27

112/113




Art. no.	KN	max:					K	J	O	A
		to.	Nm							
112-1	15	1.5	25	610 110	8	9	5	10	7	6
112-10	15	1.5	25	610 110	8	9	5	10	7	6
112-2	30	3	55	614 135	17	9	5.5	15	8	8
112-20	30	3	55	614 160	17	9	5.5	15	8	8
112-3	40	4	65	616 220	17	9	6.5	20	11	12
112-4	50	5	100	621 355	22	9	8	25	14	16




9

Art. no.	KN	max:					K	J	O	A
		to.	Nm							
113-20	30	3	45	614 160	17	9	5.5	15	8	8
113-3	40	4	60	616 220	19	9	6.5	20	11	12
113-4	60	6	95	621 355	22	9	8	25	14	16
113-5	70	7	160	623 325	24	9	8	25	14	16




200


Art. no.	KN	max:					K	J	O	A
		to.	Nm							
200-1	40	4	60	614 137	13	10	4	21	15	10
200-2	40	4	60	614 137	13	10	4	21	15	10
200-3	50	5	140	621 210	22	10	4	28	19	12
200-4	50	5	140	621 210	22	10	4	28	19	12
200-41	50	5	140	621 210	22	10	4	28	20	12
200-5	50	5	140	621 210	22	10	4	28	19	12
200-51	50	5	140	621 210	22	10	4	28	20	12

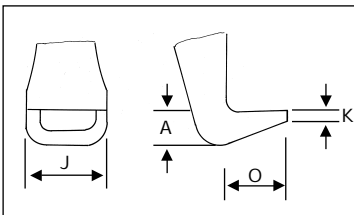

10

301

Art. no.	KN	max:					K	J	O	A
		to.	Nm							
301-1	40	4	60	614 137	13	10	4	21	15	10
301-2	40	4	60	614 137	13	10	4	21	15	10
301-3	50	5	140	621 210	22	10	4	28	19	12
301-4	50	5	140	621 210	22	10	4	28	19	12



201-S/202-S


Art. no.	KN	max. to.	Nm				K1	J1	O1	K2	J2	O2	A1	A2
					mm		mm	mm	mm	mm	mm	mm	mm	mm
201-S	15	1.5	30	614 240	17	11	7.5	6.0	4.0	9.0	8.5	4.0	6	8
202-S	20	2	35	614 240	17	11	7.5	6.0	4.0	9.0	8.5	4.0	6	8

201

Art. no.	KN	max. to.	Nm				K1	J1	O1	K2	J2	O2	A1	A2
					mm		mm	mm	mm	mm	mm	mm	mm	mm
201-0	15	1.5	25	612080	14	11	2.0	11.0	7.0	2.0	11.0	7.0	6	8
201-1	50	5	75	614135	17	11	3.0	15.0	11.0	2.0	9.0	6.0	8	12
201-2	70	7	150	621210	22	11	4.0	26.0	18.0	3.0	20.0	17.0	7	9
201-3	100	10	250	626280	27	11	4.0	26.0	20.0	4.0	26.0	20.0	13	13
201-4	100	10	250	626280	27	11	4.5	26.0	20.0	4.0	26.0	20.0	15	15

202

Art. no.	KN	max. to.	Nm				K1	J1	O1	K2	J2	O2	A1	A2
					mm		mm	mm	mm	mm	mm	mm	mm	mm
202-0	15	1.5	25	612080	14	11	2.0	11.0	7.0	2.0	11.0	7.0	6	8
202-1	50	5	75	614135	17	11	3.0	15.0	11.0	2.0	9.0	6.0	8	12
202-2	70	7	150	621210	22	11	4.0	26.0	18.0	3.0	20.0	17.0	7	9
202-3	100	10	250	626280	27	11	4.0	26.0	20.0	4.0	26.0	20.0	13	13
202-4	100	10	250	626280	27	11	4.5	26.0	20.0	4.0	26.0	20.0	15	15

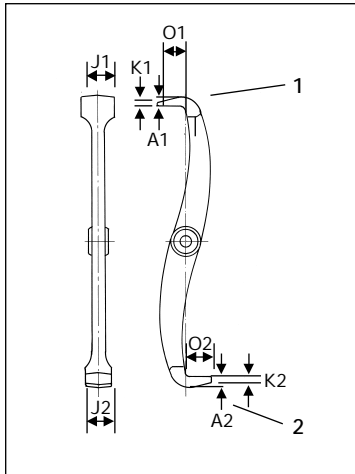


11

203

Art. no.	KN	max. to.	Nm				K1	J1	O1	K2	J2	O2	A1	A2
					mm		mm	mm	mm	mm	mm	mm	mm	mm
203-0	15	1.5	25	612080	14	11	2.0	11.0	7.0	2.0	11.0	7.0	6	8
203-1	50	5	75	614135	17	11	3.0	15.0	11.0	2.0	9.0	6.0	8	12
203-2	70	7	150	621210	22	11	4.0	26.0	18.0	3.0	20.0	17.0	7	9
203-3	100	10	250	626280	27	11	4.0	26.0	20.0	4.0	26.0	20.0	13	13
203-4	100	10	250	626280	27	11	4.5	26.0	20.0	4.0	26.0	20.0	15	15

208/209




Art. no.	KN	max. to.	Nm				K1	J1	O1	K2	J2	O2	A1/A2
					mm		mm	mm	mm	mm	mm	mm	mm
208-0	10	1	20	610110	8	11	5.0	10.0	8.0	4.0	10.0	6.0	5.5
208-01	20	2	20	614160	17	12	3.5	16.0	13.0	-	-	-	7
208-02	25	2.5	50	621210	22	12	4.5	20.0	16.0	-	-	-	10

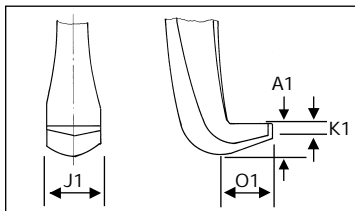




12

Art. no.	KN	max. to.	Nm				K1	J1	O1	K2	J2	O2	A1/A2
					mm		mm	mm	mm	mm	mm	mm	mm
209-0	10	1	20	610110	8	11	5.0	10.0	8.0	4.0	10.0	6.0	5.5
209-01	20	2	20	614160	17	12	3.5	16.0	13.0	-	-	-	7
209-02	25	2.5	50	621210	22	12	4.5	20.0	16.0	-	-	-	10




205

Art. no.	KN	max. to.	Nm		 mm		K mm	J mm	O mm	A mm
205-00	35	3.5	50	612 110	14	13	1.5	14	12	6
205-01	50	5	120	614 160	17	13	3	18	12	10
205-02	70	7	150	621 210	22	13	4	24	16	9
205-1	100	10	280	626 280	27	13	5	30	23	20
205-2	100	10	300	626 400	27	13	5	30	23	20
205-3	120	12	320	626 400	27	13	5	29	17	22




206




Art. no.	KN	max. to.	Nm		 mm		K mm	J mm	O mm	A mm
206-00	35	3.5	50	612 110	14	13	1.5	14	12	6
206-01	50	5	120	614 160	17	13	3	18	12	10
206-02	70	7	150	621 210	22	13	4	24	16	9
206-1	100	10	280	626 280	27	13	5	30	23	20
206-2	100	10	300	626 400	27	13	5	30	23	20
206-3	120	12	320	626 400	27	13	5	29	17	22

207




Art. no.	KN	max. to.	Nm		 mm		K mm	J mm	O mm	A mm
207-00	35	3.5	50	612 110	14	13	1.5	14	12	6
207-01	50	5	120	614 160	17	13	3	18	12	10
207-02	70	7	150	621 210	22	13	4	24	16	9
207-1	100	10	280	626 280	27	13	5	30	23	20
207-2	100	10	300	626 400	27	13	5	30	23	20
207-3	120	12	320	626 400	27	13	5	29	17	22




204/210


Art. no.	KN	max. to.	Nm		 mm		K mm	J mm	A mm
204-0	10	1	10	610 094	-	14	5	18	5.5
204-02	40	4	75	621 130	22	14	4	22	7
204-1	50	5	100	618 105	19	14	6	24	10
204-2	60	6	120	621 130	22	14	3.5	24	10
204-3	75	7.5	175	623 170	24	14	5	24	12

Art. no.	KN	max. to.	Nm		 mm		K mm	J mm	A mm
210-1	50	5	100	621 210	22	14	4	25	12
210-2	80	8	140	623 325	24	14	4	25	12
210-3	100	10	200	623 325	24	14	4	25	12


482/483

Art. no.	KN	max. to.	Nm		 mm		K mm	J mm	O mm	A mm
482-1	15	1.5	25	608 080	-	15	2	8	6	4
482-2	15	1.5	25	608 130	-	15	2.5	8	6	4
482-3	25	2.5	35	612 200	10	15	3	14	8	6
482-4	30	3	40	616 270	13	15	3.5	16	9	7
428-5	30	3	40	616 325	13	15	3.5	16	9	7


Art. no.	KN	max. to.	Nm		 mm		K mm	J mm	O mm	A mm
483-2	15	1.5	25	608 130	-	15	2.5	8	6	4
483-3	25	2.5	35	612 200	10	15	3	14	8	6
483-4	30	3	40	616 270	13	15	3.5	16	9	7
483-5	30	3	40	616 325	13	15	3.5	16	9	7

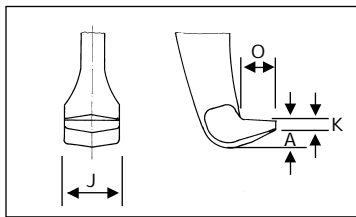

13

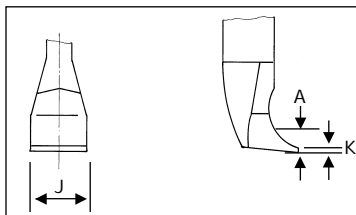

14

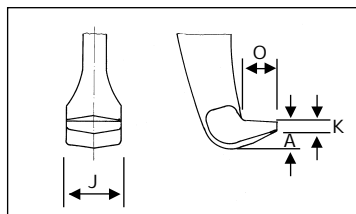


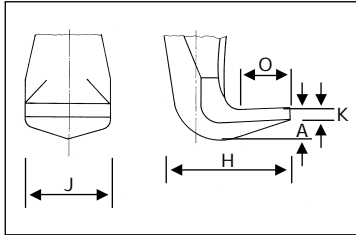
15

User Information


Pullers with hydraulic rams

11-B/BV


Art. no.	max. KN	max. to.	Hydr. Nm	Hydr.	C mm		K mm	J mm	O mm	H mm	A mm
11-0-B	150	15	30	8-1-B	220-500	1	5	35	30	67	28
11-1-B	150	15	45	8-2-K	280-600	1	5	35	30	67	28
11-2-B	200	20	30	8-2-K	290-740	1	5	35	30	67	28
11-3-B	200	20	30	8-2-K	290-740	1	5	35	30	67	28




1


Art. no.	max. KN	max. to.	Hydr. Nm	Hydr.	C mm		K mm	J mm	O mm	H mm	A mm
11-0-BV	150	15	30	8-1-B	220-500	2	4	24	43	90	28
11-1-BV	150	15	45	8-2-K	280-600	2	4	24	43	90	28
11-2-BV	200	20	30	8-2-K	290-740	2	8	60	52	110	40

20-H

Art. no.	max. KN	max. to.	Hydr. Nm	Hydr.	C mm		K mm	J mm	O mm	H mm	A mm
20-4-H	150	15	45	8-1-B	200- 590	2	4	24	43	90	28
20-40-H	150	15	45	8-1-B	200- 710	2	4	24	43	90	28
20-5-H	200	20	30	8-2-M	340-1000	2	8	60	52	110	40

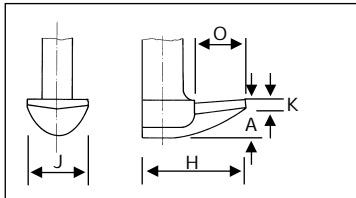


2

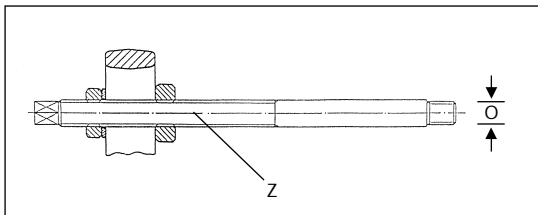


18-4/18-5/818-0

Art. no.	max. KN	max. to.	Hydr. Nm	Hydr.	O	Z
18-4	150	15	45	8-1-B	G 5/8"	633425
18-5	200	20	30	8-2-M	G 3/4"	637600
818-0	100	10	40	800	5/8"-18 UNF	616290


46/47


Art. no.	max. KN	max. to.	Hydr. Nm	Hydr.		K mm	J mm	O mm	A mm
46-1-B	150	15	45	8-1-F	16	5	30	23	27
46-2-B	150	15	45	8-1-F	16	5	30	23	27
47-1-B	150	15	45	8-1-F	16	5	30	23	27
47-2-B	150	15	45	8-1-F	16	5	30	23	27

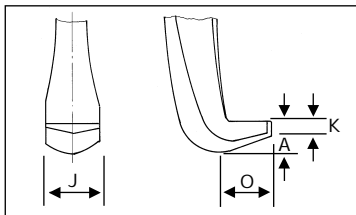

16


209


Art. no.	max. KN	max. to.	Hydr. Nm	Hydr.		K mm	J mm	O mm	A mm
209-2-B	150	15	45	8-1-F	17	5	30	23	20

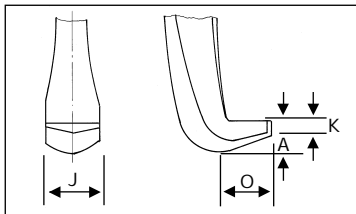

17


820

Art. no.	max. KN	max. to.	Hydr. Nm	Hydr.		K mm	J mm	O mm	H mm
820-0	100	10	40	800	18	5	32	18	40

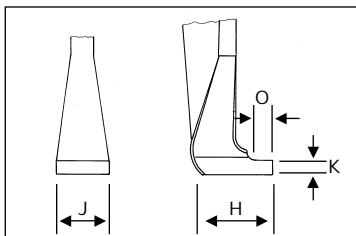










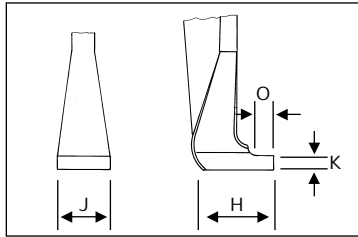


18

844/845



19

Art. no.	KN	max. to.	Nm	Hydr.		K mm	J mm	O mm	H mm
844-1-B	100	10	40	800		6.5	25	12	43
844-2-B	100	10	40	800		6.5	25	11	43
844-3-B	100	10	40	800		6.5	25	16	43
844-4-B	100	10	40	800		6.5	25	16	43
844-5-B	100	10	40	800		6.5	25	14	43

Art. no.	KN	max. to.	Nm	Hydr.		K mm	J mm	O mm	H mm
845-1-B	100	10	40	800		6.5	25	12	43
845-2-B	100	10	40	800		6.5	25	11	43
845-3-B	100	10	40	800		6.5	25	16	43
845-4-B	100	10	40	800		6.5	25	16	43
845-5-B	100	10	40	800		6.5	25	14	43

Hydraulic Rams, Spindle Assemblies and Nut Splitters

Art. no.	KN	max. to.	Nm
8-1	150	15	45
8-2	200	20	30


Art. no.	max.
56-1	60 Nm
56-2	70 Nm

Art. no.	KN	max. to.	Nm	Gew.
10-1	250	25	45	M 76 x 2




Art. no.	KN	max. to.	Nm
9-1	100	10	35
9-2	150	15	50


Art. no.	KN	max. to.	Nm	Gew.
800	100	10	40	W 1 1/2"-16
801	150	15	70	W 1 1/2"-16
802	200	20	100	M 40 x 1.5

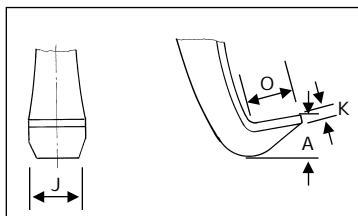„HYD“ Pullers with Pump Hydraulics







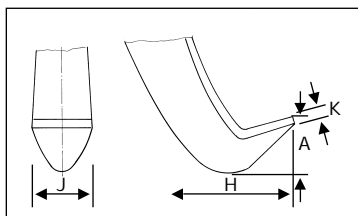



20

Art. no.	KN	max. to.	bar	Hydr.		K mm	J mm	O mm	A mm
Y08-208	45	4.5	700	YRE-050		4	24	15	10
Y18-208	100	10	700	YRE-101		4.5	30	22	22




21

Art. no.	KN	max. to.	bar	Hydr.		K mm	J mm	H mm	A mm
Y28-205	200	20	650	YRH-202		5	29	33	28
Y38-205	300	30	660	YRH-302		5	38	41	34
Y58-205	500	50	610	YRH-603		7	50	47	48

Art. no.	KN	max. to.	bar	Hydr.		K mm	J mm	H mm	A mm
Y28-206	200	20	650	YRH-202		5	29	33	28
Y38-206	300	30	660	YRH-302		5	38	41	34
Y58-206	500	50	610	YRH-603		7	50	47	48

„HYD“ Pulling Tools with Pump Hydraulics

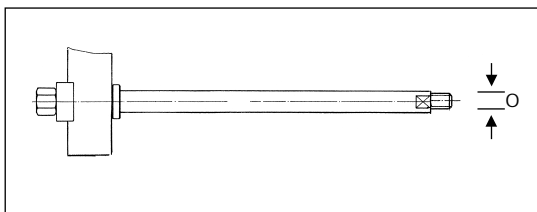

Art. no.	KN	max. to.	bar	Hydr.	O
Y 20-180	200	20	650	YRH-202	5/8"-18 UNF
Y 30-180	300	30	660	YRH-302	1"-12 UNF
Y 50-180	500	50	610	YRH-603	1 3/4"-12 UNF

Alphabetical Index

Article	Page	Article	Page
Adapters, Step-plate	55	Pullers for Steering Wheels/(Universal)	78
Automotive Tools, Special-purpose	66-82	Pullers/Inserters for Studs	75
Bearing Installation Tools	49	Pullers with Claw Feet	24, 25, 78
Blankets, Protective	92	Pullers with Hydraulic Ram and Pump	84-89
Counterstays for Internal Extractors	40, 41	Pullers with Hydraulic Screw, Three-arm	17, 21, 26-31, 57
Disk-brake Tools	72, 73	Pullers with Hydraulic Screw, Two-arm	9, 21, 26-31
Extracting Tools for Parts with Tapped Bores	44, 54	Pullers with Parallel Sliding Arms	8-17, 56
Extractors/Pullers for Ball Bearings	41, 42	Pullers with Preselectable Spread	22
Extractors for Automotive Ball Bearings	40-42, 46-48	Pullers with Quick-acting Spindle Assembly	12
Extractors for Ball Bearings	46-48	Pullers with Self-centering Arms	23, 24
Extractors for Ball Joints	70-72	Pullers with Side Clamps	25, 69, 78
Extractors for Bolts / Screws	60, 61	Pullers with Sliding Hammer	36, 37, 40, 42-44
Extractors for Needle Bearings	43, 82	Pullers with Swivel Arms	21, 32-35, 57
Extractors, Internal	40-43	Pullers, „ECONOMY“	56, 57
Files, Thread	62	Pullers, Combination, Three-arm/Two-arm	32-35, 85
Flange Spreaders	65	Pullers, Hydraulic, Modular - Series „800“	26-31
Hub Pullers, Universal, Hydraulic	68	Pullers, Mechanical, Three-arm	11, 13, 17, 21, 22, 23, 24, 32-37, 60, 66, 67
Hydraulic Cylinders and Accessories	90, 91	Pullers, Mechanical, Two-arm	8-13, 21-25, 32-37, 50, 56, 57
„HYD“ Program	84-91	Pullers, Percussion-type	36, 37, 42, 44, 78
Merchandisers	83	Pullers, Universal	8-17
Nut Splitters, Hydraulic/ Non-hydraulic	62, 63	Pulling and Separating Devices	28, 29, 52-54, 85, 86
Piston-pin Drivers	76	Pulling Chuck	42
Piston-ring Compressors	76	Pulling-tool Sets, Hydraulic	88
Piston-ring Spreaders	76	Pumps, Hand, Hydraulic, Electrohydraulic	63, 89, 91
Precautionary Notes	92, 93	Rams, Hydraulic, Auxiliary, for Pullers	12, 19, 55
Pry Bars	49	Ratchet Handles, Reversing	59
Puller for Light Engineering and Instrument Building	25	Sales Display and Workshop Stands	10, 13, 37, 56
Puller for Speedometer Cables	25	Screw Adapters for Pullers	44, 46, 54
Puller for V-belt Pulleys	54, 67	Separator Pullers	25, 78
Pullers/Extractors for Ball Bearings	41, 42	Separators, Fork-type	49, 70
Pullers for Battery Terminals	23, 33, 66	Slide Hammers for Internal Extractors	36, 37, 40, 42, 44
Pullers for Bearings	50	Socket Sets for Box Wrenches	59
Pullers for Brake Linkage Adjusters	79	Spanners, Slogging	64
Pullers for Cam Wheels	66	Spindle Assemblies, Hydraulic, for Pullers	9, 17-20, 26-31, 55
Pullers for Confined Spaces	10-12, 15, 24	Spreaders, Clamp-spring, „VW“	66
Pullers for Construction-side Application	21	Spring Compressors	74
Pullers for Cylinder Liners	76	Tow-bar Tools, Automotive	79
Pullers for Fan Wheels	32	User Information	94-101
Pullers for Flanged Axles	69	Valve Lifters	77
Pullers for Hubs	68, 69	Wrench, Strap	77
Pullers for Keys / Parallel Keys	43	Wrench, Tight-space	60
Pullers for Small Parts	25	Wrenches, Oil-filter	77
Pullers for Steering Arms	69	Wrenches, Torque	58



Numerical Index

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
1-90-P	8	10-6	68	18-2	53	20-3+S	10	25-N	43	43-3	23	53	75
1-90-S	14	10-A	68	18-3	53	20-30	8	26-A	42	43-11	23	53-6	75
1-91-P	11	10-ERS	68	18-4	53	20-30-3	8	26-B	42	43-12	23	53-7	75
1-91-S	15	10-G	68	18-5	53	20-30-4	8	26-C	42	43-13	23	53-8	75
1-190-P	8	10-M	68	18-0-AS	54	20-30-5	8	26-D	42	44-1	23	53-10	75
1-190-S	14	10-REP	68	18-004A	54	20-30-H	9	28-1	22	44-2	23	53-12	75
1-191-P	11	11-0-A	16	18-005A	54	20-30-S	11	28-2	22	44-3	23	53-16	75
1-191-S	15	11-0-A3	16	18-006A	54	20-30SP	11	28-3	22	44-4	23	54-2	62
1-250-P	8	11-0-A4	16	18-008A	54	20-30+	10	28-4	22	44-5	23	54-2-M	62
1-250-S	14	11-0-A5	16	18-010A	54	20-30+S	10	30-1	14	44-6	23	54-3	62
1-251-P	11	11-0-AV	16	18-012A	54	20-4	8	30-1-2	14	45-1	23	54-3-M	62
1-251-S	15	11-0-B	17	18-016A	54	20-4-3	8	30-1-S	15	45-2	23	55-0	62
2-150-P	8	11-0-BV	17	18-2-AS	54	20-4-4	8	30-1+	15	45-3	23	55-0-M	62
2-150-S	14	11-1-A	16	18-208A	54	20-4-5	8	30-1+S	15	45-4	23	55-1	62
2-151-P	11	11-1-A3	16	18-210A	54	20-4-AV	9	30-10	14	45-5	23	55-1-M	62
2-151-S	15	11-1-A4	16	18-212A	54	20-4-H	9	30-10-2	14	45-6	23	55-2	62
2-300-P	8	11-1-A5	16	18-214A	54	20-40	8	30-10-S	15	45-7	23	55-2-M	62
2-300-S	14	11-1-AV	16	18-216A	54	20-40-4	8	30-10-SP	15	46-1-A	21	55-3	62
2-301-P	11	11-1-B	17	18-218A	54	20-40-5	8	30-10+	15	46-1-B	21	55-3-M	62
2-301-S	15	11-1-BV	17	18-3-AS	54	20-40-H	9	30-10+S	15	46-2-A	21	55-4	62
3-200-P	8	11-2-A	16	18-314A	54	20-40AV	9	30-2	14	46-2-B	21	55-4-M	62
3-200-S	14	11-2-A3	16	18-316A	54	20-5	9	30-2-3	14	46-300	21	56-1	62
3-200-S	14/17	11-2-A4	16	18-318A	54	20-5-H	9	30-2-S	15	46-450	21	56-1-M	62
3-201-P	11	11-2-A5	16	18-320A	54	20-ST	10	30-2+	15	47-1-A	21	56-1ERS	62
3-201-S	15	11-2-AV	16	18-322A	54	20-ST+	10	30-2+S	15	47-1-B	21	56-1REP	62
3-300-P	8	11-2-B	17	18-324A	54	21-0	40	30-20	14	47-2-A	21	56-2	62
3-300-S	14/17	11-2-BV	17	19-1-P	53	21-00	40	30-20-3	14	47-2-B	21	56-2-M	62
3-301-P	11	11-3-B	17	19-2-P	53	21-01	40	30-20-S	15	48	66	56-2ERS	62
3-301-S	15	12-1	22	19-3-P	53	21-02	40	30-20-SP	15	49-01	61	56-2REP	62
3-400-P	8	12-2	22	19-4-P	53	21-1	40	30-20-T	13	49-02	61	65-0	74
3-400-S	14/17	12-3	22	19-5-P	53	21-2	40	30-20+	15	49-03	61	65-1	74
3-400-S	14	12-4	22	20-1	8	21-3	40	30-20+S	15	49-04	61	65-2	74
3-401-P	11	12-5	22	20-1-2	8	21-4	40	30-3	14	49-05	61	66-1	74
3-401-S	15	12-6	22	20-1-S	11	21-5	40	30-3-3	14	49-06	61	66-2	74
3-500-P	8	12-7	22	20-1+	10	21-6	40	30-3-4	14	49-0-S	61	66-3	74
3-500-S	14/17	13-2	54	20-1+S	10	21-7	40	30-3-5	14	49-1	61	69-A	48
3-500-S	14	13-3	54	20-10	8	21-8	40	30-3-S	15	49-2	61	69-B	48
3-501-P	11	14-01	24	20-10-2	8	21-9	40	30-3+	15	49-3	61	69-C	48
3-501-S	15	14-03	24	20-10-Q	12	21-40	43/82	30-3+S	15	49-4	61	70-1	46
4-SP-P	9	14-1	24	20-10-S	11	21-41	43/82	30-3-SP	15	49-5	61	70-2	46
4-SP-S	17	14-2	24	20-10SP	11	21-42	43/82	31-1	78	49-6	61	70-3	46
5-SP-P	9	14-3	24	20-10+	10	21-43	43/82	31-2	78	49-7	61	70-4	46
8-1	19	15-0	52	20-10+S	10	21-44	43/82	32-1	78	49-8	61	70-4730	46
8-1-B	9/17	15-1	52	20-10-QS	12	21-45	43/82	32-2	78	49-9	61	70-4731	46
8-1-B	18/55	15-2	52	20-2	8	21-46	43/82	33	78	49-A	61	70-4733	46
8-1-ERS	19	15-3	52	20-2-3	8	21-89	41	34-0	78	49-B	61	70-4734	46
8-1-F	18	15-4	52	20-2-S	11	21-90	41	34-1	78	49-C	61	70-711	46
8-1-REP	19	15-5	52	20-2+	10	22-0	40	38	69	49-T-1	61	70-712	46
8-2	19	15-A	53	20-2+S	10	22-01	40	40-3	69	49-T-2	61	70-713	46
8-2-ERS	19	15-B	53	20-20	8	22-09	40	40-3-1	69	49-T-3	61	70-721	46
8-2-K	17/18	15-C	53	20-20-3	8	22-1	40	40-3-8	69	49-T-4	61	70-722	46
8-2-M	9/18/55	15-D	53	20-20-Q	12	22-1-AS	44	40-5	69	49-T-5	61	70-731	46
8-2-REP	19	15-K	53	20-20-S	11	22-2	40	41-0	33	49-T-A	61	70-732	46
8-B	19	16	76	20-20SP	11	22-3	40	41-1	33/66	49-U-B	60	70-A	47
8-F	19	16-21	41	20-20+	10	22-4	41	41-2	33	49-U-11	60	70-B	47
8-K	19	16-22	41	20-20+S	10	22-5	41	41-3	33	49-U-12	60	70-K	47
8-M	19	17-0	52	20-20-QS	12	22-089	40	41-4	33	49-U-13	60	71	49
9-1	19/55	17-1	52	20-3	8	22-090	40	41-5	33	49-U-14	60	97-1	62
9-1-ERS	19	17-2	52	20-3-3	8	23	42	42-0	33	49-U-15	60	97-2	62
9-1-REP	19	17-3	52	20-3-4	8	24-A	41	42-1	33	50-1	75	97-3	62
9-2	19/55	17-A	53	20-3-5	8	24-B	41	42-2	33	50-2	75	97-4	62
9-2-ERS	19	17-B	53	20-3-H	9	24-C	41	42-3	33	50-3	75	100-0	76
9-2-REP	19	17-C	53	20-3-Q	12	25-A	41	42-4	33	51-1	75	100-1	76
10-1	68	17-K	53	20-3-QS	12	25-B	41	42-5	33	51-2	75	100-2	76
10-3	68	18-0	53	20-3-S	11	25-C	41	43-1	23/66	51-3	75	100-3	76
10-5	68	18-1	53	20-3+	10	25-K	41	43-2	23	52	75	101-1	76

Numerical Index

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
101-2	76	200-ST	56	230	44/69	84410073	31	Y-521-E	86/88	Y318-33	88/89
102-0	76	200-U	56	301-1	56	ABZ 100-H	27	Y05-207	85	Y318-35	89
102-1	76	200-UM	56	301-2	56	ABZ 150-H	27	Y05-208	85	Y318-36	88/89
103-1	77	201-0	32	301-3	56	ABZ 200-H	29	Y08-208	85	Y318-37	89
103-2	77	201-1	32	301-4	56	ABZ 250-H	29	Y10-207	85	Y318-38	88/89
103-3	77	201-2	32	406	64	AVLW-1	83	Y10-208	85	Y318-39	89
104	77	201-3	32	407-A	60	EVLW-1	83	Y18-208	85	Y318-41	88/89
105-0	77	201-4	32	482-1	24	K-20-15	13	Y20-180	86/88	Y505-00	89
105-1	77	201-S	32	482-2	24	K-65-A	79	Y20-205	87	Y505-20	88/89
108-1	77	202-0	32	482-3	24	K-203	34	Y20-206	87/88	Y505-21	89
112-1	50	202-1	32	482-4	24	K-20204	83	Y28-180	86	Y505-22	89
112-10	50	202-2	32	482-5	24	K-20210	83	Y28-200	88	Y505-23	89
112-2	50	202-3	32	482-DP	24	K-20315	34	Y28-205	87	Y505-25	89
112-20	50	202-4	32	483-2	24	K-2030S	11	Y28-206	87	Y506-30	89
112-3	50	202-S	32	483-3	24	P-207	34	Y28-218	88	Y518-01	89
112-4	50	203-0	32	483-4	24	P-20715	35	Y28-256	88	Y518-02	89
113-20	50	203-1	32	483-5	24	P-84445	27	Y30-180	87	Y518-03	89
113-3	50	203-2	32	800	20/26/31	T-014-0	25	Y30-205	87	Y518-07	89
113-4	50	203-3	32	801	20	T-071-L	49	Y30-206	87/88	Y518-08	88/89
113-5	50	203-4	32	802	20	T-073-1	80	Y38-180	86/88	Y518-09	89
118-0	66	204-0	25	800-050	20/26/31	T-073-2	80	Y38-205	87	Y518-10	88/89
119-0	66	204-02	25	800-100	20/26/31	T-073-4	80	Y38-206	87	Y518-11	88/89
119-1	66	204-1	25/69	800-150	20/26/31	T-073-5	81	Y38-300	86	Y518-31	88/89
123	72	204-2	25/69	800-ERS	26	T-073-6	81	Y38-318	88	Y518-33	88/89
124	67	204-3	25/69	800-REP	20/26	T-073-7	82	Y38-356	88	YCH-604	90
124-K	67	205-00	33	801-REP	20	T-074-1	82	Y50-180	86/88	YCR-400	90
125	67	205-01	33	802-REP	20	T-123-2	49	Y50-205	87	YDB-27E	89-90
126-00	73	205-02	33	818-0	28	T-123-3	49	Y50-206	87/88	YDB-33E	88-90
126-01	73	205-1	33	818-021	28/31	T-129-6	72	Y58-180	86	YDB-55E	88-90
126-02	73	205-2	33	818-100	29	T-138-1	79	Y58-205	87	YDG-20E	89/90
126-03	73	205-3	33	818-150	29	T-138-2	79	Y58-206	87	YDG-30E	89/90
126-04	73	206-00	33	818-215	29	T-139-1	43	Y58-500	88	YDG-50E	89/90
126-10	73	206-01	33	818-250	28/31	T-140-1	79	Y58-518	88	YDM-20E	89/90
126-20	72	206-02	33	818-280	31	T-140-2	79	Y58-556	88	YDM-30E	89/90
127	73	206-1	33	818-820	31	T-141-1	79	Y205-00	89	YDM-50E	89/90
128-1	70	206-2	33	820-0	28	T-141-2	79	Y205-20	88/89	YEP-320	91
128-2	70	206-3	33	820-225	28/31	T-142-1	79	Y205-21	89	YF-200	63/89
128-3	70	207-00	33	844-020	31	T-204-V	69	Y205-22	89	YF-200	91
128-4	70	207-01	33	844-1-B	26	T-721-10	58	Y205-23	89	YFP-320	63/91
128-5	70	207-02	33	844-100	31	T-721-30	58	Y205-25	89	YHP-320	63/89
129-0	71	207-1	33	844-150	31	T-721-NF	58	Y206-30	89	YHP-320	91
129-1	71	207-2	33	844-2-B	26	T-G-XXX	80-82	Y218-01	89	YHP-324	63/91
129-2	71	207-3	33	844-200	31	T-GG-XX	80-82	Y218-02	89	YHP-325	63/88
129-3	71	208-0	57	844-250	31	T-UFP-1	92	Y218-03	89	YHP-325	91
129-4	71	208-01	57	844-251	31	T-UFP-2	92	Y218-05	89	YHP-326	63/91
129-5	71	208-02	57	844-3-B	26	T-UFP-3	92	Y218-06	88/89	YLP-320	88/89
129-3-A	71	209-0	57	844-4-B	26	Y-18-17	55	Y218-07	89	YLP-320	91
129-3-H	71	209-01	57	844-5-B	26	Y-19-17	55	Y218-08	88/89	YM-235	89/91
129-4-H	71	209-02	57	844-626	27/31	Y-20-17	55	Y218-09	89	YRE-050	90
129-5-H	71	209-2-B	57	845-000	31	Y-57-24	63	Y218-10	88/89	YRE-101	90
133	64	210-1	25/78	845-1-B	26	Y-57-32	63	Y218-11	88/89	YRH-202	88-90
135-1	70	210-2	25/78	845-150	27	Y-57-41	63	Y218-12	89	YRH-206	90
135-2	70	210-3	25/78	845-2-B	26	Y-57-50	63	Y218-31	88/89	YRH-302	88-90
135-3	70	220	36	845-250	27	Y-57-60	63	Y218-33	88/89	YRH-603	88-90
135-4	70	220-02	36	845-3-B	26	Y-215-2	28/31	Y305-00	89		
135-5	70	220-03	36	845-4-B	26	Y-215-2	86/87	Y305-20	88/89		
160-1	65	220-T	37	845-5-B	26	Y-215-3	28/31	Y305-21	89		
160-2	65	221-G	42	845-851	27	Y-215-3	86/88	Y305-22	89		
165-E	65	223	44	845-855	30	Y-215-4	28/31/86	Y305-23	89		
200-1	56	223-GH	44	845-858	30	Y-221-E	86/88	Y305-25	89		
200-2	56	223-K	43	1020-00	59	Y-315-4	86	Y306-30	89		
200-3	56	224-1	42	1030-00	59	Y-315-5	86/88	Y318-03	89		
200-4	56	224-2	42	1040-00	59	Y-321-E	86/88	Y318-10	88/89		
200-5	56	224-121	42	1021-K	59	Y-515-5	86/87	Y318-11	88/89		
200-41	56	224-221	42	1031-K	59	Y-515-6	86/88	Y318-31	89		
200-51	56	224-GH	42	1041-K	59	Y-515-7	86	Y318-32	89		



DIN ISO 9001 CERT



The Puller Specialist - since 1919