

www.ciecanada.com





# **ANOTHER FIRST FOR RHODIUS!**

Our innovation blocks moisture for a longer-lasting improved power.

Even when they are not in use: resin-bonded wheels age and their performance diminishes over time. During the storage of wheels, moisture penetrates between the bond matrix and the abrasive grains and weakens the bond. Rhodius has come up with a formula, HydroProtect that slows down the aging process by inhibiting the absorption of moisture for up to 10 months keeping the performance of the wheels almost constant after months of storage. This keeps the cutting performance at a permanently high level from the manufacture of the wheel through to the actual time of use.

Products in the HydroProtect line are XT8 EXACT, XT35 CROSS, XT10, XT20, XT38, XT67 and XT24. Get that extra protection for your performance!



## XTRA THIN CUTTING WHEELS

Full line catalogue available at www.ciecanada.com






# XT67 / XTK67

PROLINE ••O

#### For steel or stainless steel

- · Long life & fast cutting times
- For thin walled tubes, profiles and sheet metal
- Reliable and precise
- Outstanding price-performance ratio

<b>(4)</b>	thickness x arbour 3/64" x 7/8"	TYPE 1 thickness x arbour 1/16" x 7/8"	TYPE 27 thickness x arbour .045" x 7/8"	вох
T)				QTY
41/2"	A2180347	A2180350	A2180386	50
5"	A2180348	A2180351	A2180387	50
6"		A2180352	A2180384	25
7"		A2180353	A2180385	25



# XT70 / XTK70

### ALPHALINE 00

#### For steel or stainless steel

- Low development of burrs
- High cutting speed
- Long lifetime
- Cool cut

<b></b>	TYPE 1 thickness x arbour 1/16" x 7/8"	thickness x arbour .045" x 7/8"	BOX QTY
41/2"	A2180590	A2180560	50
5"	A2180591	A2180561	50



# XT10 / XTK10



#### For steel or stainless steel

- Powerful disc
- Extremely accurate
- Fast cut with superior life

	TYPE 1 thickness x arbour 1/16" x 7/8"	TYPE 27 thickness x arbour .045" x 7/8"	
<b>⊕</b>			BOX QTY
41/2"	A2180403	A2180413	50
5"	A2180404	A2180414	50
6"	A2180405	A2180415	25
7"	A2180406	A2180416	25



**XT24** 

### TOPLINE •••

#### For aluminum

- No clogging
- · Long lifetime
- Cool cut

TYPE 1  thickness x arbour 1/16" x 7/8"  QT		
41/2"	A2180291	50
5"	A2180292	50
6"	A2180293	25
7"	A2180294	25

## **BRAINTOOLS**

### XTK8 EXACT

World's Thinnest Cutting Wheel!

#### For steel or stainless steel

- Ideal for hospital & kitchen equipment manufacturing
- Precise, cool cutting, no discolouration or distortion of the workpiece
- Ideal for thin steel & stainless steel sheets



thickness x arbour .032" x 7/8"		BOX QTY
41/2"	A2180461	50
5"	A2180462	50





# **GAS SAW WHEELS**



### **FT30**



#### For steel

- · Hard robust wheel
- · Easy cutting & long life
- External heavy duty reinforcing on both sides

<b>⊕</b>	arbour 20mm	arbour 7/8"	arbour 1"	BOX QTY
		A2180602 A2180605		25 10

# **HEAVY DUTY WHEELS**



### FTK33



#### For steel or stainless steel

- Suitable for solid material, pipes and profiles, hardened steels, or stainless steel alloys
- Tough! A must for heavy applications
- High cutting speed
- · Smooth cutting & long life

<b>⊕</b>	thickness x arbour 3/32" x 7/8"	TYPE 27 thickness x arbour 1/8" x 7/8"	BOX QTY
41/2"	A2180544	A2180545	25
5"	A2180546	A2180547	25
6"		A2180540	25
7"		A2180549	25

# **BLENDING &**

FS1 FUSION

- High stock removal
- No clogging
- Cool grinding



# **CHOP SAW WHEELS**



**ST34** 



#### For steel or stainless steel

- Quick, easy cutting
- Minimal burr build up
- Designed for chop saws up to 3 H.P.
- · Reinforced on both sides

<b>⊕</b>	TYPE 1 thickness x arbour 3/32" x 1"	TYPE 1 thickness x arbour 1/8" x 1"	BOX QTY
12"	A2180701	A2180702	10
14"	A2180703	A2180704	10

# Braintools<sup>®</sup>



# FINISHING The FS1 FUSION

Specially Designed For Grinding Fillet Welds Combines the long life of a grinding disc with the fine grinding pattern of a flap disc.

#### Material

- · Rust & acid proofed steels
- · High tensile / high alloyed steels
- · Hardened steels
- · Structural steels
- Tool steels
- Grey cast iron
- Hardox

### Application Examples

- Fillet weld treatment
- Surface grinding
- Burr removing
- Welding seams
- · Weld seam preparation

Two different thicknesses to suit your application and three grit levels to suit your finishing.



arbour x7/8"	40G	60G	80G	BOX QTY
<b>4</b> 1/2"x3/16"	A3180251	A3180252	A3180253	10
<b>4</b> 1/2"x1/4"	A3180526	A3180527	A3180528	10
<b>5"</b> x3/16"	A3180261	A3180262	A3180263	10
<b>5"</b> x1/4"	A3180536	A3180537	A3180538	10

# XTK35 CROSS THE ORIGINAL XTRA THIN GRINDING & CUTTING

# BRAINTOOLS

The XTK35 CROSS delivers extra thin precise cutting and light grinding with one disc



#### For steel or stainless steel

- One wheel THREE Operations: cuts, light grinds & deburrs
- Eliminates changing wheels = fewer work interruptions
- Extremely safe due to 3 full layers of fibreglass reinforcing
- Available in 4 1/2" & 5"





Three full layers of reinforcing composing the XTK35 Cross guarantees high stability and maximum on the job safety.

	TYPE 27	
( <del>4 T +</del> )		BOX
		QTY
41/2"	A3180651	25
5"	A3180652	25



### **GRINDING WHEELS**

Full line catalogue available at www.ciecanada.com



# **KSM**



#### For steel

- · Very aggressive wheel for carbon steel
- Long life with fast metal removal

TYPE 27 thickness x arbour 1/4" x 7/8"		
41/2"	A1180495	25
5"	A1180497	25
7"	A1180500	10



### RS2



#### For steel & stainless steel

- Smooth grinding
- · Longer life
- · Faster metal removal

thickness x arbour  1/4" x 7/8"  BOX QTY			
41/2"	A1180507	25	
5"	A1180508	25	
6"	A1180517	10	
7"	A1180509	10	



# **RS63**



### For steel & stainless steel

- Extremely long life
- New formulation of bonding & grain mixtures
- Very FAST metal removal

<b>⊕</b>	TYPE 27 thickness x arbour 1/4" x 7/8"	BOX QTY
41/2"	A1180431	25
5"	A1180432	25
7"	A1180434	10

### **Grinding Discs**

The hardness of a grinding disc determines it's lifetime as well it's stock removal and it's stock removing efficiency.

A soft grinding disc is much more aggressive and offers a comfortable grinding behaviour.

A hard grinding disc is characterized by it's long lifetime. We recommend hard grinding discs for edge grinding. Soft grinding discs can be used for surface grinding.

Rhodius grinding discs are made in a thickness of 7mm and with a special top layer. Grinding discs, unlike flap discs are characterized by their high stock removal and cutting efficiency as well as lifetime.



### **RS24**



#### For aluminum/ non-ferrous metals

- Does not clog or load up
- High stock removal and good life

<b>(</b>	TYPE 27 thickness x arbour 1/4" x 7/8"	BOX QTY
41/2"	A1180533	25
5"	A1180536	25
7"	A1180534	10

### **FLAP DISCS**

Full line catalogue available at www.ciecanada.com





# LSZ F VISION

For steel, stainless steel, plastic and wood

- Unique to Rhodius
- Cooler grinding reduces heat build up and discolouration

arbour x7/8"	40G	60G	80G	
<b>⊕</b>				BOX QTY
4 <sub>1/2"</sub>	C318016611 C318017111	C318016711 C318017211		10 10





# LSZ F TOPLINE


### TOP PERFORMANCE

For steel, stainless steel, plastic and wood

- Longer lasting
- Cool grinding

TYPE 27 Also available in flat

arbour <b>x7/8</b> " angled	40G	60G	80G	BOX QTY
41/2"	C31801852	C31801862	C31801872	10
5"	C31802022	C31802032	C31802042	10
7"	C31801932	C31801942	C31801952	10





# LSZ F2

### ALPHALINE 00

## **UBER VALUE**

For steel, stainless steel, plastic and wood

- Optimum angle for maximum metal removal
- Super value

arbour <b>x7/8</b> " angled	40G	60G	80G	BOX QTY
41/2"	C31801661	C31801671	C31801681	10
5"	C31801711	C31801721	C31801731	10



# LSZ F3 ALPHALINE OO DON'T LET THE PRICE FOOL YOU!

For steel, stainless steel, plastic and wood

- Amazing metal removal
- · Extremely long life

arbour x7/8" angled	40G	60G	80G	BOX QTY
41/2"	C31801668	C31801678	C31801688	10
5"	C31801718	C31801728	C31801738	10





### **WIRE BRUSHES**

Full line catalogue available at www.ciecanada.com

# SHAFT MOUNTED BRUSHES

#### **TWIST KNOT END**





<b>⊕</b>	length	wire size	RPM RPM	CARBON
3/4" 1 1/4"				G1220158 G1220159

- Durable brush ideal for paint, slag, burr removal, weld seems and spot welds
- The twist knot wire gives this brush an even more aggressive action

<b>⊕</b>	length	wire size	RPM (RPM)	ST/STEEL
3/4" 1 1/4"	11/4" 11/4"	.010"		G1220189 G1220190

#### **CRIMPED WIRE END**

#### 1/4" Shank



<b>⊕</b>	length	wire size	RPM RPM	CARBON
5/8" 3/4"	1" 1"			G1220150 G1220151

- High resistance wire perfect for frontal applications
- For removal of paint, rust and primer
- Cleaning of moulds and castings

<b>⊕</b>	length	wire size	RPM (RPM)	ST/STEEL
5/8"	1"	0118"		G1220185
3/4"	1"	.0118"		G1220186

#### **CRIMPED CIRCULAR**



<b>⊕</b>	length	wire size	RPM (RPM)	CARBON
15/8"	1/2"	.0118"	20,000	G1220160
2"	1/2"	.0118"	20,000	G1220163
3"	5/8"	.0118"	12,000	G1220165

- For surface preparation for hard to reach areas
- Light deburring and removal of corrosion and paint
- Used for trimming of casting joints and rubber to metal bonded parts

1/4" Shank

<b>⊕</b>	length	wire size	RPM RPM	ST/STEEL
2"	1/2"	.0118"	20,000	G1220193
3"	5/8"	.0118"	12,000	G1220196



# Designed for tough demanding applications

Material:

Steel

Stainless Steel

Non-ferrous metals


Application:

Rust/ scale removal

Weld spatter

Deburring

Cleaning castings/ forgings





Wire brushes are used in many industries including: Pipeline construction, foundries, ship building, oil and gas industries and construction. These brushes are available in either Carbon Steel wire or Stainless Steel wire.

### **WIRE BRUSHES**

### WIRE WHEEL BRUSHES

Full line catalogue available at www.ciecanada.com



#### TWIST KNOT BEVEL BRUSH



	3/0	i i dibe	Jui	
É.	wire size RPM			CARBON
F			.,	G1220110 G1220111

- Simply incredible for tough applications including paint, scale and corrosion
- Angle brush for hard to reach areas edges, corners and internal corners
- Providing the convenience of both a cup and wire brush

5/8-11 arhour

<b>(1)</b>	wire size	RPM RPM	ST/STEEL
4"	.015"	20,000	G1220133
5"	.020"	15,000	G1220134

#### TWIST KNOT WHEEL 2-3 times the life of the competition



		100000000000000000000000000000000000000	
<b>⊕</b>	wire size	RPM (RPM)	CARBON
41/2"	.020"	15,000	G1220008
5"	.020"	15,000	G1220014
6"	.020"	10,000	G1220013

- Excels on large diameter pipe for cleaning of root and cap welds
- Removing residues of adhesive, hard scale rust and paint

5/8-11 arbour

Extra long life, heavy duty construction

<b>⊕</b>	wire size	RPM (RPM)	ST/STEEL
41/2"	.020"	15,000	G1220027
5"	.020"	15,000	G1220033
6"	.020"	10,000	G1220032

#### STRINGER BEAD



<b>⊕</b>	wire size	RPM (RPM)	CARBON
41/2"	.020		G1220006
5" 6"	.020"		G1220011 G1220010

- Designed for narrow root passes and restricted access applications
- · Heavy duty construction gives extra long life

<b>⊕</b>	wire size	RPM (RPM)	ST/STEEL
41/2"	.020"	15,000	G1220025
5"			G1220019
6"	.020"	10,000	G1220030

# **CUP BRUSHES**

#### **CRIMPED WIRE CUP**



	5/8-11 arbour				
,	<b>⊕</b>	wire size	RPM (RPM)	CARBON	
	3"	.012"	12,500	G1220051	

- For light removal of paint, rust, etc.
- No aggressive scoring of the workpiece

<b>(</b>	wire size	RPM (RPM)	ST/STEEL
3"	.012"	12,500	G1220081

#### TWIST KNOT CUP



5/8-11 arbour				
wire size RPM  Ø RPM			CARBON	
3"	.020"	12,500	G1220041	

- Heavy duty removal of rust, paint, weld splatter, etc.
- Tight twist gives extra long life

<b>⊕</b>	wire size	RPM (RPM)	ST/STEEL
3"	.020"	12,500	G1220062

#### TWIST KNOT BRIDLED CUP



5/8-11 arbour CARBON Ø .020" 12,500 **G1220091** .020" 8,500 **G1220093** 

- Tight twist and bridle gives aggressive action for removal of heavy spatter, rust, etc.
- The support ring of the special design prevents excessive spreading of the fill material
- When worn down simply "knock off" the bridle to expose more brush length

<b>⊕</b>	wire size	RPM (RPM)	ST/STEEL
3" 4"	.020"		G1220102 G1220104



# LASER LEVELS/CONSTRUCTION LASERS

Full line catalogue available at www.ciecanada.com

# autoCROSS 3 KIT



#### PULSED SELF-LEVELLING CROSSLINE LASER

- Self levelling crossline laser
- Horizontal and vertical lines can be switched on separately
- Take unit out of self-levelling mode and lock line in place allowing to set unit in any angle
- Accuracy 3mm/10m (.12"/ 32')
- Indoor/outdoor range with optional receiver 30 m (100')



# NAUTILUS IPX7



#### **SELF LEVELLING WATERPROOF**

- Horizontal operation
- Indoor/outdoor range with receiver 500 m (1500')
- Accuracy 2.6mm/30m (0.1"/98")
- Battery life 50 hours
- Robust aluminum casing
- · Shock protection



### autoMAGIC



#### **CROSSLINE AND 5 BEAM LASER ALL IN ONE**

- Self levelling mechanism
- · Automatic out-of-level sensing
- No beam shaking when bumped
- 5 laser beams at a time
- Indoor/outdoor range with optional receiver 50 m (150')
- Accuracy 3mm/10m (.12"/ 32')



### uniLASER AHV KIT



#### **SELF LEVELLING CONSTRUCTION LASER**

- For horizontal and vertical applications with plumb beams up and down
- Indoor/outdoor range with receiver 300 m (1000 ft)
- Accuracy 3mm/30m (.12"/ 98')
- · Battery life 20 hours
- Complete set with receiver and remote control in a stable plastic storage and transport case



# topoMAT IPX5 Includes robust

carrying case and inclinometer

Lockable 90° tilting joint



#### **SELF LEVELLING/ONE PERSON OPERATION**

- Rainproof
- Automatic laser-stop function in case of change in position
- Horizontal/vertical operation remote control
- Indoor/outdoor range with receiver 500 m (1500')
- Accuracy 2.6mm/30m (0.1"/98')
- Battery life 70 hours
- Shock protection





### TAPE MEASURES

Full line catalogue available at www.ciecanada.com




### RADIUS case

#### LARGE CRANK ARM AND PARK POSITION

- Easy grip soft touch surface
- Slide bearing shells for highest winding comfort

#### **Radius Case White Enamelled**



#### Radius Case Isolan

mm/inch

<b>⊕</b>	
20m 30m	L3505225020 BHF L3505235030 BHF
30m	L33U3Z33U3U BHF

# **BASIC** frame



<b>⊕</b>	
30m	L3505325030 BHF
50m	L3505345050 BHF

#### HIGH IMPACT PLASTIC FRAME

 Flextop prevents the notorious breakage of the highly stressed first 10cm of the tape

#### **Basic Frame White Enamelled**

<b>⊕</b>	
30m	L3501315030 BHF
50m	L3501335050 BHF
100m	L3501345100 BHF





#### White Enamelled

Concave, tempered springblade steel with anti-corrosive phosphate coating



#### Isolan

Carbon steel Yellow synthetic resin, polyamide coating



**FLEXTOP** tip made of transparent, highly flexible plastic, reliably prevents breakage at the tape commencements.



For all steel measuring tapes 13mm, pull ring made of break-proof plastic, 2 notches for weights.




BHF: Hookring with FLEXTOP tip, measurement commencement B.



# **ERGOLINE** frame




#### **Ergoline Frame Isolan**



#### **BALL BEARINGS FOR HIGHEST WINDING CONVENIENCE**

- Park position for crank arm and tape commencement ring
- Ergonomically shaped frame with easy to grip, soft rubber protrusions

#### **Ergoline Frame White Enamelled**



# TAPE STRUCTURE

- Concaved, tempered spring blade steel of high stability
- 2. Anti-corrosive phosphate coating
- 3. Synthetic resin, stoved
- 4. Printed graduation with red meter figures
- 5. Clear varnish to protect against wear, stoved






### **LEVELS**

Full line catalogue available at www.ciecanada.com

## WINKELSTAR

 $\bullet$  Foldable multiple angle square can be adjusted between 0 $^{\circ}$  and 270 $^{\circ}$ 

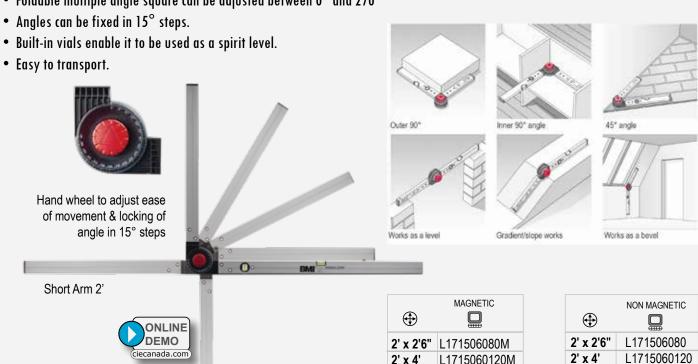

# TRAPEZOID TORPEDO

#### **GREAT FOR ALL CONSTRUCTION TRADES**

- 2 vials
- Heavy weight, very high torsion-resistance trapezoid shaped aluminum die cast level
- Red powder-coated body
- Measuring accuracy 1.0 mm/m normal position





L1715060120M

# **TORPEDO**

#### IDEAL FOR DRYWALL, CONSTRUCTION AND SCAFFOLD ERECTION

- Top end vial excellent for vertical measurements
- 2 Ultrasonic welded vials (magnifying)
- Highly accurate inverted measurement 0.5mm/m



Vial with MAGNIFYING effect means No more double bubble trouble

2' x 4'



<b>⊕</b>	NON MAGNETIC
8"	L1692020

<b>(</b>	MAGNETIC		
8"	L1692020M		
10"	L1692025M		



### SPIRIT LEVELS




Full line catalogue available at www.ciecanada.com

# **EUROSTAR**

# BEST SUITED FOR PIPING, FITTING, PLUMBING, CONCRETE AND CERAMIC INSTALLATION

- Sturdy box design 2" x 3/4" with 1/16" wall thickness
- 2 % slope markings ideal for plumbing, concrete and ceramic installations
- Laser marked vials provide 0.5mm/m accuracy for a lifetime
- Reflection free vials, no more double bubble trouble




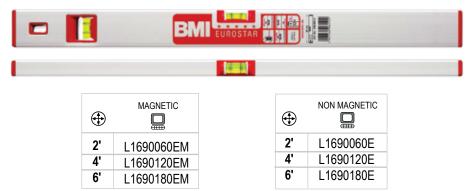

### **ROBUST**

# DESIGNED FOR THE JOB SITE, ALL CONSTRUCTION APPLICATIONS AND RENOVATION PROJECTS

- EXTRA STRONG 4 chamber profile 2mm thick a must for the professional
- Original BMI crescent shaped vial with magnifying effect in regular or inverted position
- Highest accuracy for life due to BMI patented ultrasonically welded vials









#### ◆ Models containing the letter D have hand holes

<b>①</b>	MAGNETIC
2'	L1698060M
4'	L1698120DM
6'	L1698180DM

<b>⊕</b>	NON MAGNETIC
2'	L1698060
4'	L1698120D
6'	L1698180D

# **MASONS FRIEND**



#### **TOUGH 4 CHAMBER PROFILE - 2mm thick**

- 2 stainless steel strips (1 with graduation)
- Ultrasonically welded vials (magnifying)
- Accuracy 0.5mm/m in normal or inverted position
- Black anodized

Vial with crescent shape to ensure .05mm/m accuracy in inverted position







### FIBRE DISCS

# **Standard Quality**

#### APPLICATION

- Heavy duty sanding
- Weld removal
- Sheet metal
- Steel plates

#### Steel

- Special aluminum oxide full resin fibre discs
- Excels in a wide variety of applications
- No harmful additives for a safer working environment

### **AFR**



For steel, cast iron and structural steel

#### 41/2" x 7/8"

		BOX QTY
C1185201	24G	25
C1185202	36G	25
C1185204	50G	25
C1185205	60G	25
C1185206	80G	25
C1185207	100G	25
C1185208	120G	25

<b>5"</b> x 7/8"	<b>①</b>	
		BOX QTY
C1185221	24G	25
C1185222	36G	25
C1185224	50G	25
C1185225	60G	25
C1185226	80G	25
C1185227	100G	25
C1185228	120G	25

<b>7"</b> x 7/8"	<b>①</b>	
		BOX QTY
C1185241	24G	25
C1185242	36G	25
C1185244	50G	25
C1185245	60G	25
C1185246	80G	25
C1185247	100G	25
C1185248	120G	25

### **High Performance**

#### **APPLICATION**

- Heavy duty sanding
- Weld removal
- Sheet metal
- Steel plates
- Edge deburring

#### Steel / Stainless Steel

- Zirconia full resin bonded fibre discs
- Sharpens itself in use
- Cool grinding action reduces glazing and loading

### **ZFR**



For steel, stainless steel, cast iron and structural steel

### 41/2" x 7/8" 🕀

		BOX QTY
C1185351	24G	25
C1185352	36G	25
C1185354	50G	25
C1185355	60G	25
C1185356	80G	25

5"	v	7	/8"	<b>(1)</b>
J	Х		10	(+7

		BOX QTY
C1185361	24G	25
C1185362	36G	25
C1185364	50G	25
C1185365	60G	25
C1185366	80G	25

7" x 7/8" ⊕

		BOX QTY
C1185371	24G	25
C1185372	36G	25
C1185374	50G	25
C1185375	60G	25
C1185376	80G	25

# **FLEXIBLE**

#### **ADVANTAGES**



- · High quality backing pad
- Suitable for heavy duty use
- Flexible
- Extremely wear resistant

## **BACKING PADS**



### **TURBO**

#### **ADVANTAGES**

- · Heavy duty back pad
- Extra cooling ribs and air vents provide cooling action
- · Air flow cooling action extends life of the disc
- · Especially effective on stainless steel and alloys

#### For steel, stainless steel & non-ferrous metals

<b>⊕</b>	ARBOUR	
41/2"	5/8-11"	C2180904
5"	5/8-11"	C2180906
7"	5/8-11"	C2180908

#### For steel, stainless steel & non-ferrous metals

<b>①</b>	ARBOUR	
41/2"	5/8-11"	C2180951
5"	5/8-11"	C2180953
7"	5/8-11"	C2180955

### **CLAMPS**

Full line catalogue available at www.ciecanada.com







The market leader for: All steel screw clamps, hand vises, heavy duty clamps and more!

# **ALL STEEL FITTER CLAMPS**

#### **MEDIUM DUTY FITTER'S CLAMP**

OPENING	THROAT	CLAMPING PRESSURE	
8"	4 3/4"	1800 lb	J3473020
10"	4 3/4"	1800 lb	J3473025
12"	4 3/4"	1800 lb	J3473030
16"	4 3/4"	1800 lb	J3473040
20"	4 3/4"	1800 lb	J3473050
24"	4 3/4"	1800 lb	J3473060

#### **HEAVY DUTY FITTER'S CLAMP**

OPENING	THROAT	CLAMPING PRESSURE	
10"	4 3/4"	2660 lb	J3475025
12"	5 1/2"	2660 lb	J3475030
20"	5 1/2"	2660 lb	J3475050
31"	5 1/2"	2660 lb	J3475080
40"	4 3/4"	2660 lb	J3475100
50"	4 3/4"	2660 lb	J3475125
60"	4 3/4"	2660 lb	J3475150

#### **EXTRA HEAVY DUTY FITTER'S CLAMP**

OPENING	THROAT	CLAMPING PRESSURE	
12"	7"	4880 lb	J3480030
16"	7"	4880 lb	J3480040
20"	7"	4880 lb	J3480050
24"	7"	4880 lb	J3480060
31"	7"	4880 lb	J3480080
40"	7"	4800 lb	J3480100



**REPLACEABLE** PRO PAD tilts < 35°

#### **KEY FEATURES INCLUDE**


- LOCKING HANDLE
- SPECIAL PRESSURE PAD Screw-on type, tilts  $< 35^{\circ}$ , gun metal finish, easily replaceable
- ECONOMICAL
- DROP-FORGED, HEAT TREATED **GALVANIZED SLIDING ARM**



Check out our line of **KUKKO** Pullers on our website

www.ciecanada.com



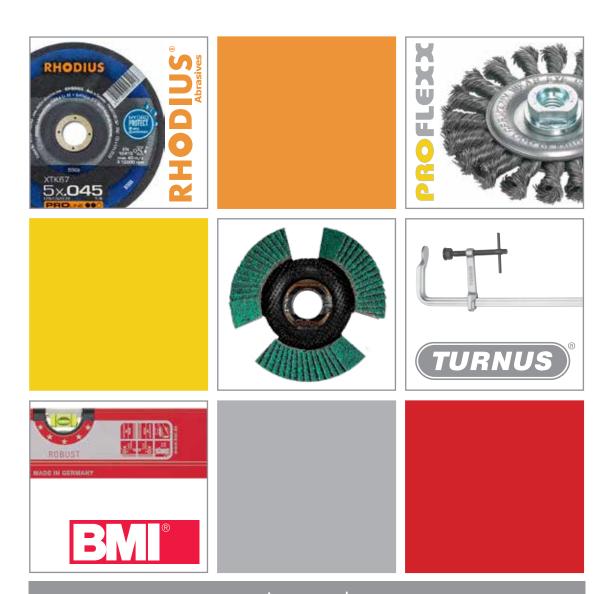

www.ciecanada.com

